



# NS0-506<sup>Q&As</sup>

NetApp Certified Implementation Engineer - SAN, Clustered Data  
ONTAP

**Pass NetApp NS0-506 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/ns0-506.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers






### QUESTION 1

Click the Exhibit button.

Referring to the exhibit, which entry is appropriate to add to a zone on the FC switch?

Exhibit:

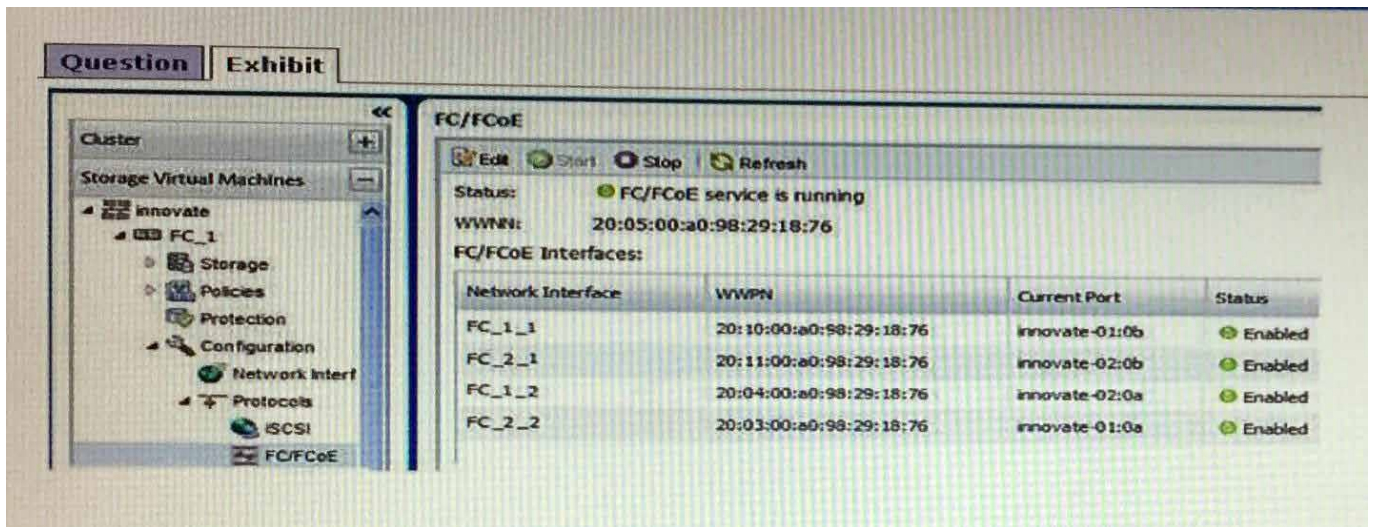

A. 20:05:00:a0:98:29:18:76

B. 20:10:00:a0:98:29:18:76

C. 20:14:00:a0:98:29:18:76

D. 50:10:00:a0:98:29:18:76

Correct Answer: A

### QUESTION 2

When designing a new SAN solution, which three components should be verified with the IMT? (Choose three.)

A. the connection protocol

B. the patch panel make and model

C. host OS type and version

D. the type of Ethernet switch

E. the clustered Data ONTAP version

Correct Answer: CDE



### QUESTION 3

Exhibit

```
cl01::>fcportname show Vserver
```

```
svm1 n1_6a 20:06:00:a0:98:1c:c3:1a svm1 n1_6b 20:07:00:a0:98:1c:c3:1a svm1 n2_6a 20:08:00:a0:98:1c:c3:1a svm1  
n2_6b 20:09:00:a0:98:1c:c3:1a svm2 fc-1-6a 20:0d:00:a0:98:1c:c3:1a svm2 fc-1-6b 20:0e:00:a0:98:1c:c3:1a
```

In the exhibit, two columns do not have names.

What are the two missing names? (Choose two.)

- A. WWNN
- B. Logical Interface
- C. Physical Interface
- D. WWPN

Correct Answer: BD

---

### QUESTION 4

What is a NetApp-recommended zoning best practice?

- A. Switch port zoning should always be employed.
- B. WWNN zoning is required.
- C. Single-initiator zoning is recommended.
- D. Zones can overlap.

Correct Answer: C

---

### QUESTION 5

Exhibit

```
cl01::>igroup show -vserver svm1 VserverIgroup Protocol OS Type Initiators svm1 esx_cluster mixed vmware
```

```
20:00:00:25:b5:11:a0:01,
```

```
20:00:00:25:b5:11:b0:01,
```

```
iqn.1998-01.com.vmware:esx02
```

```
cl01::>
```

A customer is provisioning storage for two ESXi hosts using FCoE with CNA adapters. The customer mapped the LUN to the igroup shown in the exhibit. After scanning for new devices, the LUN is only seen by one of the ESXi hosts.



What caused the problem?

- A. One of the hosts is added in the igroup via iSCSI IQN.
- B. The igroup protocol needs to be configured as FCP.
- C. The switch zoning configuration does not include the correct initiators.
- D. The LIFs are not on their home ports.

Correct Answer: A

[NS0-506 PDF Dumps](#)

[NS0-506 Study Guide](#)

[NS0-506 Braindumps](#)