



1Y0-440^{Q&As}

Architecting a Citrix Networking Solution

Pass Citrix 1Y0-440 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/1y0-440.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Citrix
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which markup language can a Citrix use along with NITRO API to create a StyleBook?

- A. GML
- B. XML
- C. HTML
- D. YAML

Correct Answer: D

Reference: <https://docs.citrix.com/en-us/netscaler-mas/12/stylebooks/how-to-create-your-ownstylebooks.html>

QUESTION 2

Scenario: Based on a discussion between a Citrix Architect and a team of Workspacelab members, the MPX Logical layout for Workspacelab has been created across three (3) sites.

The requirements captured during the design discussion held for a NetScaler design project are as follows:

1.
Two (2) pairs of NetScaler MPX appliances deployed in the DMZ and internal network.
2.
High Availability will be accessible for each NetScaler MPX
3.
The external NetScaler MPX appliance will be deployed in multi-arm mode.
4.
The internal NetScaler MPX will be deployed in single-arm mode wherein it will be connected to Cisco ACI Fabric.
5.
All three (3) Workspacelab sites: Dc, NDR and DR, will have similar NetScaler configurations and design.

How many NetScaler MPX appliances should the architect deploy at each site to meet the design requirements above?

- A. 4
- B. 12
- C. 6
- D. 2



Correct Answer: C

QUESTION 3

Scenario: A Citrix Architect has configured NetScaler Gateway integration with a XenApp environment to provide access to users from two domains: vendorlab.com and workslab.com. The Authentication method used is LDAP.

Which two steps are required to achieve Single Sign-on StoreFront using a single store? (Choose two.)

- A. Configure Single sign-on domain in Session profile `userPrincipalName`.
- B. Do NOT configure SSO Name attribute in LDAP Profile.
- C. Do NOT configure sign-on domain in Session Profile.
- D. Configure SSO Name attribute to `userPrincipalName` in LDAP Profile.

Correct Answer: BD

Reference: <https://docs.citrix.com/en-us/storefront/3-12/plan/user-authentication.html>

QUESTION 4

Scenario: A Citrix Architect needs to design a new multi-datacenter NetScaler deployment. The customer wants NetScaler to provide access to various backend resources by using Global Server Load Balancing

(GSLB) in an Active-Active deployment.

Click the Exhibit button to view additional requirements identified by the architect.

GSLB Requirements
<ul style="list-style-type: none">• Users should be directed to the nearest available datacenter when they initiate a connection to a backend resource.• The nearest datacenter should be determined by the least Time to First Byte (TTFB) among all the available services, as evidenced by response code 200.• Services with fewer active connections should also be prioritized.

Which GSLB algorithm or method should the architect use for the deployment, based on the stated requirements?

- A. Dynamic round trip time (RTT)
- B. Least response time
- C. Static proximity
- D. least connection
- E. Least packets



F. Source IP hash

Correct Answer: B

Reference: <https://docs.citrix.com/en-us/netscaler/12/global-server-load-balancing/methods/configuringalgorithm-based-methods.html>


QUESTION 5

Scenario: A Citrix Architect needs to design a hybrid XenApp and XenDesktop environment which will include as well as resource locations in an on-premises datacenter and Microsoft Azure.

Organizational details and requirements are as follows:

1.
Active XenApp and XenDesktop Service subscription
2.
No existing NetScaler deployment
3.
Minimization of additional costs
4.
All users should connect directly to the resource locations containing the servers which will host HDX sessions

Click the Exhibit button to view the conceptual environment architecture.

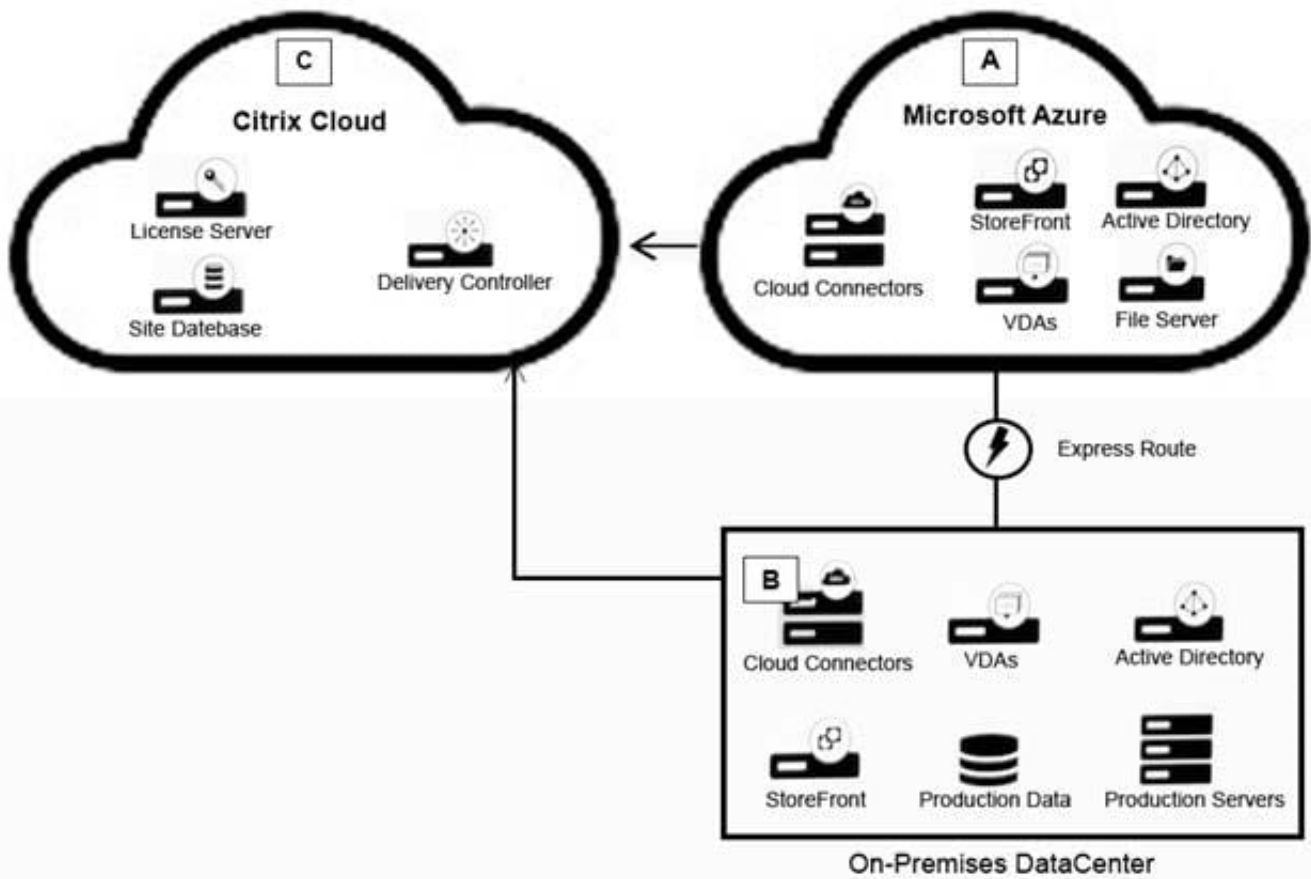

The architect should use _____ in Location A, and should use _____ in Location B. (Choose the correct option to complete the sentence.)

- A. No NetScaler products; NetScaler ICA Proxy (cloud-licensed)
- B. NetScaler Gateway as a Service; NetScaler ICA Proxy (cloud-licensed)
- C. NetScaler Gateway as a Service; no NetScaler products
- D. No NetScaler products; NetScaler Gateway appliance
- E. NetScaler gateway as a Service; NetScaler ADC (BYO)

Correct Answer: C

[Latest 1Y0-440 Dumps](#)

[1Y0-440 Practice Test](#)

[1Y0-440 Exam Questions](#)