



210-065^{Q&As}

Implementing Cisco Video Network Devices

Pass Cisco 210-065 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/210-065.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

How does a Cisco TCS process incoming video calls?

- A. Recording Alias > Template > Media Server Configuration
- B. Recording Alias > Media Server Configuration > Template
- C. Recording Alias > Media Server Configuration > H.323 > Template
- D. Recording Alias > Workflow > Template > Media Server Configuration

Correct Answer: A

http://www.cisco.com/c/en/us/td/docs/telepresence/tcs/5_0/administration/guide/tcs_5_0/recording_aliases.html

QUESTION 2

Refer to the exhibit.

The screenshot shows the Cisco TelePresence Diagnostics interface. The top navigation bar includes Home, Call Control, Configuration, Diagnostics (selected), and Maintenance. The user is logged in as L3_Support. The main heading is 'Troubleshooting' with buttons for 'Deactivate standby' and 'Re-run diagnostics'. Below the heading, a message states: 'Diagnostics that helps to identify issues that may cause the TelePresence system to underperform or fail to work as expected.' There are three diagnostic messages:

- WARNING: Network Speed Auto Negotiation**
Cisco recommends enabling Ethernet autonegotiation on both ends of an Ethernet link. Ensure that both the device and the switch have network speed autonegotiation enabled.
- WARNING: Echo Cancellation Delay**
High delay in audio loop detected. Highest delay: 170ms
This TelePresence system has been setup in a non-optimal manner and is not providing an optimal TelePresence experience. The delay in the output path is currently so high that the HDMI audio output arrives outside the time envelope where the acoustic echo canceller is operating. The system has automatically corrected this, at the cost of added delay on its output. If the output TV/monitor has a gaming mode or low latency mode it should be activated.
- OK: System Name**
The device has a system name set.

The customer recently connected a new TV monitor to the Cisco TelePresence endpoint. This device is now showing a warning concerning the echo cancellation delay. Which action could help mitigate this issue?


- A. Turn off any postprocessing settings.
- B. Turn off 3D mode on the new TV.
- C. Turn on Frequency Scan Acceleration for the new TV.
- D. Turn off surround sound on the new TV.

Correct Answer: A



QUESTION 3

Refer to the exhibit.

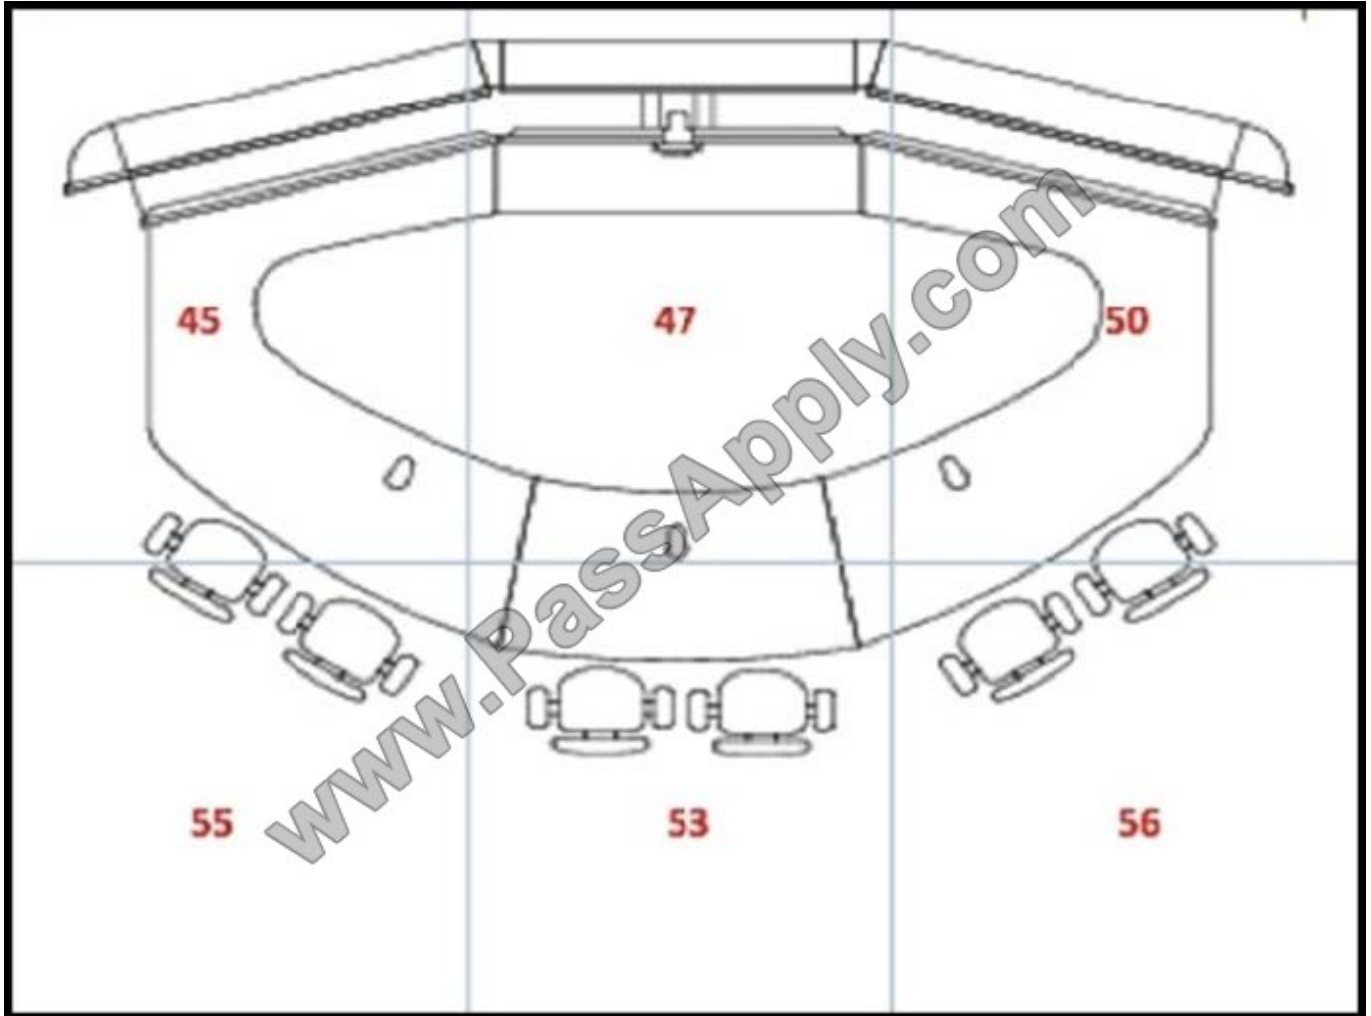

Acoustic measurements for ambient noise were taken on a candidate for an Immersive Cisco TelePresence room. The numbers on the floor plan represent the dBA readings for each of the six areas of the room.

Considering Cisco best practices, what can you conclude about the current acoustic situation in the room?

- A. Only one area is within the noise levels that are recommended by Cisco.
- B. Only one area is not within the noise levels that are recommended by Cisco.
- C. All areas are within the noise levels that are recommended by Cisco.
- D. Two areas are within the noise levels that are recommended by Cisco.

Correct Answer: A

High Ambient Noise Levels The background noise level should be less than 36 dBA and 54 dBC for a Cisco TelePresence room. This level is an ideal threshold for background noise in most audio-video communication environments. However, sound levels are usually higher in a commercial office environment. Because of this, Cisco



recommends lowering background noise to at least 45 dBA and 60 dBC. The Cisco TelePresence system will continue to operate properly with background noise at even higher levels; however, the sound quality begins to suffer. Background noise above 45 dBA begins to compete with the intelligibility of human speech, and these noises become distracting for participants. The Cisco TelePresence system may be able to filter out the background noise for participants at the other end of the call, but the in-room experience is still degraded for the local participants, who must endure a meeting in a loud environment. In extreme cases, such as when background levels exceed 55 dBA for a sustained period of time, gating or sound-suppression effects may occur in the Cisco TelePresence audio. These effects occur when the system can no longer distinguish between background noise and speech, ultimately causing the system to suppress most sound because it identifies that sound as background noise. The most common causes of background noise are as follows: Noise from HVAC air movement Noise from HVAC machinery or other machinery External sounds such as street traffic Adjacent room noise (server rooms, break rooms, bathrooms, or kitchens)

Reference: http://www.cisco.com/c/dam/en/us/solutions/collateral/collaboration-endpoints/c07-643449-00_tp_dg.pdf

QUESTION 4

Refer to the exhibit. Under which tab can the log file for the endpoint be found?

Cisco

Diagnostics	Configuration	Call Control	Maintenance	User admin
-------------	---------------	--------------	-------------	------------

System Information

General		H323	
System name:	pod1-C60	Number:	5001
Software version	TC8.1.4.296090	ID:	C60-h323@dca221.host
Product:	TANDBERG Codec C60	Gatekeeper:	172.31.221.70
Serial number:	F1AD48DOC010	Status:	Registered
IP address:	172.29.25.113		
MAC address	00:50:60:0D:29:21	SIP	
Valid release key	Yes	URL:	C60@dca221.rest
Installed options.	Natural Presenter, MultiStc,		
PremiumResolution		Proxy:	172.31.221.70
		Status:	Registered

- A. Diagnostics
- B. Configuration
- C. Call Control
- D. Maintenance

Correct Answer: A



QUESTION 5

A technician is trying to troubleshoot real-time call information from the CLI of a VCS. Which command should the technician enter?

- A. xstatus
- B. xconfiguration
- C. xfeedback
- D. xhistory
- E. xcommand

Correct Answer: C

xFeedback: these commands provide information about events as they happen, such as calls and registrations.

Reference: http://www.cisco.com/c/dam/en/us/td/docs/telepresence/infrastructure/vcs/admin_guide/Cisco_VCS_Command_Reference_X6.pdf

[210-065 PDF Dumps](#)

[210-065 Practice Test](#)

[210-065 Study Guide](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !


- 100% Guaranteed Success
- 100% Money Back Guarantee
- 365 Days Free Update
- Instant Download After Purchase
- 24x7 Customer Support
- Average 99.9% Success Rate
- More than 800,000 Satisfied Customers Worldwide
- Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.passapply.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

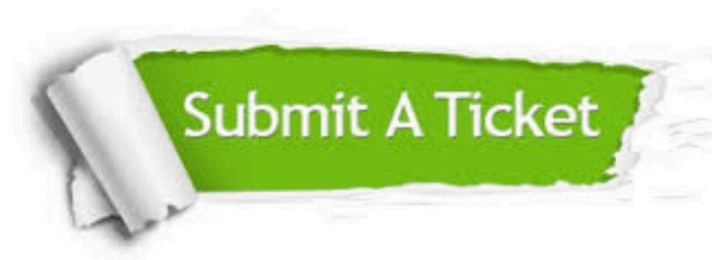

 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © passapply, All Rights Reserved.