



300-620^{Q&As}

Implementing Cisco Application Centric Infrastructure (DCACI)

Pass Cisco 300-620 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/300-620.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


An engineer must implement management policy and data plane separation in the Cisco ACI fabric. Which ACI object must be created in Cisco APIC to accomplish this goal?

- A. Application profile
- B. Tenant
- C. Contract
- D. Bridge domain

Correct Answer: B

QUESTION 2

Refer to the exhibit.

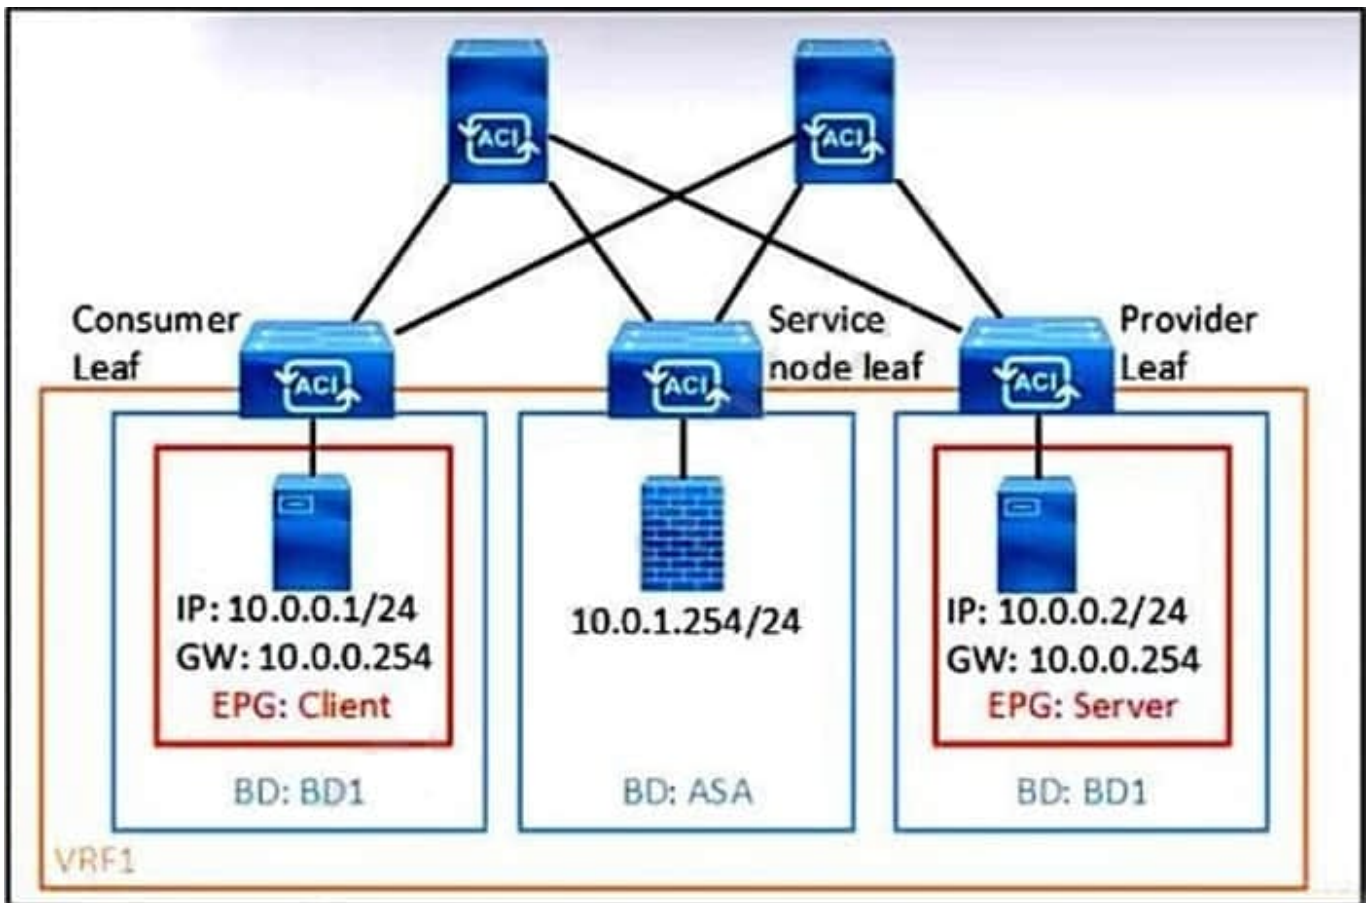

What must be configured in the service graph to redirect HTTP traffic between the EPG client and EPG server to go through the Cisco ASA firewall?

- A. precise filter to allow only HTTP traffic



- B. permit-all contract filter
- C. contract with no filter
- D. contract filter to allow ARP and HTTP.

Correct Answer: A

ARP and other bcast and mcast traffic should never be redirected to PBR device.

QUESTION 3

An ACI administrator notices a change in the behavior of the fabric. Which action must be taken to determine if a human intervention introduced the change?

- A. Inspect event records in the APIC UI to see all actions performed by users.
- B. Inspect `/var/log/audit_messages` on the APIC to see a record of all user actions.
- C. Inspect audit logs in the APIC UI to see all user events.
- D. Inspect the output of show command history in the APIC CLI.

Correct Answer: C

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/all/faults/guide/b_APIC_Faults_Errors/b_IFC_Faults_Errors_chapter_010.html

QUESTION 4

An engineer must allow multiple external networks to communicate with internal ACI subnets. Which action should the engineer take to assign the prefix to the class ID of the external Endpoint Group?

- A. Enable the Export Route Control Subnet for the External Endpoint Group flag.
- B. Enable an L3Out with Shared Route Control Subnet.
- C. Configure subnets with the External Subnets for External EPG flag enabled.
- D. Configure subnets with the Import Route Control Subnet flag enabled.

Correct Answer: C

QUESTION 5

A RADIUS user resolves its role via the Cisco AV Pair. What object does the Cisco AV Pair resolve to?

- A. tenant
- B. security domain



C. primary Cisco APIC

D. managed object class

Correct Answer: D

managed object class is an object ; security domain is a tag

[300-620 PDF Dumps](#)

[300-620 Practice Test](#)

[300-620 Study Guide](#)