

# 300-630<sup>Q&As</sup>

Implementing Cisco Application Centric Infrastructure - Advanced (DCACIA)

# Pass Cisco 300-630 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/300-630.html


100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



### **QUESTION 1**

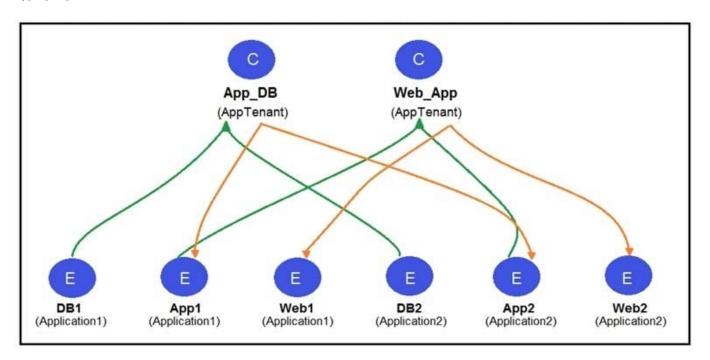

Refer to the exhibit. Two application profiles are configured in the same tenant and different VRFs. Which contract scope is configured to allow communication between the two application profiles?

A. global

B. VRF

C. application

D. tenant

Correct Answer: D

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating\_ACI/guide/b\_Cisco\_Operating\_ACI\_chapter\_01000.html

#### **QUESTION 2**

A host that is connected to a Cisco ACI fabric leaf switch sends an ARP request. Which transmission method does the ingress switch use to send the ARP requests?

A. anycast

B. broadcast

C. multicast

D. unicast



# https://www.passapply.com/300-630.html

2024 Latest passapply 300-630 PDF and VCE dumps Download

Correct Answer: D

Reference: https://www.cisco.com/c/en/us/td/docs/dcn/whitepapers/cisco-application-centric-infrastructure-design-

guide.html

#### **QUESTION 3**

What are two characteristics of Cisco ACI and Spanning Tree Protocol interaction? (Choose two.)

- A. When a TCN BPDU is received in a VLAN, Cisco ACI flushes the endpoints for the associated encapsulation.
- B. STP BPDUs are dropped due to MCP.
- C. MST BPDUs are flooded correctly in Cisco ACI fabric without additional configuration.
- D. BPDU filter and BPDU guard can be configured on Cisco ACI leaf edge ports.
- E. Cisco ACI must be configured as the STP root for all VLANs.

Correct Answer: DE

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/aci\_virtual\_edge/configuration/1-x/b\_Virtual\_Edge\_Config\_Guide\_1\_2\_2/b\_Virtual\_Edge\_Config\_Guide\_1\_2\_2\_chapter\_0101.html

## **QUESTION 4**


Which feature should be disabled on a bridge domain when a default gateway for endpoints is on an external device instead of a Cisco ACI bridge domain SVI?

- A. unicast routing
- B. ARP flooding
- C. unknown unicast flooding
- D. proxy ARP

Correct Answer: C

#### **QUESTION 5**

## https://www.passapply.com/300-630.html 2024 Latest passapply 300-630 PDF and VCE dumps Download

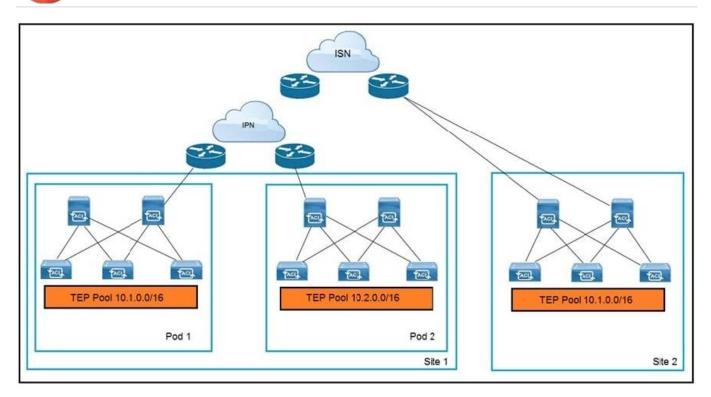

Refer to the exhibit. An engineer extends a Cisco ACI Multi-Pod setup to a Cisco ACI Multi-Site implementation. Which action allows the interconnection?

- A. Configure BIDIR-PIM in the IPN and ISN
- B. Use dedicated uplinks on Site 1 spines for ISN connections
- C. Connect all spines to the IPN and ISN
- D. Filter the advertisement of the Site 2 TEP pool into the IPN

Correct Answer: A

Latest 300-630 Dumps

300-630 VCE Dumps

300-630 Exam Questions