



# 300-815<sup>Q&As</sup>

Implementing Cisco Advanced Call Control and Mobility Services  
(CLACCM)

## Pass Cisco 300-815 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/300-815.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco  
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



## QUESTION 1

What is a description of RTP timestamps or sequence numbers?


- A. The sequence number is used to detect losses.
- B. Timestamps increase by the time "carrying" by a packet.
- C. Sequence numbers increase by four for each RTP packet transmitted.
- D. The timestamp is used to place the incoming audio and video packets in the correct timing order (playout delay compensation).

Correct Answer: D

Reference: <https://www.cs.columbia.edu/~hgs/rtp/faq.html>

## QUESTION 2

Refer to the exhibit.

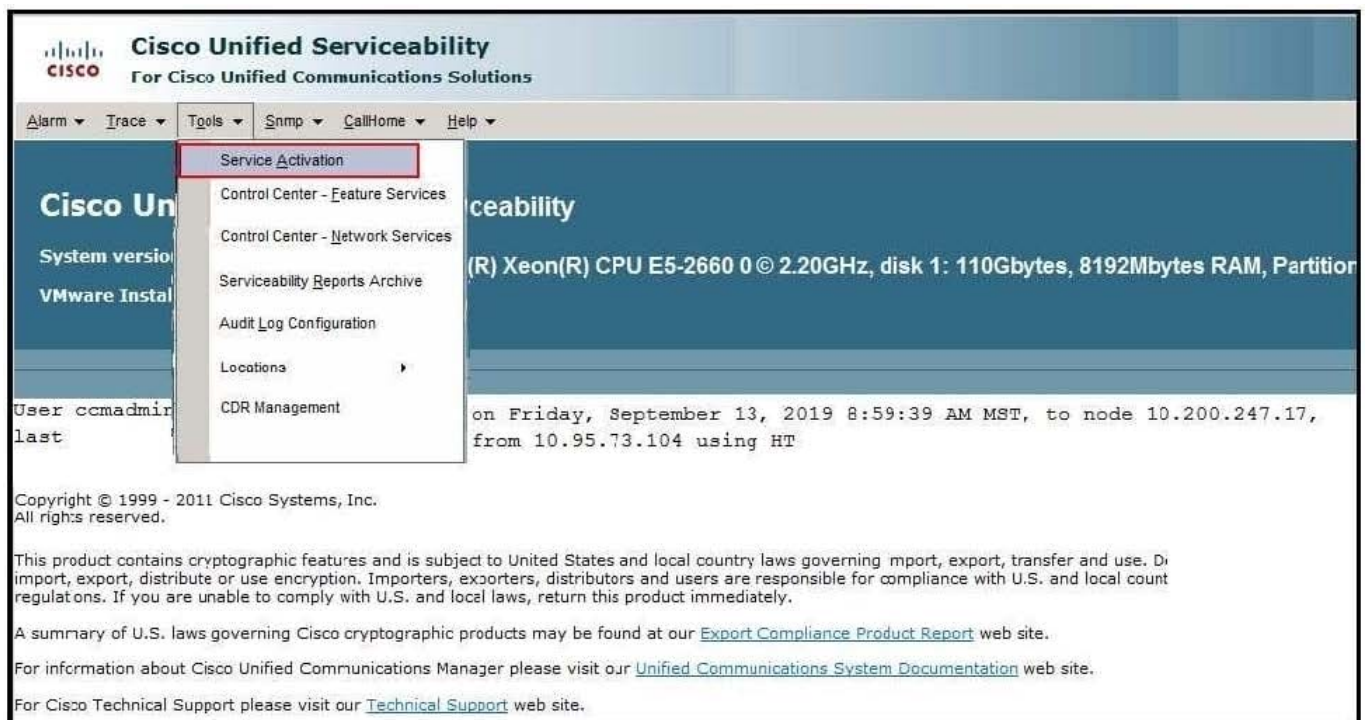

An administrator is troubleshooting a situation where a call placed from a phone registered to Cisco UCM does not complete. The administrator wants to use the Dialed Number Analyzer on Cisco UCM to check which translation pattern the call is matching. However, when logging in to Cisco Unified Serviceability, there is no option for Dialed Number Analyzer under the tool menu. Which two steps should be taken to resolve this issue? (Choose two.)

- A. Restart the subscriber.
- B. Activate the Cisco Extended Functions service.



- C. Activate the Cisco CallManager service.
- D. Activate the Cisco Dialed Number Analyzer service.
- E. Activate the Cisco Dialed Number Analyzer Server service.

Correct Answer: DE

---

### QUESTION 3

Management wants to change the initial announcements for one of the existing call hunt groups. A new set of announcement audio file was provided. Which two configuration steps must the administrator take to accomplish this change? (Choose two.)

- A. Identify the MOH audio source ID associated to one of the line group member's "Network Hold MOH Audio Source".
- B. Identify the MOH audio source ID associated to "Network Hold Source and Announcements" under the Queuing section of the hunt pilot.
- C. Identify the configured announcement names to change under the MOH audio source section, then upload the new files to the respective announcements under the Announcement section.
- D. Identify the MOH audio source ID associated to one of the line group member's "User Hold MOH Audio Source".
- E. Identify the configured announcement names to change under the Announcement section, and assign the uploaded files to the Queueing section of the hunt pilot.

Correct Answer: DE

---

### QUESTION 4

How does an engineer globalize routing for ingress calls coming from the PSTN to internal DNs?

- A. At the PSTN gateway, put the calling number in PSTN format and the called number in DN format.
- B. At Cisco Unified CM, put the calling number in E.164 format and the called number in PSTN format.
- C. At the PSTN gateway, put the calling number in E.164 format and the called number in localized (DN) format.
- D. At Cisco Unified Communications Manager, put the calling number in E.164 format and the called number in E.164 format.

Correct Answer: D

---



#### QUESTION 5

What does VoIP trace in a Cisco Unified Border Element do?

- A. It stores all call trace data in system log files for successful and failed calls.
- B. It stores all call trace data in system file logs for failed calls.
- C. It stores all call trace data in system memory for failed calls.
- D. It stores all call trace data in system memory for successful and failed calls.

Correct Answer: D

[300-815 VCE Dumps](#)

[300-815 Practice Test](#)

[300-815 Study Guide](#)