



# 300-915<sup>Q&As</sup>

Developing Solutions using Cisco IoT and Edge Platforms (DEVIOT)

## Pass Cisco 300-915 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/300-915.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco  
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers





### QUESTION 1


After an application is deployed, potential issues arise around connectivity. As part of the troubleshooting process, the IP address must be determined to ensure end-to-end communication.

Which method provides the required details using the Cisco IOx CLI?

- A. ioxclient application status
- B. ioxclient application metrics
- C. ioxclient application getconfig
- D. ioxclient application info

Correct Answer: D

### QUESTION 2

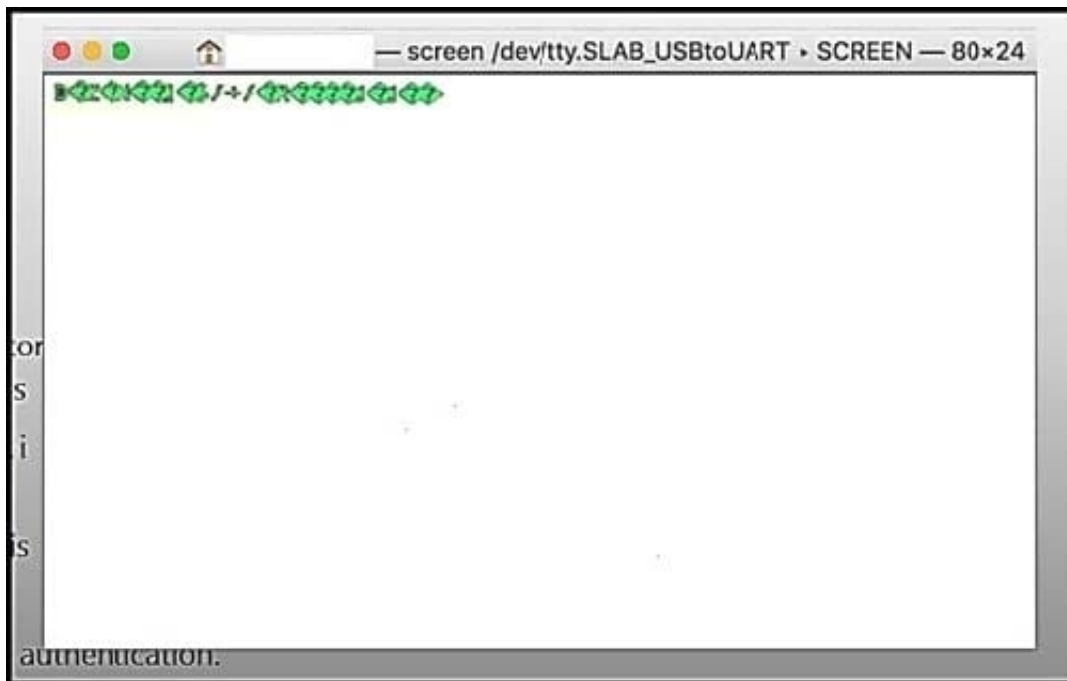

Refer to the exhibit. When a laptop is connected to a device via a serial connection, which action makes the output readable?

- A. Change the baudrate in the connection settings.
- B. Reboot the device in case a firmware error is the issue.
- C. Change the power level of the device.
- D. Change the unicode settings to UTF-8.



Correct Answer: A

---

### QUESTION 3

Mosquitto was installed correctly on the Cisco IR829 router as a Cisco IOx application. When the sensor is connected to the broker on the Cisco IR829 router with the default port, the connection is refused (Error Code 5).

Which action should be done to resolve the issue?

- A. Insert in the IOS config: `ip nat inside source static tcp 1883 interface GigabitEthernet0 1883`
- B. Insert in the package\_config.ini file under section ports: `tcp: ["8883"]`
- C. Use the correct username and password.
- D. Insert in the package.yaml file under section ports: `tcp: ["1883"]`

Correct Answer: C

---

### QUESTION 4

Which two states are applications expected to be seen in when they are managed on Cisco IOx? (Choose two.)

- A. DEACTIVATED
- B. ACTIVATED
- C. ALLOWED
- D. STOPPED
- E. VALIDATED

Correct Answer: BD

---

### QUESTION 5



```
import requests
import time

api_token = "ddd906922b8581e3.VoNzzzNgsYmKIgjg5AEPxGe-nNFZnJzn9n_Wv_-gAHY"
organization_id = 900
api_url_base = "https://eu.ciscokinetiic.io/api/v2/"
headers = {"Content-Type": "application/json",
           "Authorization": "Token {}".format(api_token)}

r = requests.get(api_url_base+"organizations/{}/gate_ways".format(organization_id), headers=headers)

if r.status_code == requests.codes.ok:
    output = r.json()
else:
    print("Errorr {}, Message: {}".format(r.status_code, r.content))
```

```
Error 401. Message: b'{"error_code":"invalid_api_token","errors":["Invalid API token, authentication failure."}]'
```

Refer to the exhibit. The code and the error message that are received when the code is run is presented.

What causes issues authenticating with Cisco GMM API using the web-generated API key?

- A. firewall that blocks authentication ports
- B. incorrect username and password
- C. incorrect GMM Cluster selection
- D. incorrect key size and data encryption

Correct Answer: B

[Latest 300-915 Dumps](#)

[300-915 Exam Questions](#)

[300-915 Braindumps](#)