

350-080^{Q&As}

CCIE Data Center Written

Pass Cisco 350-080 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.passapply.com/350-080.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



https://www.passapply.com/350-080.html

2021 Latest passapply 350-080 PDF and VCE dumps Download

QUESTION 1

Drag and drop the correct port security configuration on the left to the correct action on the right.


Select and Place:





QUESTION 2

Select and Place:

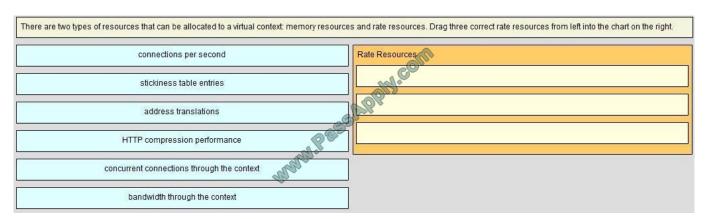

Correct Answer:


https://www.passapply.com/350-080.html

2021 Latest passapply 350-080 PDF and VCE dumps Download

	Rate Re	sources
stickiness table entries		bandwidth through the context
address translations		HTTP compression performance
	08	connections per second
concurrent connections through the context	mertal.	

QUESTION 3

Refer to the exhibit.

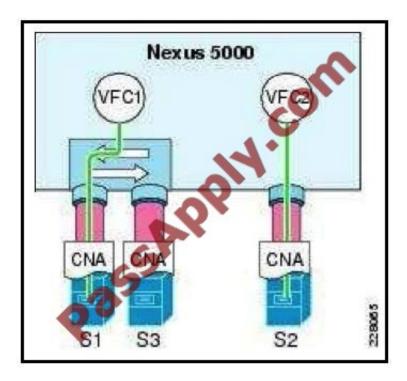

The servers in this network are connected to an A-B SAN design. What is required for hosts to support a high-availability Fibre Channel connection to a storage controller?

- A. Multipath drivers should be installed on all the servers.
- B. Multipath drivers should be installed on the CNA of S1 and S3.
- C. High availability for Fibre Channel is controlled by the storage controller, and there is no need to add or make changes on the server side.
- D. S1 and S3 require that multipath drivers are installed, but S2 does not.
- E. Multipath drivers should be installed on all CNAs of all servers.



https://www.passapply.com/350-080.html

2021 Latest passapply 350-080 PDF and VCE dumps Download

Correct Answer: A

QUESTION 4

Which three statements best describe multicast operation on Cisco Nexus switches in a data center? (Choose three.)

- A. Cisco NX-OS Software does not support PIM dense mode.
- B. The command ip multicast-routing must be enabled in Cisco NX-OS Software before any multicast configuration is possible on the switch.
- C. PIM CLI configuration and verification commands are not available until you enable the PIM feature with the feature pim command.
- D. Cisco NX-OS Software supports multicast routing per Layer 3 VRF instance.
- E. The default PIM operational mode on the Cisco Nexus 7000 switch is SSM.

Correct Answer: ACD

QUESTION 5

Refer to the exhibit.

configure terminal vlan 100 interface vlan 100 ip address 10.10.100.1/24 no shutdown

The interface remains in a down state after entering the command that is shown in the exhibit. What is the cause of the problem?

- A. The feature interface-vlan command must be configured.
- B. The VDC contains only F1 interfaces.
- C. There are IP address conflicts.
- D. The VDC is "type OTV."
- E. The command copy run start was not entered.

Correct Answer: B

Latest 350-080 Dumps

350-080 VCE Dumps

350-080 Braindumps



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.passapply.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © passapply, All Rights Reserved.