350-601 Q&As

Implementing and Operating Cisco Data Center Core Technologies (DCCOR)

Pass Cisco 350-601 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/350-601.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase
100% Money Back Guarantee
365 Days Free Update
800,000+ Satisfied Customers

QUESTION 1

Refer to the exhibit.

```
Start time: Mon Apr 15 09:23:01 2019
Last election time: Mon Apr 15 09:24:24 2019
A: UP, PRIMARY
B: UP, SUBORDINATE
A: memb state UP, lead state PRIMARY, mgmt services state: UP
B: memb state UP, lead state SUBORDINATE, mgmt services state: UP
heartbeat state PRIMARY_OK
INTERNAL NETWORK INTERFACES:
eth1, UP
eth2, UP
HA NOT READY
No device connected to this Fabric Interconnect
```

What be connected to clear the HA NOT READY status?

A. server chassis

B. network uplinks

C. management ports

D. Layer 1-Layer 2 ports

Correct Answer: A

QUESTION 2

An engineer is implementing a Cisco ACI fabric and must use static VLAN range as part of a VMM deployment. The static VLAN must be incorporated into the dynamic VLAN pool. The existing VLAN pool is set for dynamic allocation. Which action accomplishes this goal?

A. Add the VLAN to the pool configured with Inherit Allocation Mode from parent.

B. Change the existing VLAN pool to static allocation mode.

C. Add a static VLAN allocation range to the VLAN pool.

D. Create a static reservation within the dynamic VLAN pool.

Correct Answer: C

QUESTION 3

Refer to the exhibit.

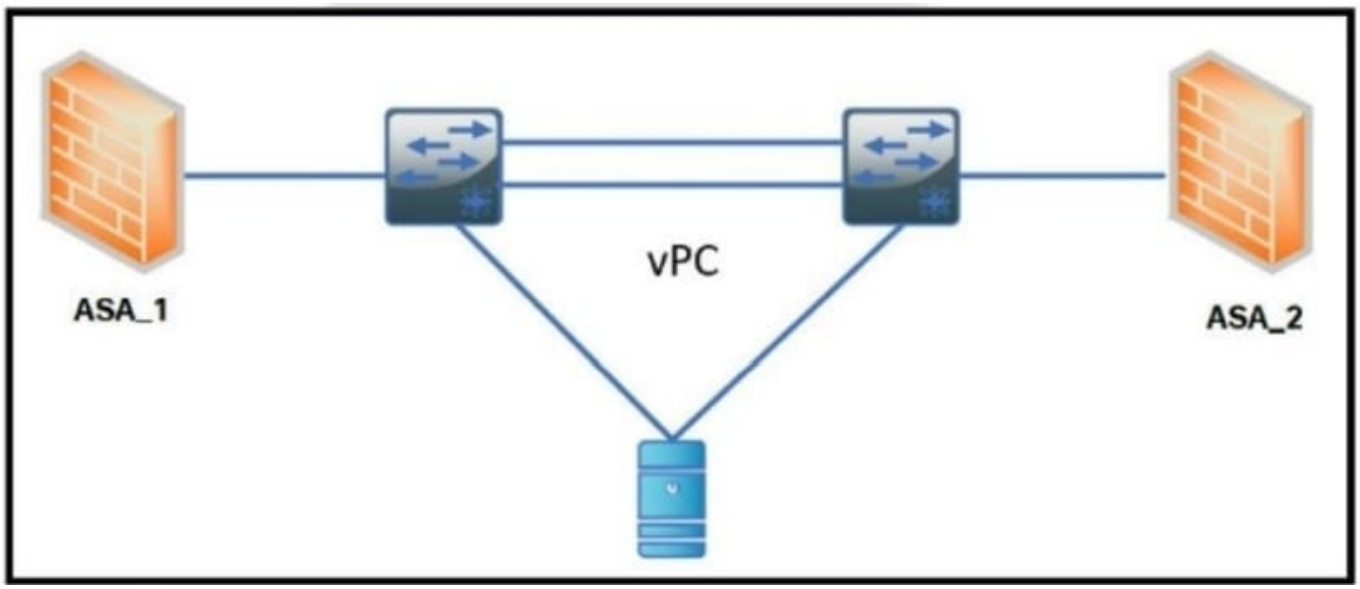

The ASA 1 acts as a Layer 3 gateway for all servers. The servers lose the gateway connectivity when the vPC peer links go down and the vPC keepalive remains up. Which action improves the high availability in the network?

A. Create a static port channel with two links from each firewall to the switch

B. Activate the vPC orphan-port suspend feature on the switch ports connected to the firewall

C. Implement the IP reoVect feature on the vPC devices

D. Enable the vPC peer gateway feature on the vPC devices

Correct Answer: D

QUESTION 4

Which configuration statically assigns VSAN membership to a virtual Fibre Channel interface?

A. switch(config-vsan-cb>># vsan 100 bind interface fc 3/1

B. switch# vsan 100 fc 3/1

D. switch(config-vsan-db)# vsan 100 interface vfc 31

Correct Answer: D

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus5000/sw/configuration/guide/cli/CLIConfigurationGuide/vsan.html

QUESTION 5

An engineer must export the Cisco UCS Manager configuration for backup purposes. The requirement is to export the

configuration that contains the AAA and RBAC configuration Also the file must be stored a human-readable format. Much backup type must be selected to meet these requirements?

A. logical configuration

B. system configuration

C. fun state

D. all configuration

Correct Answer: B

Latest 350-601 Dumps 350-601 VCE Dumps 350-601 Braindumps