



350-601^{Q&As}

Implementing and Operating Cisco Data Center Core Technologies
(DCCOR)

Pass Cisco 350-601 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/350-601.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

An engineer is configuring AAA authentication on an MDS 9000 switch. The LDAP server is located under the IP 10.10.2.2. The data sent to the LDAP server should be encrypted. Which command should be used to meet these requirements?

- A. Idap-server host 10.10.2.2 enable-ssl
- B. Idap-server 10.10.2.2 port 443
- C. Idap server host 10.10.2.2 key SSL_KEY
- D. Idap-server 10.10.2.2 key SSL_KEY

Correct Answer: A

Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/mds9000/sw/6_2/configuration/guides/security/nx-os/sec_cli_6-x/cradtac1.html

QUESTION 2

An engineer must design an automation solution for the Cisco ACI Fabric to speed up the deployment of logical network elements for tenant provisioning. When creating a solution, the engineer must keep in mind that the tool must support these requirements:

1.
Allow the rapid creation and removal of logical containers.
2.
Support the creation of custom modules and data structures.
3.
Be extensible with external libraries and modules.
- 4.

Allow rapid testing of code using an on-demand execution environment. Which automation tool meets these requirements?


- A. SaltStack
- B. YAML
- C. Chef
- D. Python

Correct Answer: C



QUESTION 3

Refer to the exhibit.

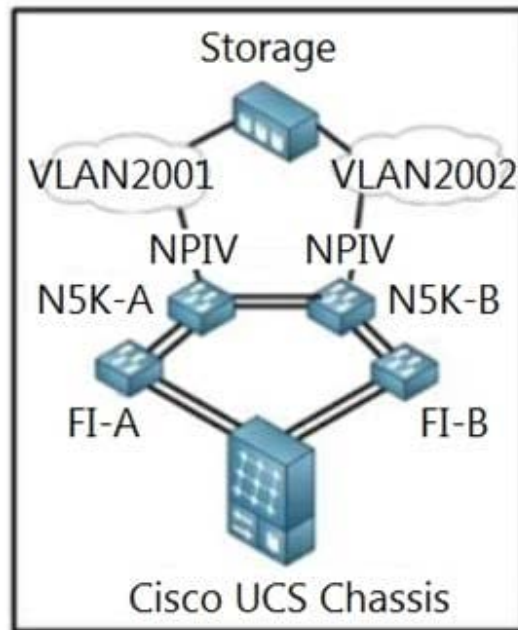

Create VSAN

Name:

FC Zoning Settings

FC Zoning: Disabled Enabled

Do **NOT** enable local zoning if fabric interconnect is connected to an upstream FC/FCoE switch.

Common/Global Fabric A Fabric B Both Fabrics Configured Differently

You are creating a global VSAN that maps to the same VSAN ID in all available fabrics.

A VLAN can be used to carry FCoE traffic and can be mapped to this VSAN.

Enter the VSAN ID that maps to this VSAN.

Enter the VLAN ID that maps to this VSAN.

VSAN ID: FCoE VLAN:



An engineer is configuring a VSAN on the network. Which option must be selected to create the VSAN?

- A. Fabric B
- B. FC Zoning Enabled
- C. Fabric A
- D. Common/Global

Correct Answer: C

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/mds9000/sw/nx-os/configuration/guides/fabric/fabric_fm_4_2_published/fm_fabric/vsan.html https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-central/GUI-User-Guides/Storage-Mgmt/1-5/b_CiscoUCSCentral_Storage_Management_Guide_1-5/b_CiscoUCSCentral_Storage_Management_Guide_1-5_chapter_011.pdf

QUESTION 4

An engineer must implement a new VRF that permits communication between all endpoint groups (EPGs) by default. The new EPGs and bridge domains (BDs) that are created in the new VRF must not require additional configuration to permit traffic between the newly created EPGs or BDs.

Which action accomplishes this goal?

- A. Provide and consume a permit any contract on the VRF level
- B. Create a VRF in the common tenant.
- C. Place all EPGs in the preferred group.
- D. Implement a global contract.

Correct Answer: A

<https://sdncore.com/aci-contracts-basics/#:~:text=of%20this%20post,-,contract%20subject%20and%20scope,-The%20contract%20may>

QUESTION 5

An engineer must use the Embedded Event Manager to monitor events that occur on a Cisco Nexus 9000 Series Switch. An environment variable needs to be created so that several policies use the monitored events in their actions. The external email server is represented by IP address 10.10.10.10. Which command sets the environment variable?

- A. n9k2# event manager environment mailserv "10.10.10.10"
- B. n9k2(config)# event manager environment mailserv "10.10.10.10"
- C. n9k2(config-applet)# environment mailserv "10.10.10.10"
- D. n9k2(config)# event manager policy environment mailserv "10.10.10.10"

Correct Answer: B



To set an Embedded Event Manager (EEM) environment variable, use the event manager environment command in global configuration mode. To disable an EEM environment variable, use the no form of this command.

<https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/eem/command/eem-cr-book/eem-cr-e1.html>

[Latest 350-601 Dumps](#)

[350-601 Exam Questions](#)

[350-601 Braindumps](#)