



CCIE Data Center Written

Pass Cisco 351-080 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/351-080.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

😳 365 Days Free Update

800,000+ Satisfied Customers





QUESTION 1


On the Cisco Nexus 7000 Series Switch, Control Plane Policing is enforced on which component?

- A. The supervisor module enforces CoPP before out-of-policy traffic reaches the CPU
- B. The fabric modules enforce CoPP in the fabric before out-of-policy traffic reaches the CPU
- C. The linecards enforce CoPP locally before out-of-policy traffic reaches the CPU
- D. The egress virtual output queue enforces CoPP locally before out-of-policy traffic reaches the CPU

Correct Answer: C

QUESTION 2

Refer to the exhibit.

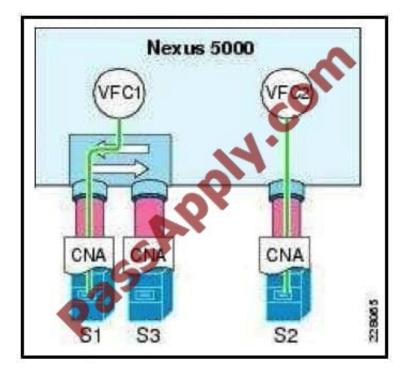

The servers in this network are connected to an A-B SAN design. What is required for hosts to support a high-availability Fibre Channel connection to a storage controller?

A. Multipath drivers should be installed on all the servers.

B. Multipath drivers should be installed on the CNA of S1 and S3.

C. High availability for Fibre Channel is controlled by the storage controller, and there is no need to add or make changes on the server side.

D. S1 and S3 require that multipath drivers are installed, but S2 does not.



E. Multipath drivers should be installed on all CNAs of all servers.

Correct Answer: A

QUESTION 3

What does the command "IP ARP synchronize" do in a vPC configuration?

- A. Synchronizes ARP entries between vPC peers every five minutes
- B. Triggers a manual update of ARP entries from the primary peer to the secondary
- C. Enables a bulk loading of ARP entries when a vPC peer is restored
- D. Uses the peer-keepalive link to maintain ARP table consistency

Correct Answer: C

QUESTION 4

Refer to the exhibit.

Legend: ULAN	* - primary entry, aye - seconds since MAC Address		+ - pri	mary entr	y a	MAC, O - Overlay MAC sing vPC Peer-Link Y Ports
- 501	0025.b500.001d	dynamic			F	Veth9856
- 581	8825, 5588, 8835	dynamic	10	P	17	Eth5/1/6
- 501	0025.b500.003c	dynamic	470	F	17	Veth9578
* 205	0025.b500.005c	static	R	F	F	Veth2607
* 78	0025, 5500, 006d	static	888	F	6 B B B B B B	Ueth2107
- 78	0025, b500, 008d	static	8	F	F	Veth1668
- 60	0050.56a5.361e	dynamic	8	F	F	Eth1/1/4
+ 60	0050.56a5.3d91	dynamic	6	F	F	Eth1/1/4
# 68	0050.56a5.53c3	dynamic	38	F	P	Eth1/1/4
- 21	0002.3d80.0f0d	dynamic	0	F	F	Eth5/1/6
- 6	0050.56a5.3a1d	dynamic	30	F	F	Eth1/1/4
- 6	0050.56a5.6568	dynamic	30	F	F	Eth1/1/4
# 6	0050.56a5.78c5	dynamic	30	F	F	Eth1/1/4
= 6	269d.bf48.49e8	dynamic	750	F	F	Veth32772
- 6	5254.00be.5ebc	otatic	8	P	F	Veth32772
* 5	0002.3d20.0f0d	dynamic	1.0	F	F	Eth5/1/6
	8882.3d48.8f8d	dynamic	18	и и и и и и и и и и и и и	F	Eth5/1/6
• 3	0050.5676.fdif	dynamic	10	F	F	Eth5/1/6
• 3	0050.5679.e949	dynamic	8		F	Veth2595
• 3	0050.569d.0001	dynamic	68	F	F	Veth2595

Output of "show mac address-table" on Fabric Interconnect A

Fabric Interconnect A, operating in end-host mode, receives an ingress frame with source MAC address 0025.b500.0035 on uplink Eth1/19.

Which statements are true? (Choose two.)

A. The frame will be accepted. Fabric Interconnect A will update its MAC address table to show that 0025.b500.0035 is dynamically learned on Eth1/19 and no longer dynamically learned on Eth5/1/6.

B. Fabric Interconnect A will transmit a Gratuitous ARP for 0025.b500.0035 since it has moved ports, and the upstream network needs to be notified of the new location.



- C. Fabric Interconnect A will drop the frame.
- D. The MAC address table will not be updated as a result of receiving this frame on an uplink.
- E. Reverse Path Forwarding will determine whether or not this frame is dropped by Fabric Interconnect A.
- F. Deja vu will determine whether or not this frame is dropped by Fabric Interconnect A.

Correct Answer: CD

QUESTION 5

Select and Place:

Drag four actions from left that can be performed by the Server Configuration Utility for the C	Disco UCS C-Series and drop them on the list on right.
Perform offline diagnostics.	Performed by SCH
Add or remove vNICs and vHBAs.	
Install the latest operating system drivers	
Configure iSCSI toot parameters.	
Assisted operating system install.	
Update platform firmware.	

Correct Answer:

	Performed by SCU
Add or remove vNICs and vHBAs.	Perform offline diagnostics.
	Configure iSCSI boot parameters.
	Assisted operating system install.
	Install the latest operating system drivers.

351-080 PDF Dumps

351-080 Practice Test

351-080 Braindumps



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.passapply.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:



One Year Free Update



Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.



Money Back Guarantee

To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.



Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.

Any charges made through this site will appear as Global Simulators Limited. All trademarks are the property of their respective owners. Copyright © passapply, All Rights Reserved.