



352-011^{Q&As}

Cisco Certified Design Expert Practical

Pass Cisco 352-011 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/352-011.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center


- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibit

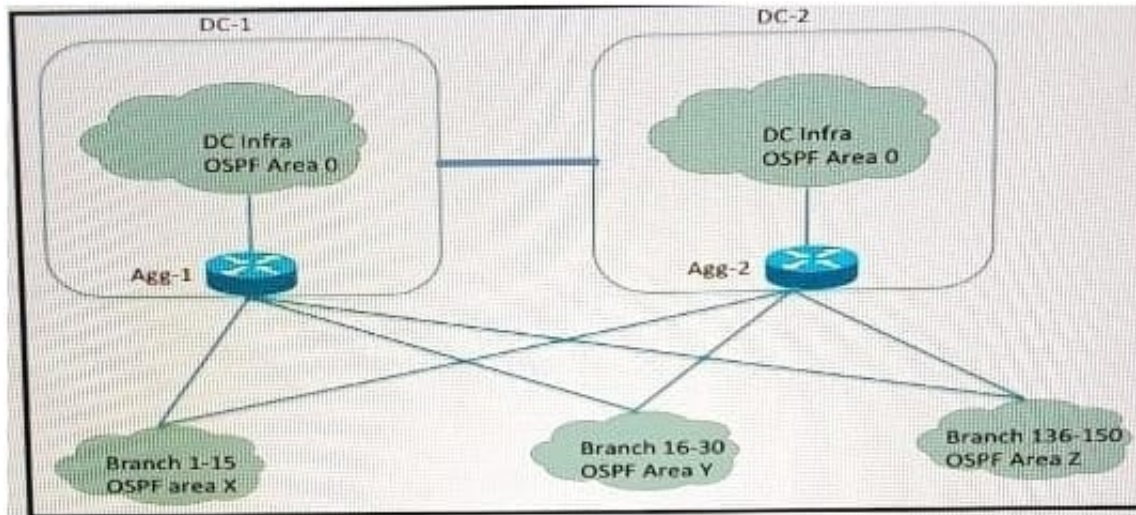

company xyz has 150 branch location across the U.S. Each branch is connected to two aggregation router one router in each data center The network is configured with Multiple OSPF with multiple OSPF areas and the aggregation router are ABRs A requirement is to keep an optimal path to the data centers and at the same time reduce the LSA propagation and SPF recomputation during a change in any part of the network

Which design elements should be included on the aggregation router?

- A. OSPF NSSA
- B. distribute lists
- C. OSPF summarization
- D. OSPF totally stubby area

Correct Answer: C

QUESTION 2

In which two ways is a network design improved by including IP Event Dampening? (Choose two)

- A. Provides sub-second convergence
- B. Quickly detects network failures
- C. Prevent routing loops
- D. Improves network stability
- E. Reduces processing load



Correct Answer: DE

QUESTION 3

Which technology , implemented on aggregation -edge nodes at the aggregation layer, provides per -tenant isolation at Layer 3 , with separate dedicated per-tenant routing and forwarding tables on the inside interfaces of firewall contexts?

- A. VDC
- B. VLAN
- C. VXLAN
- D. VRF-lite

Correct Answer: D

QUESTION 4

You are reviewing a new data center design for a customer. They chose to leverage a tunnel-based overlay technology for quick deployment and multitenant security. Which design concern can affect the availability across the data center?

- A. Nonoverlapping IP address space between the overlay networks
- B. MTU size on the underlay links
- C. Review of common paths on the underlay links
- D. Paper placement of STP root bridge in overlay networks

Correct Answer: B

QUESTION 5

Which two conditions must be met for EIGRP to maintain an alternate loop-free path to a remote network? (Choose two)

- A. The Reported Distance from a successor is lower than the local Feasible Distance
- B. The Reported Distance from a successor is higher than the local Feasible Distance
- C. A feasible successor must be present
- D. The feasible Distance from a successor is lower than the local Reported Distance
- E. The feasibility condition do not need to be met

Correct Answer: AC



VCE & PDF

PassApply.com

<https://www.passapply.com/352-011.html>

2024 Latest passapply 352-011 PDF and VCE dumps Download

[352-011 Practice Test](#)

[352-011 Exam Questions](#)

[352-011 Braindumps](#)