



3605^{Q&As}

Avaya Ethernet Routing Switch Implementation and Maintenance Exam

Pass Avaya 3605 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/3605.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Avaya
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

A technician is adding the Virtual Link Aggregation Control Protocol (VLACP) configuration ID a Converged Campus Solution where all Ethernet Routing switches

(ERSs) are directly connected without intermediary WAN transport devices.

What are two key configuration tasks? (Choose two)

- A. configure all links to use the default multicast MAC address for VLACP messages
- B. For the 1ST links, configure the long timeout value
- C. For the SMLT links, configure the long timeout value
- D. Configure all links to use a unique reserved multicast MAC address for VLACP messages

Correct Answer: BD

QUESTION 2

A technician is configuring an InterSwitch Frank (IST) for Spilt Multi-Link Franking (SMLT). Which statement about how the IST is addressed is true?

- A. Configure the IP address of the ports that comprise the IST.
- B. No address configurations are required when configuring an IST.
- C. Configure the IP address of the VLAN that was created for the IST.
- D. Configure the MAC addresses of the switches on each end of the IST.

Correct Answer: C

QUESTION 3

Which types of topologies are supported in the implementation of the Avaya Enterprise Fabric? (Choose three)

- A. SPB Layer 2 VSN
- B. SPB GRT shortcuts
- C. SPB GRT 3 VSN
- D. SPBv VSN

Correct Answer: ABD

QUESTION 4




Traceroute allows a route to be traced to a network using an Ethernet Routing Switch (ERS) 8600 CLI command. How could you use it to limit the number of hops the traceroute reports?

- A. Configure the P (base UDP port) to the number of maximum number hops.
- B. Configure the q (number of probes per TTL) to the number maximum number of hops.
- C. Configure the m (maximum TTL value) to the number of maximum number of hops.
- D. Configure the w (wait time per probe) to the number of maximum number of hops.

Correct Answer: C

QUESTION 5

Refer to the exhibit.

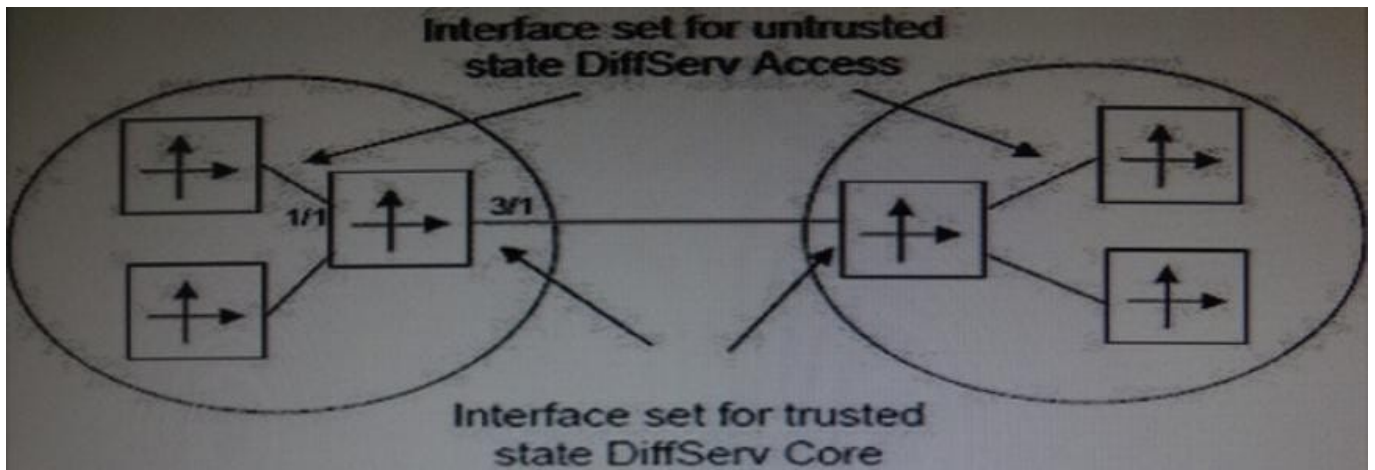

Which commands will configure the labeled Ethernet ports shown in the exhibit correctly?

- A. config ethernet 3/1 enable-diffserv trueconfig ethernet 1/1 access-diffserv true
- B. config ethernet 1/1 access-diffserv trueconfig ethernet 1/1 access-diffserv true
- C. config ethernet 1/1, 3/1 enable-diffserv trueconfig ethernet 1/1 access-diffserv true
- D. config ethernet 1/1, 3/1 enable-diffserv trueconfig ethernet 3/1 access-diffserv true

Correct Answer: C

[Latest 3605 Dumps](#)

[3605 Practice Test](#)

[3605 Braindumps](#)