



# 4A0-101<sup>Q&As</sup>

Alcatel-Lucent Interior Routing Protocols and High Availability

## Pass Alcatel-Lucent 4A0-101 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/4a0-101.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





#### QUESTION 1

What is the default preference value for a static route in the Alcatel-Lucent 7750 SR router?

- A. 0
- B. 5
- C. 10
- D. 15

Correct Answer: B

---

#### QUESTION 2

In an OSPF Hello packet, which of the following fields must match for all neighbor routers on the segment? Choose three answers.

- A. Area ID W B.
- B. Hello and Dead intervals PC.
- C. Stub flag
- D. Checksum values
- E. The list of neighbors

Correct Answer: ABC

---

#### QUESTION 3

The solicited node address for the destination node address of 2001:DB8::30A:216 4DFF:FE14:6CAE is:


- A. 2001::FF:FE:14:6CAE
- B. 2001::1:FF:14:6CAE
- C. FF02.DB8::30A:216:4DFF:FE14.6CAE
- D. FF02::1:FF14:6CAE

Correct Answer: D

---

#### QUESTION 4

Click on the exhibit.

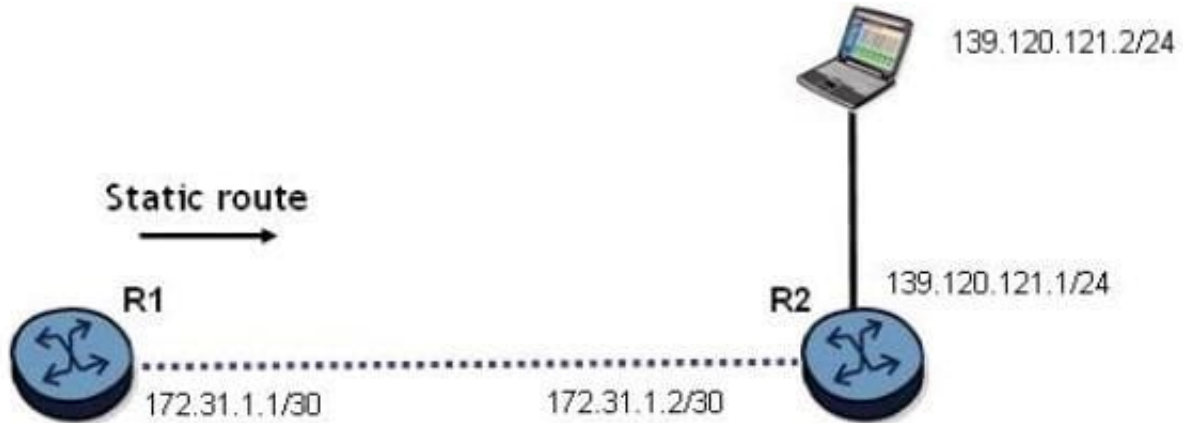

```
*R01>config>router# static-route 139.120.121.0/24 next-hop 172.31.1.1
*R01>config>router# ping 139.120.121.2 source 172.31.1.1
PING 139.120.121.2 56 data bytes
No route to destination. Address: 139.120.121.2, Router: Base
No route to destination. Address: 139.120.121.2, Router: Base
No route to destination. Address: 139.120.121.2, Router: Base
No route to destination. Address: 139.120.121.2, Router: Base
No route to destination. Address: 139.120.121.2, Router: Base

---- 139.120.121.2 PING Statistics ----
5 packets transmitted, 0 packets received, 100% packet loss
```

A static route has been configured on router R1 to reach the PC at 139.120.121.2. What might be causing the ping to fail?

- A. Router R2 needs a static route to the PC.
- B. Router R2 needs a default to router R1.
- C. Router R1 needs a default route to router R2.
- D. The static route should use a next-hop of 172.31.1.2

Correct Answer: D

### QUESTION 5

What is the metric and maximum routable value for RIP?

- A. Hop count and 16
- B. Hop count and 15
- C. Link cost and 15
- D. Link cost and 16

Correct Answer: B



VCE & PDF

PassApply.com

<https://www.passapply.com/4a0-101.html>

2024 Latest passapply 4A0-101 PDF and VCE dumps Download

---

[Latest 4A0-101 Dumps](#)

[4A0-101 Practice Test](#)

[4A0-101 Study Guide](#)