4A0-103^{Q&As}

Alcatel-Lucent Multiprotocol Label Switching

Pass Alcatel-Lucent 4A0-103 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/4a0-103.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

Which of the following about IS-IS Traffic Engineering on an Alcatel-Lucent 7750 SR is FALSE?

A. Traffic engineering information is carried in the extended TLVs.

B. Traffic engineering must be enabled on all IP/MPLS routers along the LSP path.

C. Traffic engineering information is stored in the opaque database,

D. Traffic engineering is required for constraint-based LSPs.

Correct Answer: C

QUESTION 2

Which of the following routing protocols are supported on the Alcatel-Lucent 7750 SR to enable constraint-based LSPs? (Choose two)
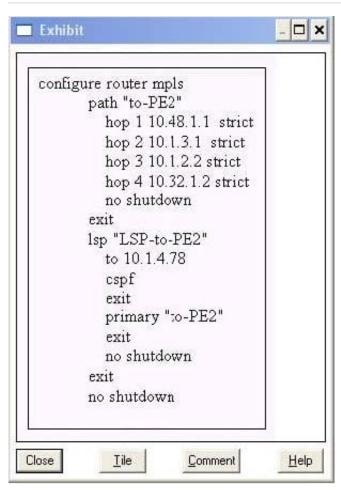
A. RIPv2-TE

B. CSPF

C. OSPF-TE

D. ISIS-TE

E. RSVP-TE

Correct Answer: CD

QUESTION 3

Click on the exhibit button below.

```
Exhibit                                          _ □ ×

configure router mpls
        path "to-PE2"
            hop 1 10.48.1.1  strict
            hop 2 10.1.3.1  strict
            hop 3 10.1.2.2 strict
            hop 4 10.32.1.2 strict
            no shutdown
        exit
        lsp "LSP-to-PE2"
            to 10.1.4.78
            cspf
            exit
            primary ":o-PE2"
            exit
            no shutdown
        exit
        no shutdown


Close        Tile        Comment        Help
```

Given the configuration below, which of the following commands would enable fast reroute on the LSP? Choose two answers

A. This configuration already is configured for FRR.

B. fast-reroute facility

C. fast-reroute one-to-one

D. secondary

E. standby

Correct Answer: BC

QUESTION 4

An LSP is configured with a fully loose path and CSPF is not enabled. An LSR receives the first PATH message for this LSP. Which of the following is NOT performed by the LSR?

A. The LSR regenerates and forwards a new PATH message.

B. The LSR stores the PATH message in the PSB.

C. The LSR forwards the PATH message based on the HOP object in the RSB.

D. The LSR looks up the PATH message\\'s destination IP address in the FIB.

Correct Answer: C

QUESTION 5

Which of the following about T-LDP on the Alcatel-Lucent 7750 SR is FALSE?

A. T-LDP is used to provide an end-to-end session between two PE routers.

B. T-LDP is used to signal service labels for Layer 2 services.

C. T-LDP is used to establish transport tunnels for Layer 2 services.

D. T-LDP is used in LDP over RSVP solution.

Correct Answer: C

[Latest 4A0-103 Dumps](link)   [4A0-103 VCE Dumps](link)   [4A0-103 Braindumps](link)