



# 4A0-106<sup>Q&As</sup>

Alcatel-Lucent Virtual Private Routed Networks

## Pass Alcatel-Lucent 4A0-106 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/4a0-106.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

Which command may be used on an Alcatel-Lucent 7750 SR to verify the number of VRF routes allowed, based on the maximum routes value configured in the service instance?

- A. Show service id base
- B. Show router bgp routes
- C. Show service id maximum-routes
- D. Show router status

Correct Answer: A

### QUESTION 2


Which of the following about Carrier Supporting Carrier (CSC) VPRN is FALSE?

- A. CSC eliminates the need for customer carriers to build and maintain their own MPLS backbone.
- B. CSC is also known as carrier's carrier or carrier serving carrier.
- C. The customer carrier provides VPN or Internet services to its end-customers.
- D. A CSC VPRN is configured on the customer carrier's CSC-CE routers.

Correct Answer: D

### QUESTION 3

Click the exhibit.

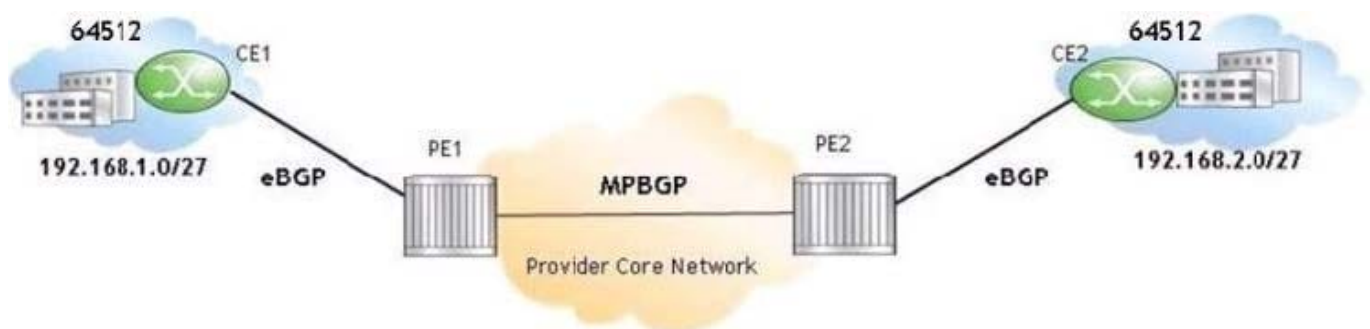

The AS-path nullification method is used to prevent CE2 from discarding routes received from CE1. On which router should the AS-path nullification policy be configured?

- A. CE1
- B. PE2



C. PE1

D. CE2

Correct Answer: C

#### QUESTION 4

When configuring a VPRN service on an Alcatel-Lucent 7750 SR, where should the following policy be applied?

```
A:PE1# show router 10 ospf neighbor

=====
OSPF Neighbors
=====
Interface-Name          Rtr Id          State          Pri  RetxQ  TTL
-----
toCE1-VPRN              10.10.10.241    ExchStart      1    0      36
-----
No. of Neighbors: 1
=====
```

- A. On the CE under the RIP context
- B. On the PE under the BGP context
- C. On the PE under the RIP context
- D. On the CE under the BGP context
- E. This policy is not required

Correct Answer: E

#### QUESTION 5

Which of the following about inter-AS model B VPRN is FALSE?

- A. Model B does not require the configuration of VPRN instances on ASBRs.
- B. The ASBRs peer with each other to transport VPN-IPv4 routes between autonomous systems.
- C. PE routers distribute VPN-IPv4 routes to their local ASBR.
- D. One single ASBR is required in each AS to hold the routes for all VPRNs.

Correct Answer: D