VCE & PDF
https://www.passapply.com
passapply.com

600-660^{Q&As}

Implementing Cisco Application Centric Infrastructure - Advanced

Pass Cisco 600-660 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/600-660.html

100% Passing Guarantee
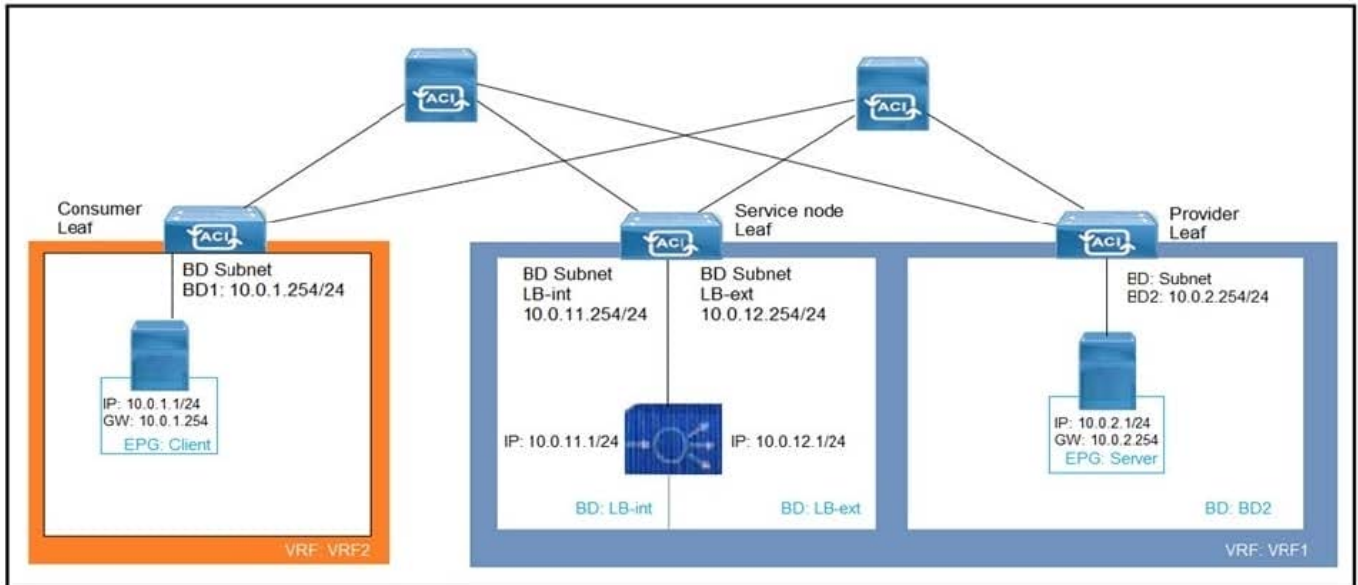## 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

Refer to the exhibit. What must be configured to allow the PBR node (LB-int) to monitor the availability of the endpoint that is in the EPG server?

A. Endpoint Dataplane Learning

B. Unicast Route disabled for client and server bridge domains

C. PBR node tracking

D. Direct Connect in the service graph template

Correct Answer: A

QUESTION 2

Cisco ACI fabric is migrated from network-centric mode to application-centric mode. What is possible in an application-centric design?

A. remapping of VLAN pools

B. migration of bare metal servers to virtual machines

C. creation of additional EPGs under one bridge domain

D. Cisco ACI VMM integration with hypervisors

Correct Answer: C

QUESTION 3

An organization expands a Cisco ACI Multi-Pod from two to six pods and must ensure that the control plane scales. What should be configured in the IPN to ensure that BUM traffic is forwarded efficiently across the IPN?

A. spine headend replication

B. BIDIR-PIM

C. MP-BGP

D. MSDP

Correct Answer: B

Reference: https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-737855.html

QUESTION 4

Refer to the exhibit. Which combination of flags in the Cisco ACI contract allows a client in WebClient EPG to establish an HTTP connection toward a server in WebServer EPG?

A. Apply Both Direction ENABLED and Reverse Port Filter ENABLED

B. Apply Both Direction DISABLED and Reverse Port Filter DISABLED

C. Apply Both Direction DISABLED and Reverse Port Filter ENABLED

D. Apply Both Direction ENABLED and Reverse Port Filter DISABLED

Correct Answer: C

QUESTION 5
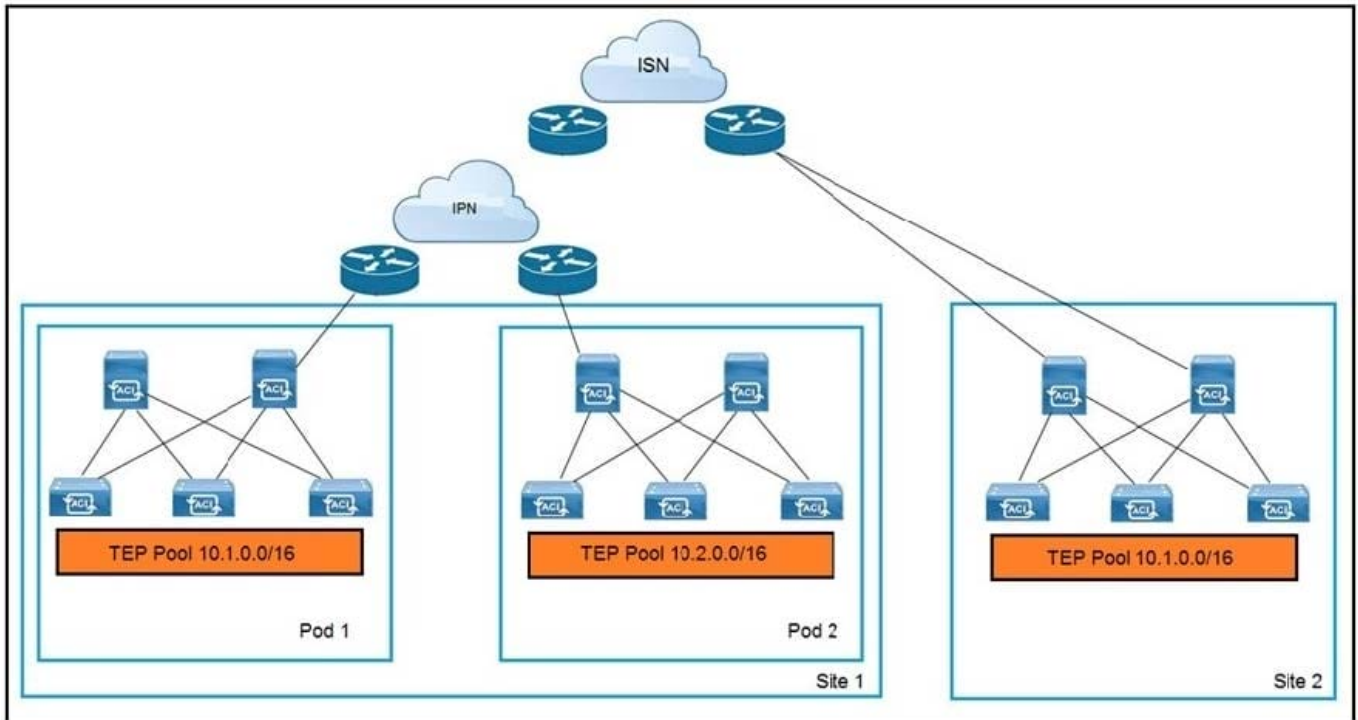
Refer to the exhibit. An engineer extends a Cisco ACI Multi-Pod setup to a Cisco ACI Multi-Site implementation. Which action allows the interconnection?

A. Configure BIDIR-PIM in the IPN and ISN

B. Use dedicated uplinks on Site 1 spines for ISN connections

C. Connect all spines to the IPN and ISN

D. Filter the advertisement of the Site 2 TEP pool into the IPN

Correct Answer: A