



Interconnecting Cisco Networking Devices Part 1

Pass Cisco 640-822 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/640-822.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

- 😳 365 Days Free Update
- 800,000+ Satisfied Customers






QUESTION 1

Refer to the exhibit. A technician pastes the configurations in the exhibit into the two new routers shown.

Otherwise, the routers are configured with their default configurations. A ping from Host1 to Host2 fails, but the technician is able to ping the S0/0 interface of R2 from Host1. The configurations of the hosts have been verified as correct. What could be the cause of the problem?

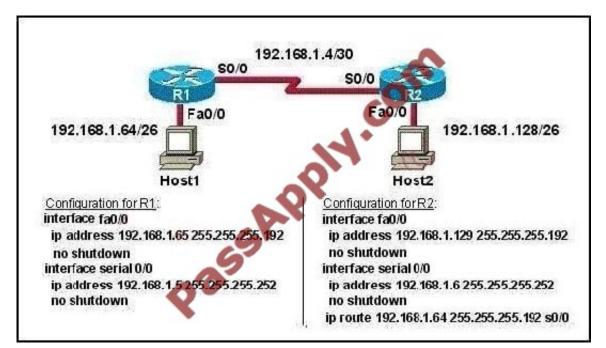

A. The serial cable on R1 needs to be replaced.

- B. The interfaces on R2 are not configured properly.
- C. R1 has no route to the 192.168.1.128 network.
- D. The IP addressing scheme has overlapping subnetworks.
- E. The ip subnet-zero command must be configured on both routers.

Correct Answer: C

QUESTION 2

What is the purpose of assigning an IP address to a switch?

- A. provides local hosts with a default gateway address
- B. allows remote management of the switch
- C. allows the switch to respond to ARP requests between two hosts
- D. ensures that hosts on the same LAN can communicate with each other



Correct Answer: B

QUESTION 3

A workstation has just resolved a browser URL to the IP address of a server. What protocol will the workstation now use to determine the destination MAC address to be placed into frames directed toward the server?

A. HTTP

B. DNS

C. DHCP

D. RARP

E. ARP

Correct Answer: E

QUESTION 4

In a lab environment you are connecting two routers using their Fast Ethernet ports. What type of cable will allow normal connectivity between the two routers?

- A. rollover
- B. crossover
- C. null modem
- D. straight-through

Correct Answer: B

QUESTION 5

Which of the following are characteristics of a Frame Relay point-to-point subinterface? (Choose two.)

- A. requires use of Inverse ARP
- B. resolves NBMA split horizon issues
- C. requires the frame-relay map command
- D. maps one IP subnet per DLCI
- E. maps one IP subnet across multiple DLCIs

Correct Answer: BD



Latest 640-822 Dumps

640-822 VCE Dumps

640-822 Practice Test



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.passapply.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:



One Year Free Update



Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.



Money Back Guarantee

To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.



Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.

Any charges made through this site will appear as Global Simulators Limited. All trademarks are the property of their respective owners. Copyright © passapply, All Rights Reserved.