642-980 Q&As

Troubleshooting Cisco Data Center Unified Fabric

Pass Cisco 642-980 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/642-980.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase
100% Money Back Guarantee
365 Days Free Update
800,000+ Satisfied Customers

QUESTION 1

Why do the lists not contain the same switches, after you issue the commands show cfs peers name and show cfs merge status?

A. The merge cannot occur until the VSAN IDs are synched.

B. The Cisco Fabric Services fabric has a physical port fault that should be investigated.

C. The fabric is partitioned into multiple Cisco Fabric Services fabrics.

D. Cisco Fabric Services need to be restarted to see the new switches.

E. A Cisco Fabric Services database lock has prevented the merge.

Correct Answer: C

QUESTION 2

Refer to the exhibit.

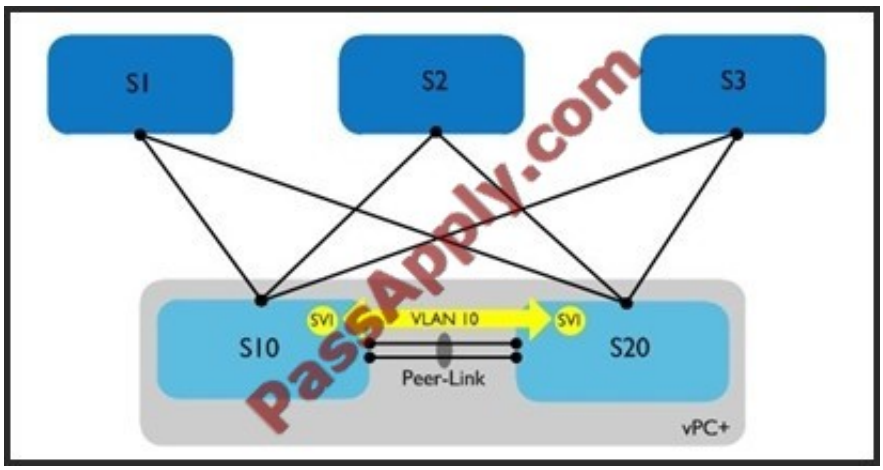

An administrator sets up a FabricPath network. The administrator tries to ping between two SVI interfaces on the leaf switches 10 and 20, but it fails. What caused the pings to fail?

A. Switches S10 and S20 do not have F2 modules.

B. The vPC peer gateway must be enabled on switches S10 and S20.

C. Switches S1, S2, and S3 should be interconnected directly.

D. VLAN 10 is not enabled on the spine switches (S1, S2, and S3).

E. Layer 3 over a vPC+ peer link is not supported.

Correct Answer: D

QUESTION 3

A customer is troubleshooting FCoE in its network and sees pause counters increasing when it runs the command show interface eth1/5. What is the cause of this?

A. The CNA connected to the switch is sending Xon or Xoff PFC frames.

B. The HBA connected to the switch is sending Xon or Xoff PFC frames.

C. Pause counters increase regularly; there is nothing to be concerned about.

D. A firmware upgrade on the Fibre Channel adapter that is connected to the switch will fix this issue.

Correct Answer: A

QUESTION 4

You have enabled configuration synchronization between two Cisco Nexus 5548UP Switches. You create a port channel on switch 1 and determine that it was not synchronized with its peer. The peer switch can be pinged on the management VRF. When you check your peer status, you receive a "peer not reachable" message in the command output. What is the explanation for this?

A. CDP is disabled.

B. An LACP mismatch exists on the peer interfaces.

C. UDLD is disabled.

D. CFSoIP is disabled.

E. Multicast routing is enabled.

Correct Answer: D

QUESTION 5

Which option describes whythe merge status for any application shows "In Progress" for a prolonged period of time when a new switch is added to the fabric?

A. The new switch must be upgraded to match the same version of code as the original switch.

B. The ports between the switches are not trunking all VSANs.

C. The application needs to be started on both switches.

D. There are outstanding changes that must be committed.

E. The merge status cannot occur until a copy running-config startup-config is done.

Correct Answer: D

Latest 642-980 Dumps 642-980 PDF Dumps 642-980 Exam Questions

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.passapply.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

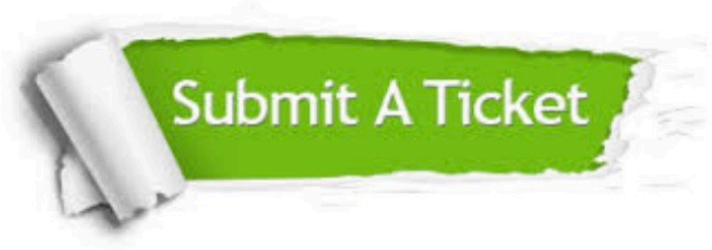

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © passapply, All Rights Reserved.