



E20-326^{Q&As}

Symmetrix Solutions Design Exam for Technology Architects Exam

Pass EMC E20-326 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/e20-326.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by EMC
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit.

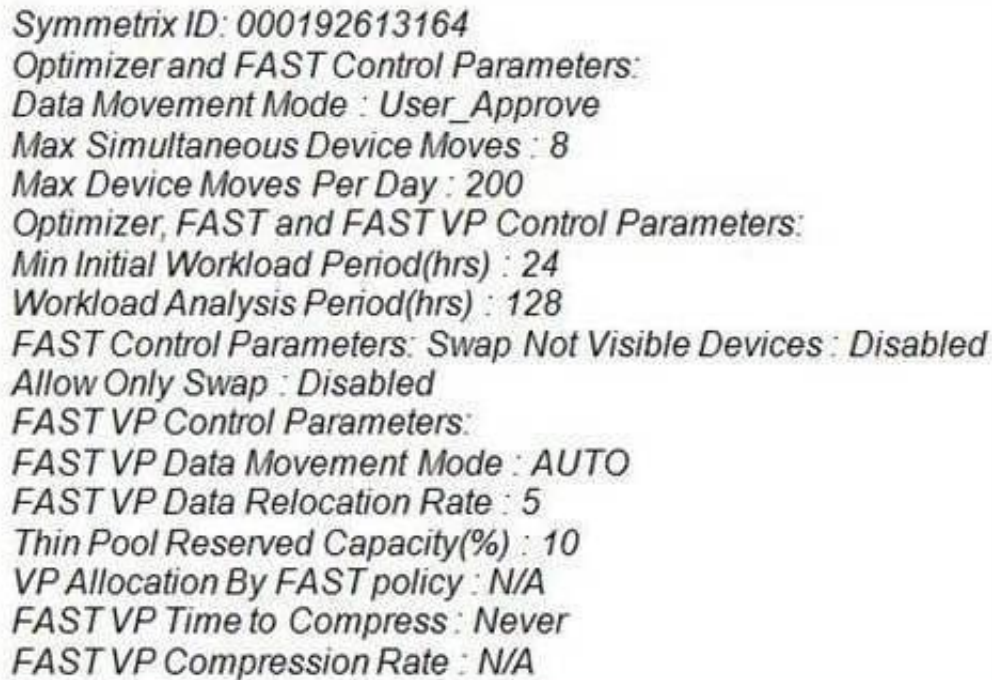

Symmetrix ID: 000192613164
Optimizer and FAST Control Parameters:
Data Movement Mode : User_Approve
Max Simultaneous Device Moves : 8
Max Device Moves Per Day : 200
Optimizer, FAST and FAST VP Control Parameters:
Min Initial Workload Period(hrs) : 24
Workload Analysis Period(hrs) : 128
FAST Control Parameters: Swap Not Visible Devices : Disabled
Allow Only Swap : Disabled
FAST VP Control Parameters:
FAST VP Data Movement Mode : AUTO
FAST VP Data Relocation Rate : 5
Thin Pool Reserved Capacity(%) : 10
VP Allocation By FAST policy : N/A
FAST VP Time to Compress : Never
FAST VP Compression Rate : N/A

A customer has a Symmetrix VMAX storage array configured with FAST VP using three storage tiers. Policies are active for all storage groups on the array. The customer would like to increase the size of data movement requests. The current configuration of FAST is shown in the exhibit.

Which parameter should be changed?

- A. Data Relocation Rate
- B. Max Simultaneous Moves
- C. Max Moves per Day
- D. Data Movement Mode

Correct Answer: A

QUESTION 2

A proposed SRDF/S solution was modeled with BCSD using host-based data. · The BCSD model assumed two engine VMAX arrays with SRDF Fibre ports. · The RA Utilization chart shows a maximum utilization of 45%. The "Volume Exceptions" table lists five devices.

What should you recommend?



- A. Change the application layout
- B. Add more remote adapters
- C. Use three engine VMAX arrays
- D. Turn on software compression on the remote adapters

Correct Answer: A

QUESTION 3

What is the size of a thin device extent in a Symmetrix VMAX?

- A. 768 KB
- B. 512 KB
- C. 64 KB
- D. 1024 KB

Correct Answer: A

QUESTION 4

What is the purpose of ISL trunking?

- A. Multi pathing
- B. Inter switch communication
- C. Traffic load balancing
- D. FC Routing

Correct Answer: C

QUESTION 5

Which two tools should be used to compute the Capacity Available for Active Replication (CAAR)?

- A. SymmMerge and Direct Express (Channel Express)
- B. SymmMerge and Tier Advisor
- C. BCSD and Direct Express (Channel Express)
- D. BCSD and Tier Advisor

Correct Answer: A



VCE & PDF

PassApply.com

<https://www.passapply.com/e20-326.html>

2024 Latest passapply E20-326 PDF and VCE dumps Download

[Latest E20-326 Dumps](#)

[E20-326 Study Guide](#)

[E20-326 Braindumps](#)