



JN0-533^{Q&As}

FWV, Specialist (JNCIS-FWV)

Pass Juniper JN0-533 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-533.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


You want to ensure that the ScreenOS device sends alert data to notify the security operation center. Which three log destinations would you set to accomplish your objective? (Choose three.)

- A. e-mail
- B. SNMP
- C. console
- D. internal
- E. syslog

Correct Answer: ABE

QUESTION 2

In the exhibit, eth3/1 is in the client-vr virtual router and eth3/2 is in the server-vr virtual router. Your policies permit all traffic between all zones. You want to ensure Client1 can contact Server1. In this scenario, which two statements are true? (Choose two.)

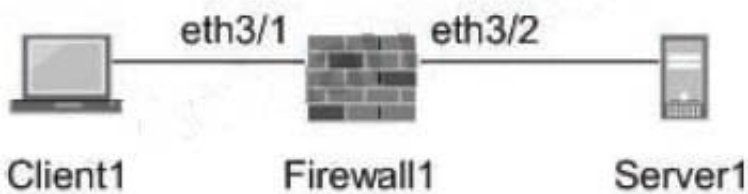

- A. By default, all interface routes are automatically imported into all virtual routers.
- B. You can configure a static route for Server1 in the client-vr virtual router that points to eth3/2.
- C. You can configure a static route for Server1 in the client-vr virtual router that points to the server-vr virtual router.
- D. You can configure a route export policy to export the route for Server1 to the client-vr virtual router.

Correct Answer: CD

QUESTION 3

During main mode negotiations a failure has occurred while using IKE certificates. Which message pair would you review to troubleshoot this failure?

- A. messages 1 - 2
- B. messages 2 - 3



C. messages 3 - 4

D. messages 5 - 6

Correct Answer: D

QUESTION 4

You want to copy an external configuration file to your ScreenOS device and have it become active only after the device reboots. How would you accomplish this goal?

- A. From the device, copy the configuration from an external TFTP server to the device's flash memory.
- B. From the device, copy the configuration from an external TFTP server to the device's RAM.
- C. From the device, copy the configuration from an external TFTP server and merge it with the current configuration.
- D. From the device, copy the configuration from the device's flash memory to an external TFTP server.

Correct Answer: A

QUESTION 5

You have entered the command

```
set ffilter src-ip 1.1.7.250 dst-ip 10.1.10.5 ip-prot 6
```

What will be the resulting output in the debug for which this was created?

- A. If the packet has a src-ip of 1.1.7.250 or a dst-ip of 10.1.10.5 or has TCP as its protocol then it will be captured
- B. If the packet has a src-ip of 1.1.7.250 or a dst-ip of 10.1.10.5 or has UDP as its protocol then it will be captured
- C. If the packet has a src-ip of 1.1.7.250 and a dst-ip of 10.1.10.5 and has TCP as its protocol then it will be captured
- D. If the packet has a src-ip of 1.1.7.250 and a dst-ip of 10.1.10.5 and has UDP as its protocol then it will be captured

Correct Answer: C

[JN0-533 Practice Test](#)

[JN0-533 Study Guide](#)

[JN0-533 Exam Questions](#)