



JN0-692^{Q&As}

Service Provider Routing and Switching Support, Professional

Pass Juniper JN0-692 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-692.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Two of your customers have just merged into a single company. Because of time constraints, you have been asked to connect Customer A's BGP-signaled Layer 2 VPN with Customer B's LDP-signaled Layer 2 circuit using the interworking interface.

Which two statements are true? (Choose two).

- A. You must have a tunnel PIC to create the interworking interface.
- B. You must configure the Layer 2 interworking protocol.
- C. The logical interworking interfaces must specify their logical peer units.
- D. The Junos OS automatically links the interworking interface units.

Correct Answer: BC

QUESTION 2


An IS-IS level 1-only router is configured within a larger multilevel hierarchy. Which OSPF area type resembles the routing information in the L1 router's table?

- A. OSPF default area
- B. OSPF stub area
- C. OSPF NSSA
- D. OSPF NSSA with no summaries

Correct Answer: D

QUESTION 3

Click the Exhibit button.

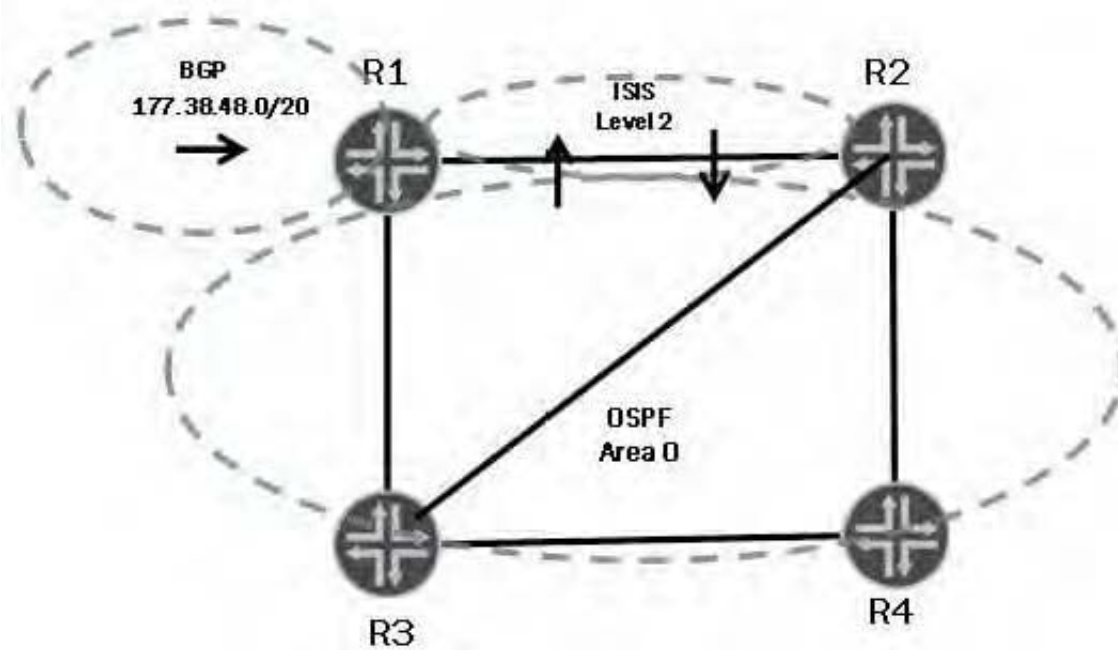

In the exhibit, R1 is advertising a BGP route into both IS-IS and OSPF. There is mutual redistribution from R1 and R2 into both OSPF and IS-IS.

The following traceroute is performed on R4:

```
user@R4> traceroute 177.38.48.1 ttl 10
traceroute to 177.38.48.1 (177.38.48.1), 10 hops max, 40 byte packets
 1 R3 (67.176.0.21)  9.011 ms  9.690 ms  9.618 ms
 2 R1 (67.176.0.13)  7.742 ms  10.603 ms  6.200 ms
 3 R2 (67.176.0.11)  11.726 ms  12.128 ms  13.842 ms
 4 R4 (67.176.0.33)  10.740 ms  11.855 ms  10.632 ms
 5 R3 (67.176.0.21)  16.012 ms  13.542 ms  12.903 ms
 6 R1 (67.176.0.13)  13.780 ms  13.573 ms  13.223 ms
 7 R2 (67.176.0.11)  16.344 ms  11.528 ms  12.869 ms
 9 R3 (67.176.0.21)  12.624 ms  17.225 ms  14.596 ms
10 R1 (67.176.0.13)  21.244 ms  19.124 ms  15.726 ms
```

What is one way to fix the routing loop?



- A. OnR1:
[edit]
user@R1# set protocols bgp preference 145
- B. OnR1:
[edit]
user@R1# set protocols isis level 2 wide-metrics-only
- C. OnR4:
[edit]
user@R4# set protocols ospf external-preference 180
- D. On all routers:
[edit]
user@router# set protocols ospf reference-bandwidth 10g

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: A

QUESTION 4

Click the Exhibit button.



```
user@FE2> show route advertising-protocol bgp 192.168.3.1  
  
customer-vpn.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)  
  Prefix  Nexthop      MED    Lclpref   AS path  
* 172.16.2.0/24      Self          100      I  
* 172.16.20.0/30     Self          100      65001 I  
* 172.16.20.4/30     Self          100      65001 I  
* 172.16.20.8/30     Self          100      65001 I
```

```
user@FE1> show route advertising-protocol bgp 172.16.1.2
```

```
user@FE1> show route receive-protocol bgp 192.168.4.1  
  
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)  
customer-vpn.inet.0: 6 destinations, 6 routes (2 active, 0 holddown, 4 hidden)  
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)  
mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)  
bgp.l3vpn.0: 4 destinations, 4 routes (0 active, 0 holddown, 4 hidden)
```

Customer A is complaining that routes advertised from the CE2 router are not being received on the CE1 router. The physical topology of the network is CE1-PE1-PE2-CE2. The CE1-PE1 subnet is 172.16.1.0/24. The CE2-PE2 subnet is 172.16.2.0/24. PE1's loopback is 192.168.3.1 and PE2's loopback is 192.168.4.1. Referring to the output in the exhibit, what is the problem?

- A. No LSP exists between PE1 and PE2.
- B. Route targets are not properly configured.
- C. as-override is not configured in the VRFs.
- D. family inet-vpn is not configured on the PEs.

Correct Answer: A

QUESTION 5

An administrator wants to block the re-advertisement of the 10.10.255.6 FEC to all LDP neighbors while still advertising the local router's loopback address. What will accomplish this?



- A. ldp {
 egress-policy block-one;
 interface all;
}
- policy-options {
 policy-statement block-one {
 term 1 {
 from {
 route-filter 10.10.255.6/32 exact reject;
 }
 }
 term 2 {
 then accept;
 }
 }
}
- B. ldp {
 export block-one;
 interface all;
}
- policy-options {
 policy-statement block-one {
 term 1 {
 from {
 route-filter 10.10.255.6/32 exact reject;
 }
 }
 term 2 {
 then accept;
 }
 }
}
- C. ldp {
 import block-one;
 interface all;
}
- policy-options {
 policy-statement block-one {
 term 1 {
 from {
 route-filter 10.10.255.6/32 exact reject;
 }
 }
 term 2 {
 then accept;
 }
 }
}
- D. ldp {
 ingress-policy block-one;
 interface all;
}
- policy-options {
 policy-statement block-one {



A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: B

[JN0-692 PDF Dumps](#)

[JN0-692 Practice Test](#)

[JN0-692 Braindumps](#)