



PW0-104^{Q&As}

Wireless LAN Administration Exam

Pass CWNP PW0-104 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/PW0-104.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by CWNP
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Given: ABC Company has hired you to perform an initial site survey of their facility. During an interview, the network manager informs you that the new wireless network must use 5 GHz bands and OFDM, and VoWiFi handsets will be used extensively over the wireless network.

What items do you need to include in the RF site survey report? (Choose 2)

- A. A heat map demonstrating signal quality in areas where VoWiFi is supported.
- B. Codec types and sampling rates for each VoWiFi phone
- C. Security parameters and configuration steps for VoWiFi handsets.
- D. Test results from an active survey with a VoWiFi handset
- E. Results of DFS compliance tests for each AP

Correct Answer: AD

QUESTION 2

What statements describe industry practices for communication protocols between WLAN controllers and controller-based APs? (Choose two)

- A. All vendors use the same protocol so that APs will interoperate with WLAN controllers from other vendors.
- B. Some vendors use proprietary protocols, and some vendors use protocols based on public standards like RFCs.
- C. For most vendors, the controller-based APs maintain data and control tunnels with at least two controllers for immediate failover and redundancy.
- D. All vendors support at least one L2 or L3 broadcast protocol for controller discovery by controller-based APs.
- E. All vendors recommend using L2 (instead of L3) controller discovery and tunneling protocols in large enterprises.

Correct Answer: BD

QUESTION 3

Given: In a single channel architecture (SCA) WLAN system, 802.11n (HT) APs should not share an SSID with 802.11g (ERP) APs.

What is the reason for this recommendation?

- A. Client stations would see two different sets of AP capabilities as they roam between APs with the same BSSID.
- B. The added range of 802.11n APs would cause additional co-channel interference.
- C. The additional beacon material in 802.11n beacons would confuse 802.11b/g client stations.



D. Beacons from 802.11n APs use 40 MHz channels, while beacons from 802.11g APs use 20 MHz channels.

Correct Answer: A

QUESTION 4

Given the Wi-Fi certification shown in the exhibit, what statement is FALSE about this device?

Wi-Fi CERTIFIED™ Interoperability Certificate Certification ID: WFA11082

 This certificate lists the capabilities and features that have successfully completed Wi-Fi Alliance interoperability testing. Additional information about Wi-Fi Alliance certification programs is available at www.wi-fi.org/certification_programs.php.

Tested Spatial Streams	Dual-Band Selectable	
	2.4 GHz	5.0 GHz
Transmit	1	1
Receive	1	1

Certificate Date: March 04, 2011
Company: [Redacted]
Product: [Redacted]
Model/SKU #: [Redacted]
Category: Tablet

IEEE Standard	Security	Multimedia	Convergence
IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11h	WPA® - Enterprise, Personal WPA2® - Enterprise, Personal <u>Vendor EAP Type(s)</u> EAP-TLS EAP-TTLS/MSCHAPv2 PEAPv0/EAP-MSCHAPv2 PEAPv1/EAP-GTC	WMM®	CWG-RF

- A. This client device supports protection mechanisms such as RTS/CTS and/or CTS-to-Self.
- B. This client device supports both TKIP and CCMP cipher suites.
- C. 300 Mbps is the maximum supported data rate for this device.
- D. This client device supports the ERP, OFDM, and HT physical layer specifications.
- E. This client device supports X.509 certificates for EAP authentication.

Correct Answer: C

QUESTION 5

In an 802.11n 2.4 GHz BSS, what prevents each station from using the full network bandwidth (e.g. 130 Mbps) when



multiple clients are actively exchanging data with the AP? (Choose two)

- A. Radio receiver hardware cannot process data as quickly as it can be transmitted.
- B. Half of the bandwidth is allocated to uplink traffic and half to downlink traffic.
- C. The DCF and EDCA coordination functions require backoff algorithms
- D. WLAN devices cannot detect collisions and must receive positive frame acknowledgment.
- E. WLANs rely on the CSMA/CD protocol and must wait a collision detection period after each frame is transmitted.

Correct Answer: CD

[PW0-104 PDF Dumps](#)

[PW0-104 VCE Dumps](#)

[PW0-104 Study Guide](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !


100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

<https://www.passapply.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

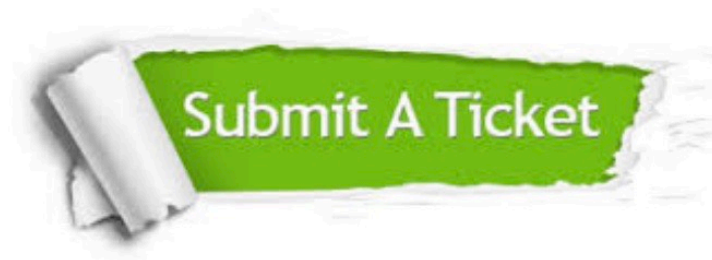

 One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.	 Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.	 Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.
---	---	--

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © passapply, All Rights Reserved.