



# DES-4122<sup>Q&As</sup>

Specialist - Implementation Engineer PowerEdge Version 2.0

**Pass EMC DES-4122 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/des-4122.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by EMC  
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





## QUESTION 1

A technician wants to remotely log in to a server but finds that the iDRAC virtual Console feature is not available. Use the simulator to explore the system. What is the cause of this issue?

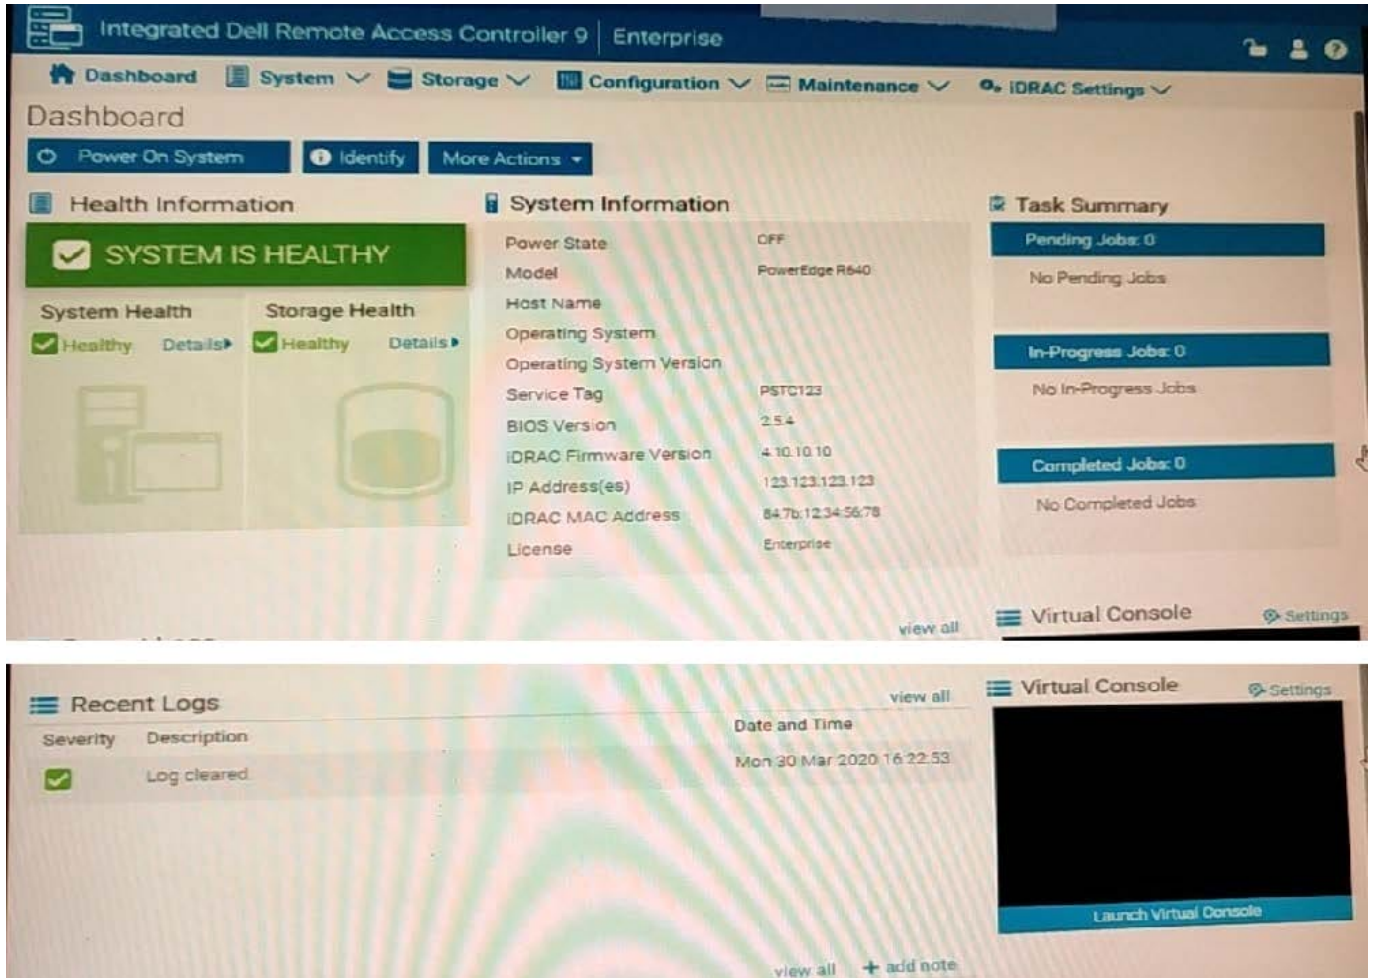

Note: It is necessary to close (x) the simulator window before you can select a response to this question.

- A. The Virtual Console is disabled
- B. Operating system not installed on remote server
- C. The server has been powered down
- D. There are more than the maximum number of active sessions

Correct Answer: C

## QUESTION 2

What is a key distinction between iDRAC8 and iDRAC9?



- A. iDRAC9 offers HTML5 based GUI
- B. iDRAC9 default credentials are root/calvin orderable only
- C. iDRAC8 offers HTML5 based GUI
- D. iDRAC8 default credentials are customer orderable

Correct Answer: C

---

### QUESTION 3

Starting from which Dell EMC PowerEdge server hardware generation is the Micro SD card in the IDSDM/vFlash module supported?

- A. 11G
- B. 12G
- C. 13G
- D. 14G

Correct Answer: D

---

### QUESTION 4

Which rear disk drive option is available in a Dell EMC PowerEdge R740xd server?

- A. 4x 3.5" drives
- B. 2x3.5" drives
- C. 8x2 5" drives
- D. 6x2 5" drives

Correct Answer: B

---

### QUESTION 5

What is the purpose of the Silicon-Based Hardware Root of Trust feature in Dell EMC PowerEdge 14G servers?

- A. Ensures that the installed operating system is authentic
- B. Ensures that the server has a valid Service Tag number
- C. Ensures that no unauthorized BIOS or firmware codes are run
- D. Ensures that the server boots only when connected to a verified network



Correct Answer: C

[DES-4122 PDF Dumps](#)

[DES-4122 VCE Dumps](#)

[DES-4122 Braindumps](#)