



H12-831^{Q&As}

HCIP-Datcom-Advanced Routing & Switching Technology V1.0

Pass Huawei H12-831 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/h12-831.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

As shown below:

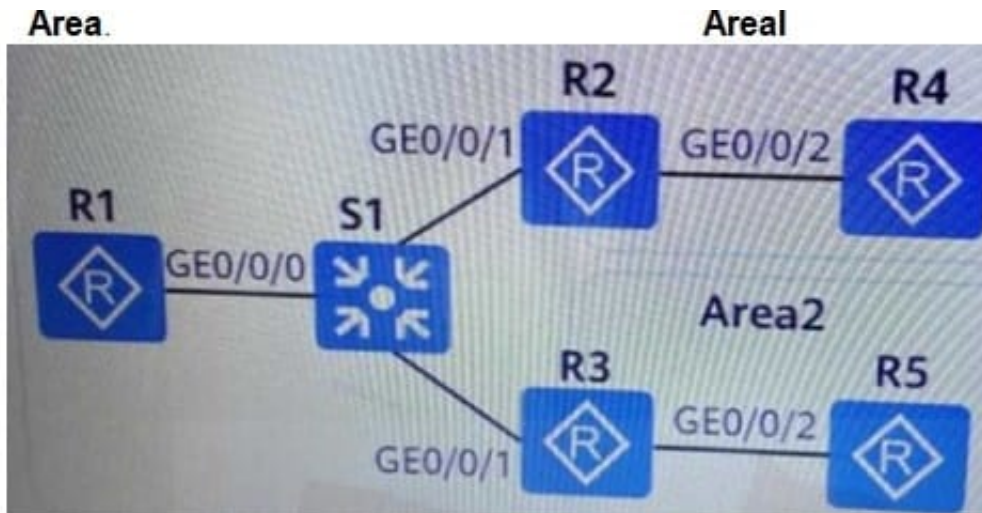

```
[R2] ad 2000 [R2-ad-basic-2000]rule deny [R2-ad-basic-2000]quit # [R2] ospf [R2-ospf?]area 1 [R2-ospM-area-0.0.0.1]
filter 2000 import [R2-ospf-1-area-0.0.0.1] quit [R2-ospf-1] default-route-advertise always
```

- A. Area2containsType5LSAflood
- B. Area2no insideType3 LSAflood
- C. ArealcontainsType5 LSAflood
- D. Arealno insideType3 LSAflood

Correct Answer: D

QUESTION 2

During the process of viewing the debug input through the SSH terminal, there is a lot of pop-up information. Which of the following operations can make the monitor terminal no longer pop up the debug message?

- A. Open Notepad and enterundo terminal debugging,Copy the command line and paste it intoMonitorinterface
- B. Open Notepad and enterundo debugging all,Copy the command line and paste it intoMonitorinterface
- C. Open Notepad and enterundo terminal monitor,Copy the command line and paste it intoMonitorinterface
- D. exit currentMonitorinterface, re-SSHLog in to the device to open a new oneMonitorinterface

Correct Answer: AB

QUESTION 3



MPLS is called Multi-Protocol Label Switching. Regarding the label description in MPLS, the correct one is:

- A. MPLS The system has a variety of label publishing protocols, such as LDP is a label publishing agreement
- B. Labeled by MPLS header of message It has global significance, that is, the label values of all routers cannot be repeated.
- C. A label is a fixed-length identifier with only local significance, which is used to uniquely identify the group to which a group belongs. FEC
- D. MPLS Supports single-layer labels as well as multi-layer labels

Correct Answer: ACD

QUESTION 4

A network engineer entered the following information when troubleshooting OSPF faults. Based on this, you can judge what causes the adjacency relationship to fail to be established normally?

OSPF Process 1 with Router ID 10.0.12.2			
OSPF error statistics			
Interface: GigabitEthernet0/0/0 (10.0.122)			
General packet errors:			
0	Bad version	0	Bad checksum
0	Bad area id	0	Bad authentication type
10	Bad authentication key	0	Unknown neighbor
	Bad net segment	0	Extern option mismatch
10	Router id confusion		
HELLO packet errors:			
2	Netmask mismatch	0	Hello timer mismatch
0	Dead timer mismatch	0	Invalid Source Address

- A. Authentication passwords do not match
- B. Inconsistent area type
- C. Hello timer mismatch
- D. interface IP inconsistent address masks

Correct Answer: D

QUESTION 5

In BGP/MPLS IP VPN, the OSPF multi-instance process uses the DN bit to prevent Type5 LSA loops.



A. True

B. False

Correct Answer: B

[Latest H12-831 Dumps](#)

[H12-831 Practice Test](#)

[H12-831 Exam Questions](#)