



H12-831^{Q&As}

HCIP-Datacom-Advanced Routing & Switching Technology V1.0

Pass Huawei H12-831 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/h12-831.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

In intra-domain MPLS VPN networks, data packets will be encapsulated with two layers of MPLS when they enter the public network and are forwarded label, the description of the two-layer label in the following options is wrong

- A. MPLS VPN The outer label is made by LDP protocol or statically assigned, the inner label is assigned by the correct end MP-BGP assigned by neighbors
- B. MPLS VPN The outer layer label is called the private network label, and the inner layer label is called the public network label
- C. By default, the outer label is singled out before the packet is forwarded to the last hop device
- D. Layer labels are used in PE The device sends the packet correctly to the corresponding VPN middle

Correct Answer: B

QUESTION 2


In BGP/MPLS IP VPN, the OSPF multi-instance process uses the DN bit to prevent Type5 LSA loops.

- A. True
- B. False

Correct Answer: B

QUESTION 3

In the topology shown in the figure, the entire network runs OSPFv3 agreement in NoIn the case of attracting external routes, R1 which type of LSA?

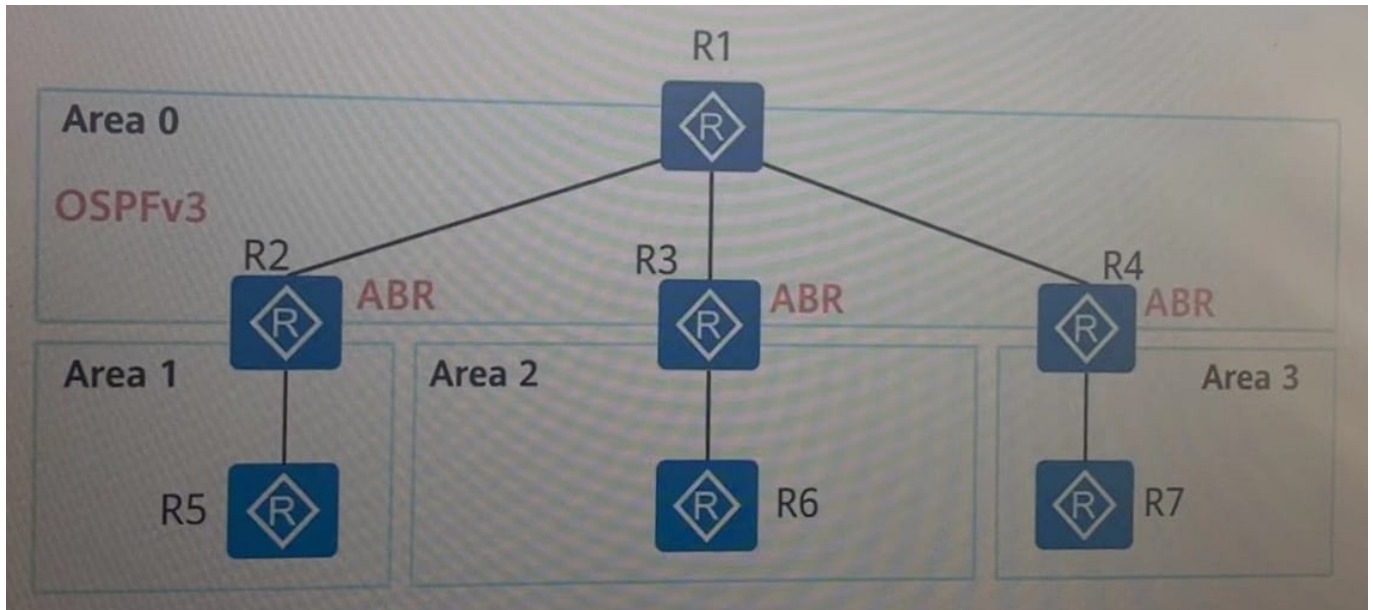

- A. Intra-Area-Prefix-LSA
- B. Link-LSA
- C. Inter-Area-Router LSA
- D. Inter-Area-Prefix-LSA

Correct Answer: C

QUESTION 4

In the MPLS network, there are different operation types for labels, among which the meaning of the "pop" action is:

- A. Replace the top label with another value
- B. existMPLSAdd the top label to the label stack
- C. Replace the top label with another set of labels
- D. existMPLSRemove the top label from the label stack

Correct Answer: D

QUESTION 5

During the test phase of the cutover, the criteria to indicate that the test has been completed are:

- A. IPThe configuration view result of the device is normal as the standard
- B. Test that the network service is normal as the standard
- C. The upper-layer application service test carried by the network is normal as the standard



D. Check that the network is running normally as a standard

Correct Answer: C

[Latest H12-831 Dumps](#)

[H12-831 VCE Dumps](#)

[H12-831 Exam Questions](#)