



H12-891^{Q&As}

HCIE-Datacom V1.0

Pass Huawei H12-891 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/h12-891.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


In a VXLAN network, traffic is connected to the VXLAN network, and it can also be used to communicate with the same subnet within the same XLAN network

- A. NVE interface
- B. VXVAN L2 Gateway
- C. VXLAN L3 Gateway
- D. VLANIF interface

Correct Answer: B

QUESTION 2

In a network, the same gigabit running S and OSPF anti-tampering and fluttering as shown in the figure, on the two border routers RTB and RTC are introduced into the wine route, the device question is to use gigabit one port strobe, , 222 The network is introduced into the OSE via impotrote direct on the RTD, assuming that all other configurations are dead default configurations, then the description of this network is wrong ?

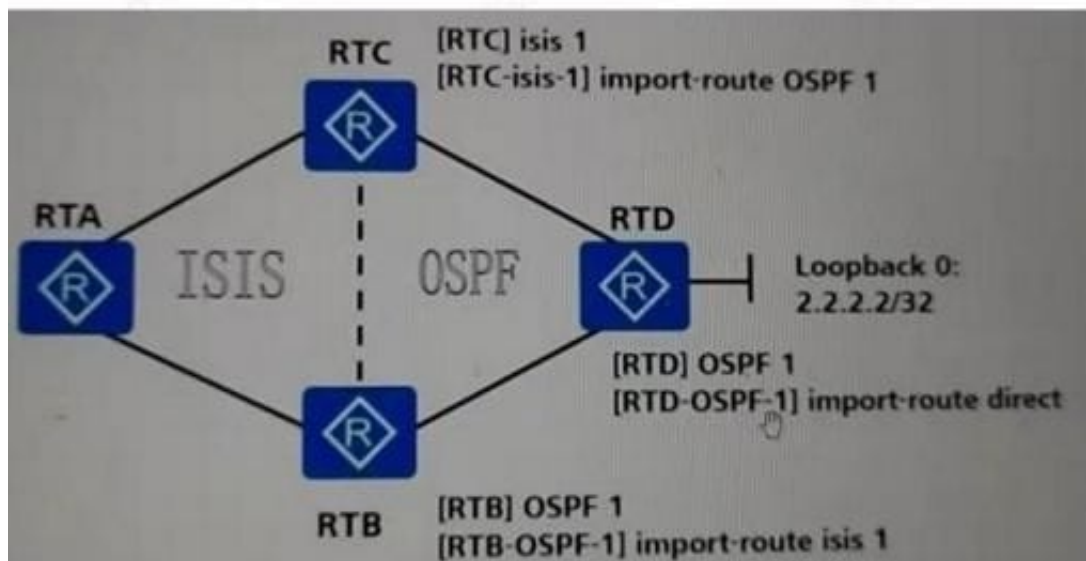


- A. Adjusting the ISIS priority to 160 on the RTB avoids suboptimal routing problems in the network.
- B. On the RTC, the following configuration is adopted, only the routes of the 2222/32 cinder segment can be filtered out when routing is introduced, IRTClip ip-prefix 10 index 1 deny2 000 8 less-equal 32
- C. RTB learns that the routing next hop for the 2222/32 network segment is RTA
- D. The following configuration can filter out the routes of the 2222/32 CIDR block of the white RTD when RTC introduces OSPF routes.

Correct Answer: B



QUESTION 3

As shown in the figure, an engineer uses four routers to test the interoperability of branch networks, where R1, R2, and R3 in branch 1 deploy OSPF Network interoperability is implemented, and R, R3, R4 in Branch 2 is deployed is-IS to achieve network interoperability. Now that the engineer wants to implement R1 access to R4's loopback address, which of the following actions will meet this requirement?

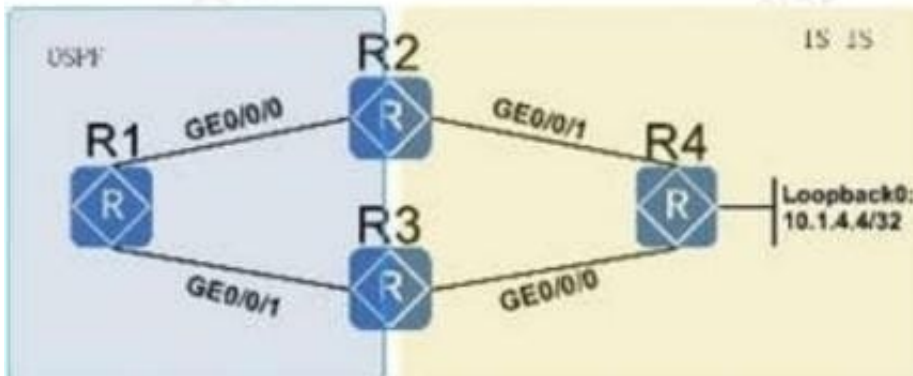

- A. No configuration is required
- B. Publish default routes only in the OSPF process for R2
- C. In the OSPF process of R2 and the IS-IS process, the default routes are published separately
- D. Publish the default route only in the IS-IS process of R2

Correct Answer: BC

QUESTION 4

Which field in the IPv6 basic header has a similar effect to which field in the IPv4 header does?

- A. Flags
- B. Protocol
- C. Time to Live
- D. Identification

Correct Answer: C

QUESTION 5

What kind of scenario can use AS one path and one filter?

- A. Filter routes received from BGP neighbors based on the AS PATH attribute that the route carries. For example, the command `peer x.X.x.x as-path-filter import`



B. The apply clause in Route-policy

C. Filter routes sent to BGP neighbors based on the AS PATH attribute that the route carries. For example, the command peer x.x.x as-path-filter export

D. If-match clause answer in Route-policy.

Correct Answer: ACD

[H12-891 PDF Dumps](#)

[H12-891 Practice Test](#)

[H12-891 Braindumps](#)