



# H12-891<sup>Q&As</sup>

HCIE-Datacom V1.0

## Pass Huawei H12-891 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/h12-891.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

In a shared network, what mechanism does PIM-SM use to prevent duplicate traffic?( Single choice questions).

- A. Register mechanism
- B. BSR/RP mechanism
- C. Assert mechanism
- D. Join/Prune mechanism

Correct Answer: C

### QUESTION 2


Because BGP is an EGP routing protocol, BGP routing policies can only be deployed between EBGP neighbors, and routing policies between IBGP neighbors are not valid.

- A. TRUE
- B. FALSE

Correct Answer: B

### QUESTION 3

In a network, the same gigabit running S and OSPF anti-tampering and fluttering as shown in the figure, on the two border routers RTB and RTC are introduced into the wine route, the device question is to use gigabit one port strobe, , 222 The network is introduced into the OSE via impotrote direct on the RTD, assuming that all other configurations are dead default configurations, then the description of this network is wrong ?

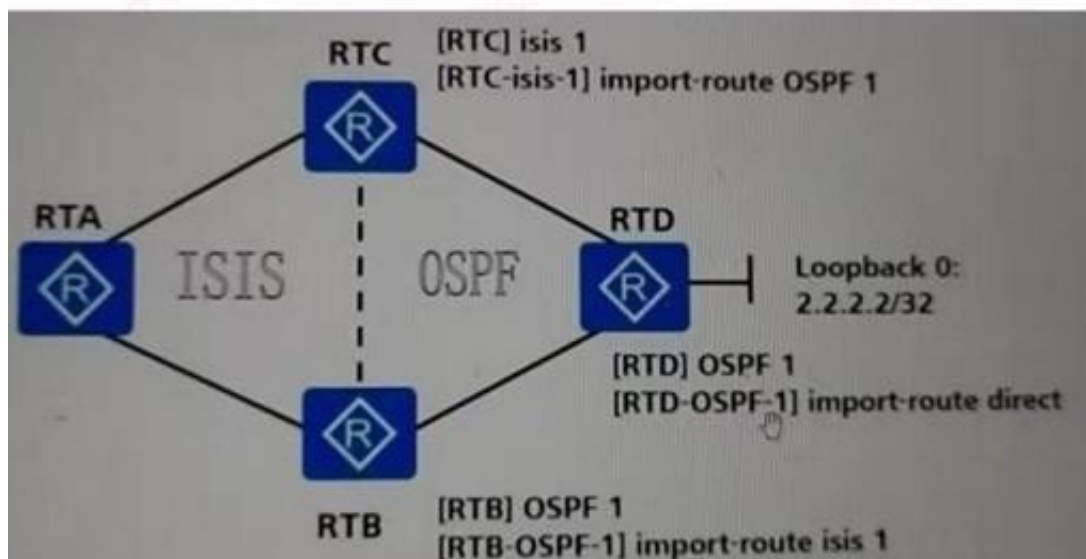



- A. Adjusting the ISIS priority to 160 on the RTB avoids suboptimal routing problems in the network.
- B. On the RTC, the following configuration is adopted, only the routes of the 2222/32 cinder segment can be filtered out when routing is introduced, IRTClip ip-prefix 10 index 1 deny 2 000 8 less-equal 32
- C. RTB learns that the routing next hop for the 2222/32 network segment is RTA
- D. The following configuration can filter out the routes of the 2222/32 CIDR block of the white RTD when RTC introduces OSPF routes.

Correct Answer: B

---

#### QUESTION 4

The most effective way to view device warnings through the CLI is ?

- A. Display alarm
- B. Display current-configuration
- C. Display interface brief
- D. Display clock

Correct Answer: A

---

#### QUESTION 5

Which of the following statements about RADIUS is correct?( Single choice questions).

- A. MAC authentication does not require a username password, so you cannot use RADIUS to authenticate the user.
- B. RADIUS supports both wired and wireless access modes.
- C. SEPARATION OF RADIUS PROTOCOL AUTHENTICATION, AUTHORIZATION, AND AUDIT.
- D. RADIUS authentication and Portal authentication cannot be used together because the Portal server can typically be used to authenticate users when portal authentication is deployed.

Correct Answer: B

[Latest H12-891 Dumps](#)

[H12-891 VCE Dumps](#)

[H12-891 Practice Test](#)