



H31-161^{Q&As}

HCIE-Carrier IP (Written) V2.0

Pass Huawei H31-161 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/h31-161.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Which command is used to query the aging time of the firewall session .

- A. display firewall session table
- B. display firewall session table verbose
- C. display firewall packet-filter default all
- D. display firewall server-map

Correct Answer: BD

QUESTION 2

The Huawei router is the hop RD where the SSM mapping function is enabled at the interface. Some IGMPv2 hosts expect to receive (1.0.01,232.1.0.1) (1.0.0.1232.1.0.2), and (2.0.0,232.1.3.2) data. How can you satisfy the preceding requirement with the least configurations?

- A. ssm-mapping 232.1.3.2 16.2.0.0.1
- B. ssm mapping 232.1.3.1.24.2.0.0.1
- C. ssm-mapping 232. 1 308 2 00.1
- D. ssm-mapping 232 1.0. 1 32. 1. 0. 0. 1
- E. ssm-mapping 232. 1.0. 2. 32. 1. 0. 0. 1
- F. ssm-mapping 232. 1. 0. 0. 24. 1. 0. 0. 1

Correct Answer: C

QUESTION 3

Which statement is false?


- A. The ASM multicast forwarding model does not allow the receiver to specify a multicast source.
- B. The PIM SSM multicast routing protocol cannot set up shared multicast forwarding trees.
- C. The SSM multicast forwarding model considers an (S,G) entry as one channel.
- D. The IGMP SSM Mapping function is to map a (*,G) Join message reported by the host to an (S,G) Join message

Correct Answer: D

QUESTION 4



Exhibit.

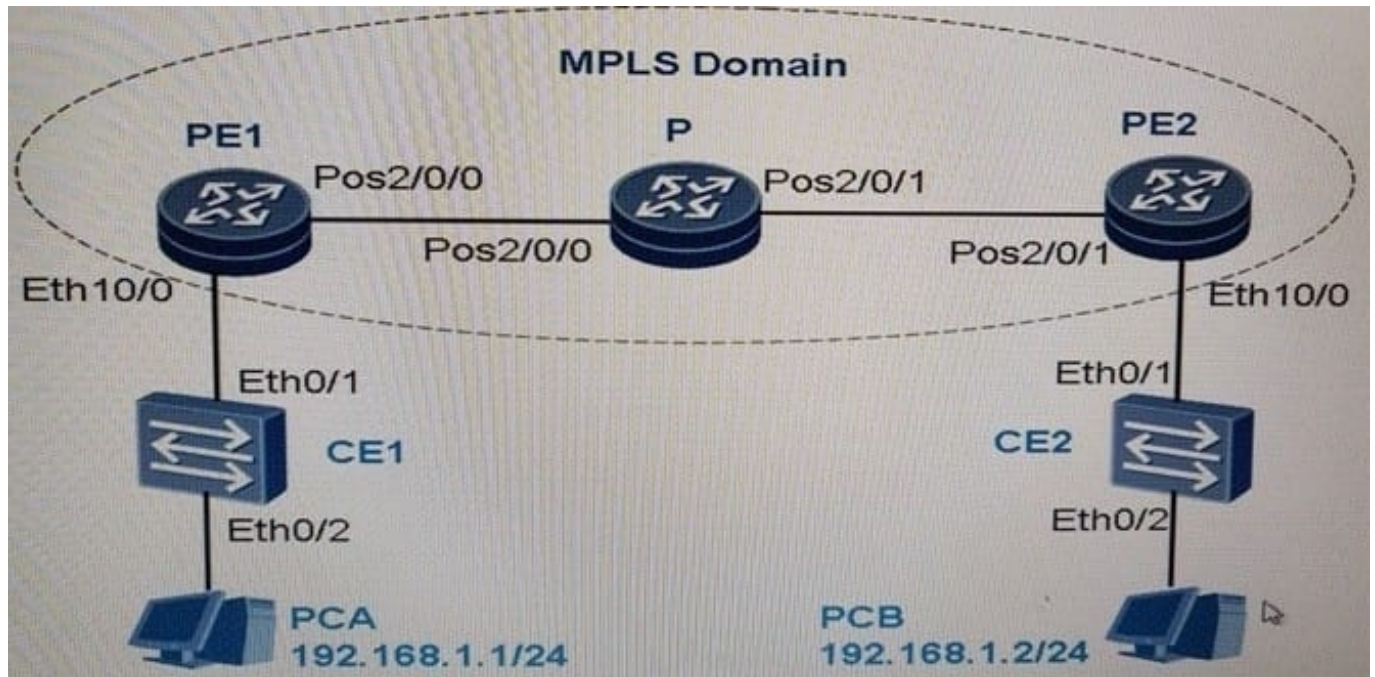

As shown in the figure, virtual private LAN service (VPLS) is enabled on routers PE 1 and PE 2. CEs are connected to PEs through QinQ and PC A and PC B are connected to the two CEs. The two PCs belong to the same VPN and can communicate with each other properly. Which of the following statements about the communication process when you ping PC B from PC A are true?

- A. PE 1 receives packets with a VLAN tag from CE 1 and adds a VLAN tag to these packets.
- B. If the penultimate hop popping (PHP) feature of MPLS is enabled on PEs, a packet received by PE 2 from a P router has two VLAN tags one MPLS label.
- C. PE 1 add two MPLS labels to a packet before sending the packet to a router.
- D. A packet received by CE 2 from PE 2 has two VLAN tags CE 2 removed the outer tag and forwards the packets to PC B based on the inner tag

Correct Answer: ABC

QUESTION 5

Which statement describes the delay variation requirement of the voice service for the IP bearer network?

- A. No strict requirement
- B. Bearer network delay variation + 1s
- C. Bearer network delay variation +100 ms, allowed maximum delay variation +200 ms
- D. Bearer network delay variation = 10 ms. Allowed maximum delay variation = 20ms

Correct Answer: D



VCE & PDF

PassApply.com

<https://www.passapply.com/h31-161.html>

2024 Latest passapply H31-161 PDF and VCE dumps Download

[Latest H31-161 Dumps](#)

[H31-161 Study Guide](#)

[H31-161 Exam Questions](#)