



# HP0-Y52<sup>Q&As</sup>

Applying HP FlexNetwork Fundamentals

## Pass HP HP0-Y52 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hp0-y52.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





## QUESTION 1

Refer to the exhibit.

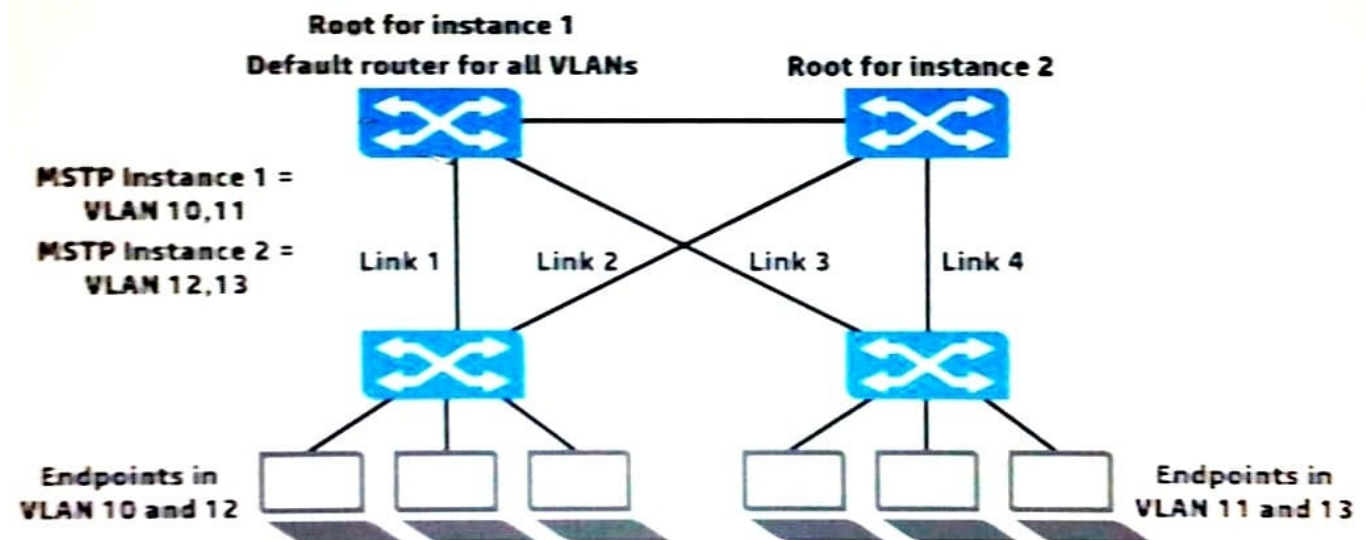

The network administrator is setting up Multiple Spanning Tree Protocol (MSTP) with the settings shown in the exhibit. All the switches are in the same region. The administrator has requested help determining which VLANs each switch-to-switch link should carry. What is a recommendation for this topology?

- A. To prevent disruptions during link failure, Links 1-4 should carry VLANs 10-13.
- B. To optimize forwarding, Links 1 and 2 should only carry VLANs 10 and 12, and Links 3 and 4 should only carry VLANs 11 and 13.
- C. To ensure compatibility with MSTP, Links 1-4 should be untagged in VLAN 1 and have no tagged VLAN assignments.
- D. To optimize forwarding, Links 1 and 3 should only carry VLANs 10 and 11, and Links 2 and 4 should only carry VLANs 12 and 13.

Correct Answer: D

## QUESTION 2

What is one difference between the 802.11g and 802.11n standards?

- A. 802.11g can operate on the 5Ghz band.
- B. 802.11n can operate on the 2.4Ghz band.
- C. 802.11n supports multiple spatial streams with MIMO.
- D. 802.11g supports channel bonding of multiple channels.

Correct Answer: C



### QUESTION 3


Which term refers to aggregated links on HP ProVision switches?

- A. smart linking
- B. meshing
- C. EtherChannels
- D. trunking

Correct Answer: D

### QUESTION 4

Refer to the exhibit.

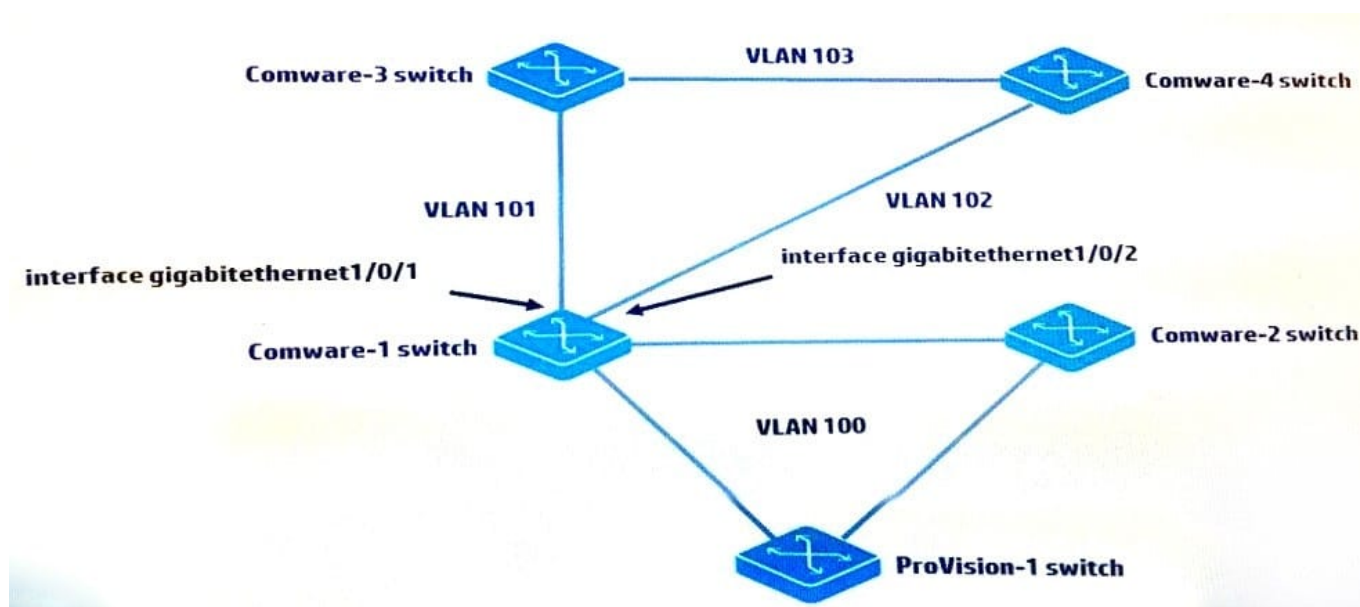

MSTP is configured on all switches shown in the exhibit. The Comware-1, Comware-3, and Comware-4 switches are set up for OSPF. Comware-1 and Comware-4 switches fail to achieve neighbor adjacency. The network administrator analyzes the issue and determines that MSTP is blocking on port gigabitethernet1/0/2 on Comware-1.

Which configuration should the administrator configure on ports g1/0/1 and g1/0/2 to allow Comware-1 to form the correct OSPF adjacencies with Comware-3 and Comware-4?

- A. interface g1/0/1 spanning-tree bpdu-filter quit  
interface g1/0/2 spanning-tree bpdu-filter quit
- B. interface g1/0/1 undo stp enable quit  
interface g1/0/2 undo stp enable quit
- C. interface g1/0/1 stp link-mode route quit  
interface g1/0/2 stp link-mode route quit



D. interface g1/0/1stp bpdu-filterquitinterface g1/0/2stp bpdu-filterquit

Correct Answer: A

---

### QUESTION 5

A network administrator enters this command on an HP Comware switch:

save

In interactive mode, the administrator is prompted to save to a file named config.cfg and confirms the save. What is the effect of these actions?

- A. The current configuration is saved to config.cfg on a TFTP server but is not used for the startup-config.
- B. The startup-config, rather than the correct configuration, is saved to config.cfg on a TFTP server.
- C. The current configuration is saved to config.cfg in the flash but is not used for the startup-config.
- D. The current configuration is saved to config.cfg in the flash and is used for the startup- config.

Correct Answer: D

[Latest HP0-Y52 Dumps](#)

[HP0-Y52 Exam Questions](#)

[HP0-Y52 Braindumps](#)