



HP0-Y52^{Q&As}

Applying HP FlexNetwork Fundamentals

Pass HP HP0-Y52 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hp0-y52.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

An HP Comware switch should send messages to an SNMP server when various events occur. What is one step in the configuration of this feature?

- A. Enable SSH on the switch, and create a user account to match settings on the SNMP server.
- B. Set the SNMPv2 read-write community string to match the string on the SNMP server.
- C. Enable logging to the console globally.
- D. Specify an SNMP trap server with the SNMP server IP address and community string.

Correct Answer: D

QUESTION 2

Where is priority information stored in an Ethernet frame?

- A. 802.1Q VLAN tag
- B. IP Precedence field
- C. DSCP field
- D. TOS tag

Correct Answer: A

QUESTION 3

A network administrator adds a new VLAN in a campus network, VLAN 120. The administrator needs to set up a DHCP scope for this VLAN. The scope will include an IP address for DHCP clients and a default gateway address. An HP Comware aggregation layer switch acts as a DHCP server for this VLANs at the access layer. The administrator configures this on the Comware switch for the new DHCP scope:

```
dhcp server ip-pool 120
  network 10.1.120.0 24
  gateway 10.1.120.254
  expired 1 day
  quit
dhcp server forbidden-ip 10.1.120.250 10.1.120.254
dhcp server ping packets 2
dhcp server ping timeout 750
```

Based on this configuration, what else must the administrator configure to make the pool available to DHCP clients that send requests in VLAN 120?

- A. dhcp vlan 120




- B. dhcp server ip pool 120vlan 120
- C. dhcp enable
- D. dhcp server vlan 120

Correct Answer: C

QUESTION 4

Refer to the exhibit.

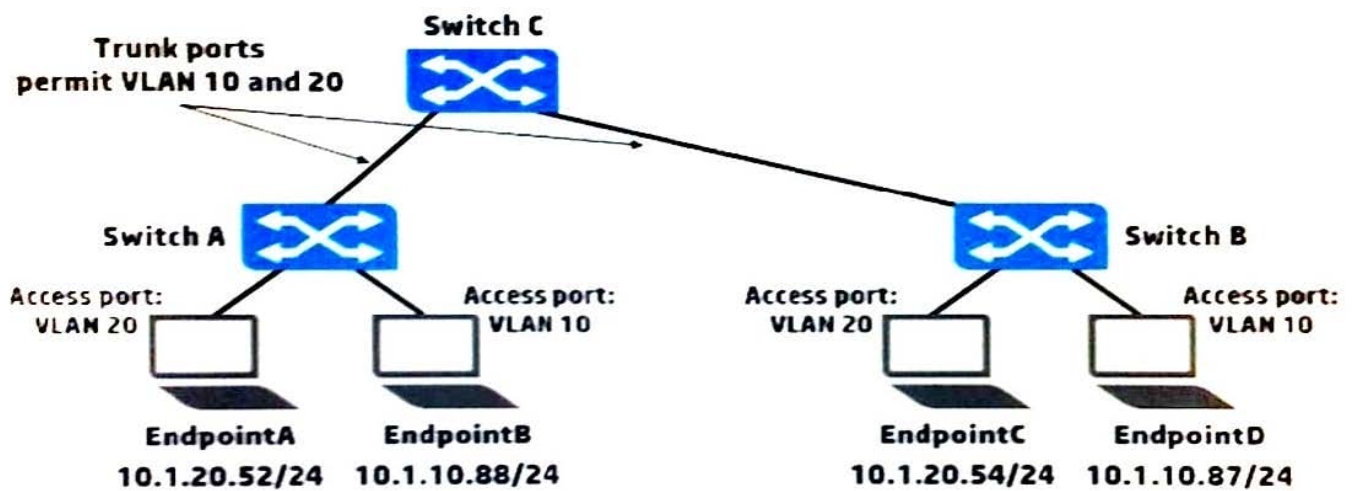

Which endpoint or endpoints receive broadcast ARP requests sent by EndpointA?

- A. EndpointB, EndpointC, and EndpointD
- B. EndpointB only
- C. EndpointB and EndpointC only
- D. EndpointC only

Correct Answer: D

QUESTION 5

When configuring Multiple Spanning Tree Protocol (MSTP), how should VLANs be separated to perform load balancing?

- A. placed into separate instances
- B. configured with different priority values
- C. never configured with more than one VLAN per instance
- D. placed into separate regions



Correct Answer: A

[HP0-Y52 PDF Dumps](#)

[HP0-Y52 VCE Dumps](#)

[HP0-Y52 Study Guide](#)