



# HP2-Z33<sup>Q&As</sup>

HP Unified Wired-Wireless Networks and BYOD

## Pass HP HP2-Z33 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hp2-z33.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers








### QUESTION 1

Refer to the exhibit.

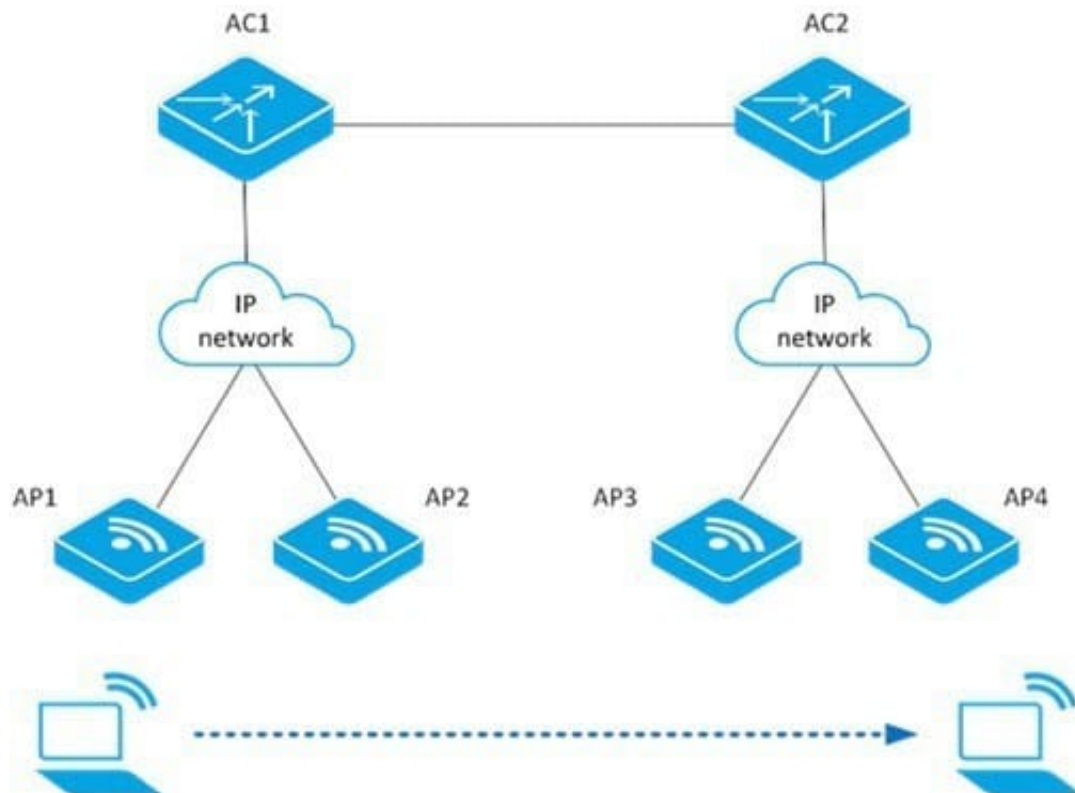

A client can roam successfully between AP1 and AP2. However, the client is unable to roam between AP2 and AP3. What could be the problem?

- A. The client is not using RSN+802.1X authentication mode.
- B. The AP2 and AP3 are not in the same mobility group.
- C. The network is using IPv6.
- D. The IACTP service has been disabled on AC1.

Correct Answer: D

### QUESTION 2

Which action does the Wireless Intrusion Prevention System (WIPS) take when it detects that a device is sending frames with a fixed initialization vector?

- A. captures the frames for future analysis
- B. logs the event
- C. deauthenticates the user





D. adds the device to the dynamic blacklist

Correct Answer: B

---

### QUESTION 3

An HP BYOD solution is deployed on a wireless infrastructure. Which components actively participate in the RADIUS authentication process of a user endpoint? (Select two)

- A. HP APs associated with an HP Unified Wireless controller in its default setup
- B. HP Wireless Service Manager (WSM)
- C. HP 830 Switch
- D. HP User Access Manager
- E. HP 830 Access Controller

Correct Answer: AD

---

### QUESTION 4

An organization's security policy mandates the use of 802.1X port based authentication. The organization's security policy also mandates that before an employee's personal device can connect to the wireless network, it must download anti-virus, security patch, and other essential software. What should be configured on the access point to support these requirements?

- A. EAP-TLS
- B. dynamic WEP
- C. portal authentication
- D. 802.1X guest VLAN

Correct Answer: D

---

### QUESTION 5

Which customer requirements would cause a WLAN designer to recommend implementing an HP Unified Wired-Wireless enterprise controller? (Select two.)

- A. The customer currently has 500 access points and an HP MSM controller deployed, and they plan to deploy an additional 400 access points.
- B. The customer expects that the number of authenticated users will increase from 1500 to 2500.
- C. The customer wants to manage their wireless network using the HP IMC platform.
- D. The customer requires high availability and seamless failover of non-centralized traffic,





E. The customer plans to deploy a new wireless network with 500 access points.

Correct Answer: CD

[Latest HP2-Z33 Dumps](#)

[HP2-Z33 Study Guide](#)

[HP2-Z33 Exam Questions](#)