



HP2-Z37^{Q&As}

Fast Track - Applying HP FlexNetwork Fundamentals

Pass HP HP2-Z37 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hp2-z37.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

What is the purpose of a management VLAN on an HP Provision switch?

- A. To prevent IP addresses from being configured on any VLANs other than the management VLAN
- B. To provide an administrative-only marker, label, or alias for the VLAN where IMC is installed
- C. To identify a specific VLAN as the only VLAN from which users can connect to the switch management interface
- D. To limit remote access connections by specifying the IP addresses that can establish connections

Correct Answer: C

QUESTION 2

Refer to the exhibit.

```
Switch-C# show spanning tree
```

```
<-output omitted->
```

```
IST Mapped VLANs      : 1-4094
Switch MAC Address    : 0019bb-acd640
Switch Priority        : 8192
Max Age               : 20
Max Hops              : 20
Forward Delay         : 15
Topology Change Count : 10
Time Since Last Change : 8 mins
CST Root MAC Address  : 0017a4-742700
CST Root Priority      : 4096
CST Root Path Cost    : 20000
CST Root Port         : Trk1
```

```
<-output omitted->
```

Port	Type	Cost	Priority	State	:	Designated Bridge
----	-----	-----	-----	-----	+	-----
1	100/1000T	20000	128	Blocking	:	001635-b65040
2	100/1000T	20000	128	Forwarding	:	0019bb-acd640
3	100/1000T	20000	128	Blocking	:	0017a4-742700
4	100/1000T	20000	120	Forwarding	:	001630-4907d1
<-output omitted->						
Trk1	100/1000T	20000	128	Forwarding	:	0017a4-742700

Based on the output in the exhibit, which statement is correct about the spanning tree protocol running in this network?

- A. Switch- is a root switch.
- B. Port 2 is a designated port.
- C. Port 3 is a root port.




D. Port 4 is a designated port.

Correct Answer: B

QUESTION 3

Refer to Exhibit.

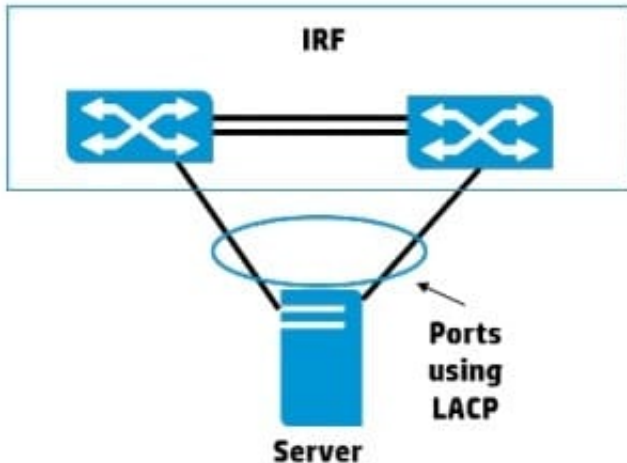

The server shown in the exhibit requires redundant links, and The link aggregation should use LACP. What should the administrator configure on the 1RF virtual switch?

- A. a bridge aggregation interface that uses static link aggregation mode
- B. a bridge aggregation interface that uses dynamic link aggregation mode
- C. two interfaces that are set to trunk for the port-link type
- D. two interfaces that are set to hybrid for the port-link type

Correct Answer: B

QUESTION 4


Which HP Comware term defines the untagged VLAN on a trunk port that is commonly used for network management traffic?

- A. default VLAN
- B. port VLAN identifier
- C. management VLAN
- D. access VLAN tag

Correct Answer: B

**QUESTION 5**

Refer to the exhibit.

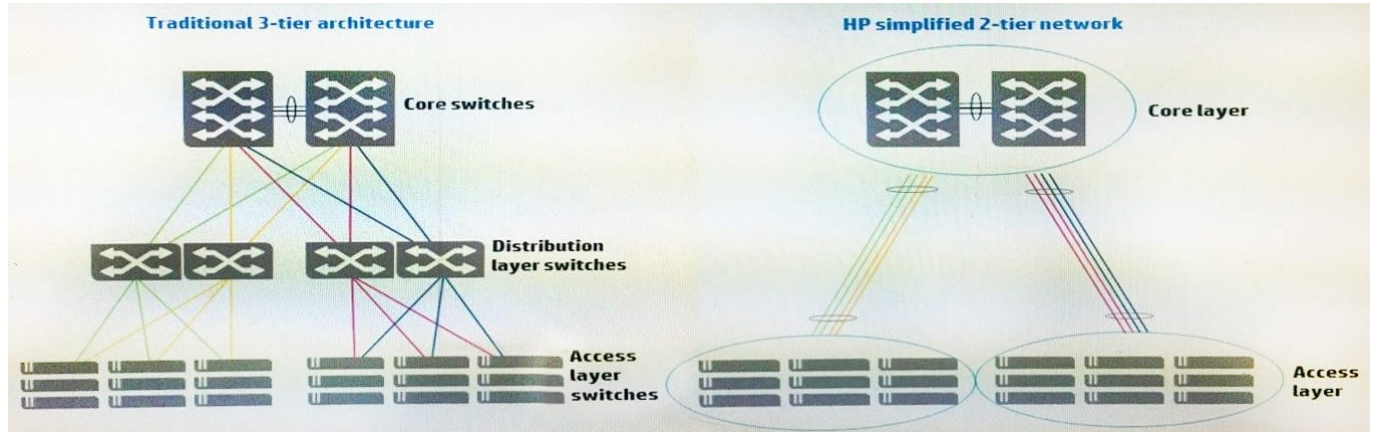

The topology shown on the left of the exhibit illustrates a traditional three-tier architecture. Which technology allows a company to simplify their network with a two-tier topology as illustrated on the right of the exhibit.

- A. Intelligent Resilient Framework
- B. Software-defined Networking
- C. Multiple Spanning Tree Protocol
- D. Equal Cost Multi-Pathing

Correct Answer: A

[HP2-Z37 VCE Dumps](#)

[HP2-Z37 Practice Test](#)

[HP2-Z37 Study Guide](#)