



# HP2-Z37<sup>Q&As</sup>

Fast Track - Applying HP FlexNetwork Fundamentals

## Pass HP HP2-Z37 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hp2-z37.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1


A network administrator needs to restrict access to the console port of an HPE Comware switch. When a user connects to the console port and opens a terminal session, the switch should prompt the user for a password. How should the administrator configure user interfaces on the Comware switch?

- A. Set the authentication mode to password on the VTY 0 15 interfaces and then set the password on the VTY 0 15 interfaces.
- B. Set the authentication mode to scheme on the VTY 0 15 interfaces and then set the password globally.
- C. Set the authentication mode to password on the AUX 0 interface and then set the password on the AUX 0 interface.
- D. Set the authentication mode to scheme on the AUX 0 interface and then set the password globally.

Correct Answer: C

### QUESTION 2

Refer to the exhibit.

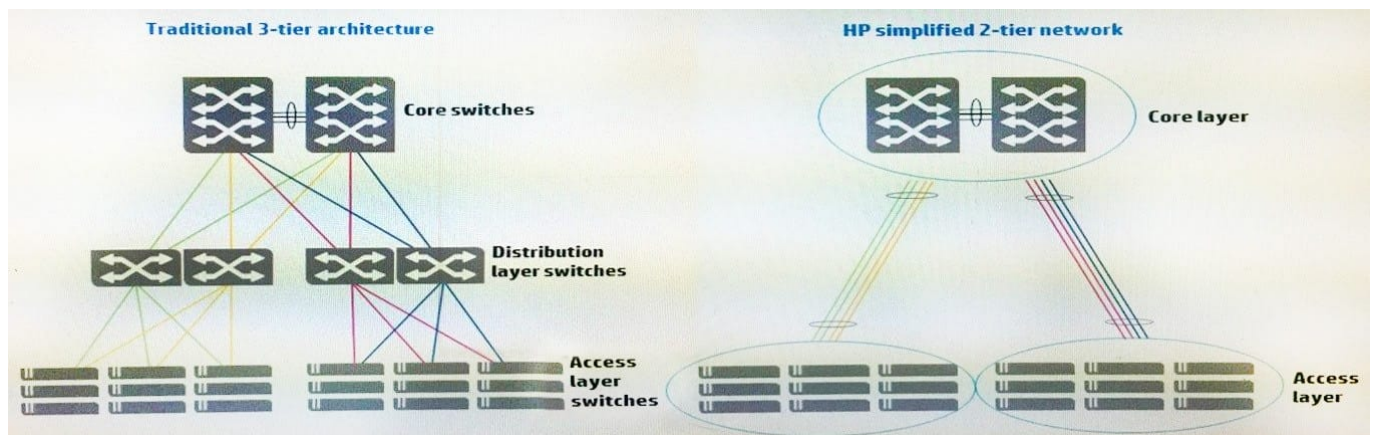

The topology shown on the left of the exhibit illustrates a traditional three-tier architecture. Which technology allows a company to simplify their network with a two-tier topology as illustrated on the right of the exhibit.

- A. Intelligent Resilient Framework
- B. Software-defined Networking
- C. Multiple Spanning Tree Protocol
- D. Equal Cost Multi-Pathing

Correct Answer: A

### QUESTION 3



Refer to the exhibit.

```
[Comware] display ip routing-table
Routing Tables: Public
Destinations : 7      Routes : 7
Destination/Mask      Proto  Pre   Cost   NextHop      Interface
10.2.0.0/17           OSPF   10    110    10.1.1.5     Vlan3
10.2.64.0/19          OSPF   10    120    10.1.1.5     Vlan3
10.2.192.0/18         OSPF   10    40     10.1.1.13    Vlan5
10.2.64.0/18          OSPF   10    130    10.1.1.13    Vlan5
10.2.128.0/17         OSPF   10    30     10.1.1.5     Vlan3
<-output omitted->
```

Examine the partial HP switch output shown in the exhibit. Based on this output, if the switch receives a packet with a destination IP address of 10.2.90.87, which entry in the routing table would the switch use to forward the packet?

- A. 10.2.128.0/17
- B. 10.2.0.0/17
- C. 10.2.64.0/19
- D. 10.2.64.0/18

Correct Answer: C

#### QUESTION 4

A tagged frame arrives on a switch port that is not a tagged member of the VLAN indicated by the frame ID. What do fundamental VLAN operating rules require the switch to do with that frame?

- A. Ignore the VLAN tag and forward the frame, based on destination MAC address.
- B. Forward a copy of the frame to the default gateway.
- C. Attempt best effort delivery by flooding a copy of the frame to all other VLANs.
- D. Drop the frame.

Correct Answer: D

#### QUESTION 5

Which HP solution provides network optimization and automated network provisioning to its customers?

- A. Intelligent Management Center NTA
- B. FlexNetwork Architecture
- C. Intelligent Resilient Framework



D. Software-defined Networking

Correct Answer: D

[Latest HP2-Z37 Dumps](#)

[HP2-Z37 Exam Questions](#)

[HP2-Z37 Braindumps](#)