



HPE0-J50^{Q&As}

Integrating Protected HPE Storage Solutions

Pass HP HPE0-J50 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hpe0-j50.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit.

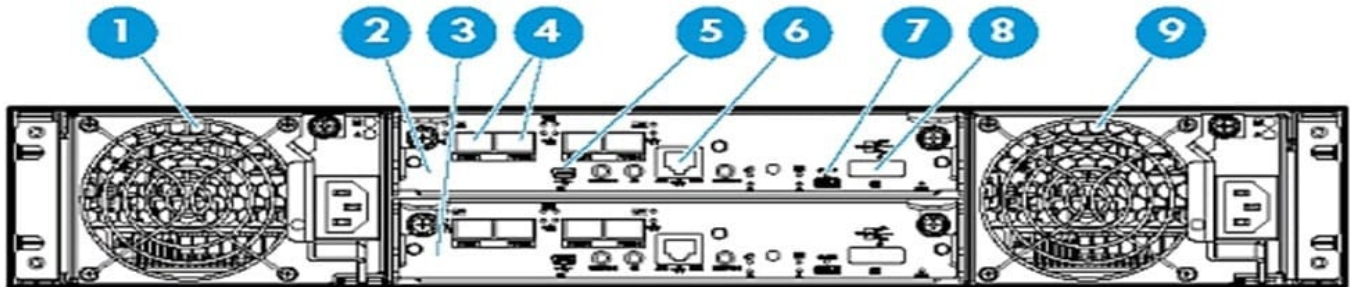

Which port can be used to connect the HPE MSA 2040 controller to hosts?

- A. 4
- B. 5
- C. 6
- D. 8

Correct Answer: A

Reference: <https://support.hpe.com/hpsc/doc/public/display?docId=c03792322> (10)

QUESTION 2

A storage integrator is creating a domain in the 3PAR StoreServ Management Console (SSMC).

Which settings of a 3PAR virtual domain have to be configured? (Choose two.)

- A. Name
- B. OpenLDAP server
- C. Active Directory Domain Controller
- D. Storage Controller
- E. Storage System

Correct Answer: AE

QUESTION 3

An HPE StoreVirtual 3200 solution specifies 802.3ad (LACP) bonding is required for the network interfaces. What must be considered when implementing this solution?



- A. Only one of the chosen network interfaces will actively pass traffic.
- B. The network interfaces chosen may operate at the different speeds.
- C. Additional switch configuration will be necessary.
- D. The network interfaces chosen must be cabled to different switches.

Correct Answer: C

HPE StoreVirtual 3200 provides three options for the teaming/bonding of the network ports on each storage controller--Active-Passive, Link Aggregation Dynamic Mode (LACP), or Adaptive Load Balancing (ALB) bonding. The simplest solution, the Active-Passive bonding, utilizes only one of the available network ports per controller. The most complex solution, the LACP (802.3ad) bonding, delivers bandwidth aggregation and redundancy across both controller network ports but requires additional switch configurations such as IRF trunking. The preferred and recommended bonding mode is ALB, where the network ports may be connected to different switches, therefore, support switch failover.

QUESTION 4

When is write throttling of HDDs invoked?

- A. to synchronize speed of writing to multiple solid-state drives combined with rotational drives
- B. to synchronize speed of writing to multiple solid-state drives
- C. when drive wearing rate will cause the drive to fail before the warranted time
- D. when the power consumption of a drive exceeds the power cap

Correct Answer: C

Reference: <https://pdfs.semanticscholar.org/c078/528cdf6369cbb01881b8795d44bf799c7490.pdf>

QUESTION 5

As a best practice, what should the Integrator do after finishing a storage solution installation?

- A. Remove and insert each hot swappable component one-by-one.
- B. Verify the used space in a rack.
- C. Test storage solution functionality under the operational temperature range.
- D. Verify the event logs are accumulating data.

Correct Answer: C