



HPE0-S58^{Q&As}

Implementing HPE Composable Infrastructure Solutions

Pass HP HPE0-S58 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hpe0-s58.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which HPE Synergy D3940 storage module configuration is valid?

- A. a single RAID set to be shared across the SAS fabric to multiple compute nodes as a virtualization host datastore
- B. maximum of three HPE Synergy D3940 storage modules per frame to be used by any compute module within the management ring
- C. any number of the drives from storage module to be mapped to any single compute node
- D. a pair of disks to house Composer backups and Synergy firmware bundles

Correct Answer: A

QUESTION 2

An integrator needs to set up three Synergy Frames. All three frames are equipped with two HPE Synergy Virtual Connect SE 40Gb F8 modules. How many frames must the integrator select in the Enclosure Group?

- A. 02 frame link modules

Correct Answer: A

Reference: <https://h20195.www2.hpe.com/v2/GetPDF.aspx/c04815258.pdf>

QUESTION 3

A customer needs a Synergy solution to meet the following requirements: Acts as a master module in a multiple frame logical fabric Provides advanced Ethernet switching features Managed by the network team Supports 10Gb downlinks to compute modules 40Gb uplinks to core switches


Which interconnect module should the integrator use?

- A. Mellanox SH2200 Switch Module
- B. HPE Synergy 10Gb/40Gb Pass-Thru Modules
- C. HPE Synergy 40Gb F8 Switch Module
- D. HPE Virtual Connect SE 40Gb F8 module for HPE Synergy

Correct Answer: D

Reference: <https://h20195.www2.hpe.com/v2/GetPDF.aspx/c04815258.pdf>

QUESTION 4

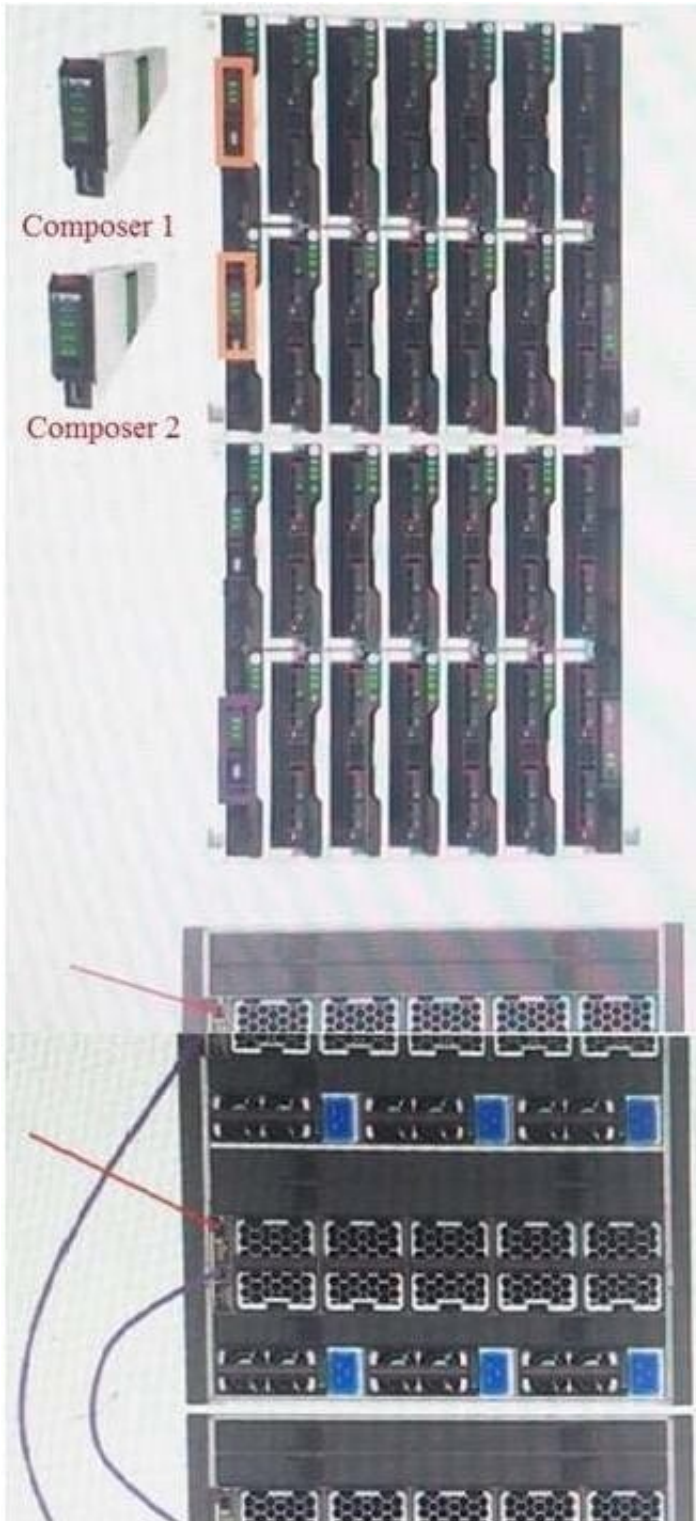

A customer has received a second frame for their HPE Synergy environment. The customer has added the second frame to the rack and correctly cabled the power and management ring. Based on the design shown, which changes need to be made to the configuration to ensure high availability? (Choose two.)

- A. Split the management uplinks across both frames
- B. Configure high availability in vCenter for the HPE OneView appliance



- C. Configure high availability on the Frame Link Modules
- D. Enable high availability in the Settings of the Composer
- E. Move one of the Composers to the second frame

Correct Answer: AC

Reference: https://h20628.www2.hp.com/km-ext/kmcsdirect/emr_na-c05348240-6.pdf

QUESTION 5

Which policy can an integrator apply when creating a datastore using HPE OneView for vCenter Server?

- A. Data at Rest encryption policy
- B. Round Robin load balancing policy
- C. Recovery Manager Central policy
- D. virtual machine Restart policy

Correct Answer: C

[Latest HPE0-S58 Dumps](#)

[HPE0-S58 PDF Dumps](#)

[HPE0-S58 Study Guide](#)