



HPE0-S58^{Q&As}

Implementing HPE Composable Infrastructure Solutions

Pass HP HPE0-S58 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hpe0-s58.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

A customer has two Synergy frames using HPE Virtual Connect and 20Gb satellite modules linked together.

What is the maximum number of frames that can be added to this configuration? (Note: Enter your answer in the answer field below.)

A. 3 (three) frames maximum

Correct Answer: A

QUESTION 2

A customer wants to remove nodes from an existing ESXi cluster using the HPE OneView for vCenter Server. What must be done before this functionality can be used?

A. The cluster must be imported to HPE OneView


B. An additional VMkernel port must be created for OneView integration

C. All local datastores must be disconnected or removed from the other cluster nodes

D. At least one node of the cluster must be placed in the maintenance mode

Correct Answer: D

QUESTION 3

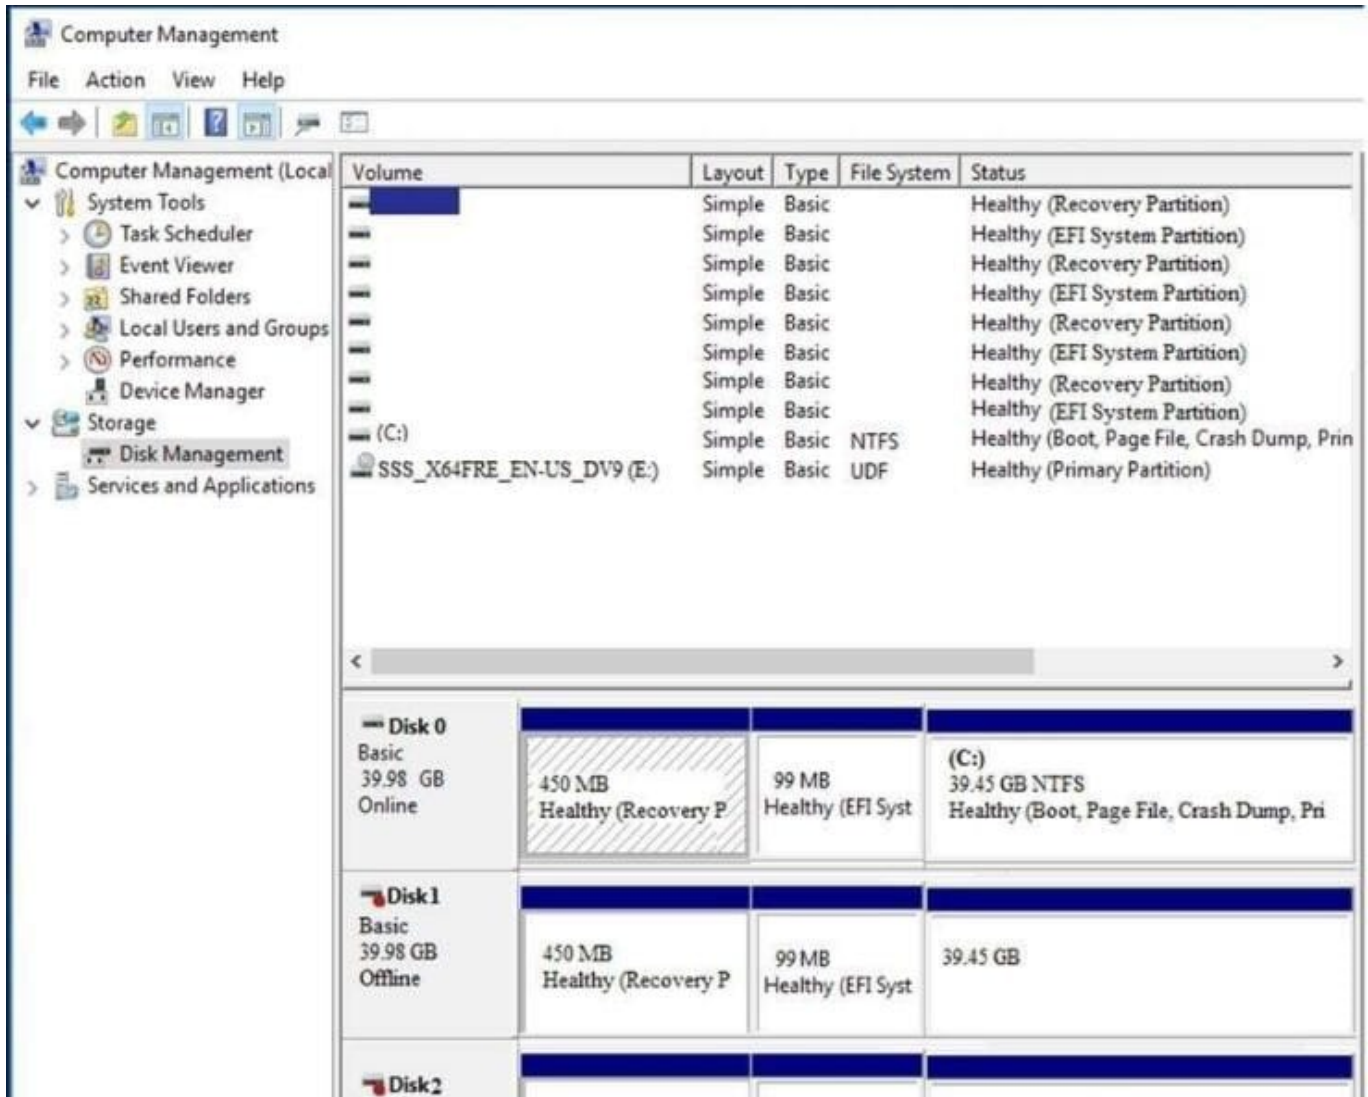

A customer connected a logical drive from 3PAR StoreServ array to the Windows Server 2016 as a data drive.

The customer complains that in the Disk Manager, they can see the same volume four times.

What can an integrator do to fix this issue?

- A. Delete any three logical drives and leave one of them
- B. Go to the SSMC and enable multipathing option for this volume
- C. Create an NTFS partition on any logical drive to consolidate the logical drives
- D. Install an MPIO component to hide redundant paths to the volume

Correct Answer: B

QUESTION 4

A customer needs to aggregate uplink ports from two Virtual Connect interconnects to increase bandwidth and



availability of the networks configured for HPE Synergy platform. Which steps must the integrator perform in the configuration to meet the customer's needs?

- A. Connect Satellite modules using Ports L1 and L4
- B. Connect Ports Q7 and Q8 on the Master interconnect Modules (ICM)
- C. Install Redundant Frame Link Modules and a second management ring
- D. Enable Intelligent Resilient Fabric (IRF) on the Virtual Connect Modules

Correct Answer: A

QUESTION 5

An integrator is performing initial configuration of three-frame Synergy solution with HPE Image Streamer. Which networks must be created for this configuration? (Choose two.)

- A. management
- B. data
- C. console
- D. deployment
- E. internal

Correct Answer: AD

[Latest HPE0-S58 Dumps](#)

[HPE0-S58 Exam Questions](#)

[HPE0-S58 Braindumps](#)