



HPE2-Z40^{Q&As}

Delta - Applying Aruba Switching Fundamentals for Mobility

Pass HP HPE2-Z40 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hpe2-z40.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which settings are required on ArubaOS switches for Aruba AirWave to discover monitor, and manage them?

- A. shared cluster key and an SNMP v2 community or v3 user
- B. SNMP v2 community or v3 user and an HTTPS certificate
- C. credentials for Telnet or SSH login and an SNMP v2 community or v3 user
- D. credentials for Telnet or SSH login and an HTTPS certificate

Correct Answer: A

QUESTION 2

An Aruba Virtual Switching Framework (VSF) fabric has 10GbE interfaces assigned to its VSF link. The network administrator wants to change the link to use 40GbE interfaces.

Which procedure follows the best practices and requirements to set up the VSF links?

- A. Shut down the standby member, remove the VSF link, and then re-create the link with only 40GbE interfaces.
- B. Add the 40GbE interfaces to the VSF link, and then remove the 10GbE interfaces from the link Create an LACP link aggregation on the 40GbE interfaces, and then add them to the VSF link.
- C. Create a second VSF link that uses the 40GbE interfaces, and then remove the first VSF link.

Correct Answer: A

QUESTION 3

A network administrator needs to configure Virtual Switching Framework (VSF) for the first time on an ArubaOS switch The administrator enters this command: Switch-1(config)# vsf member 1 link 1 a23, a24

The administrator then wants to provision member 2 settings. What must the administrator do before provisioning these settings?


- A. Configure SNMP settings that match settings configured on member 2.
- B. Enable VSF on the switch and reboot.
- C. Join member 2 to the VSF fabric.
- D. Specify the model type for member 1.

Correct Answer: C



QUESTION 4

Refer to the exhibit.

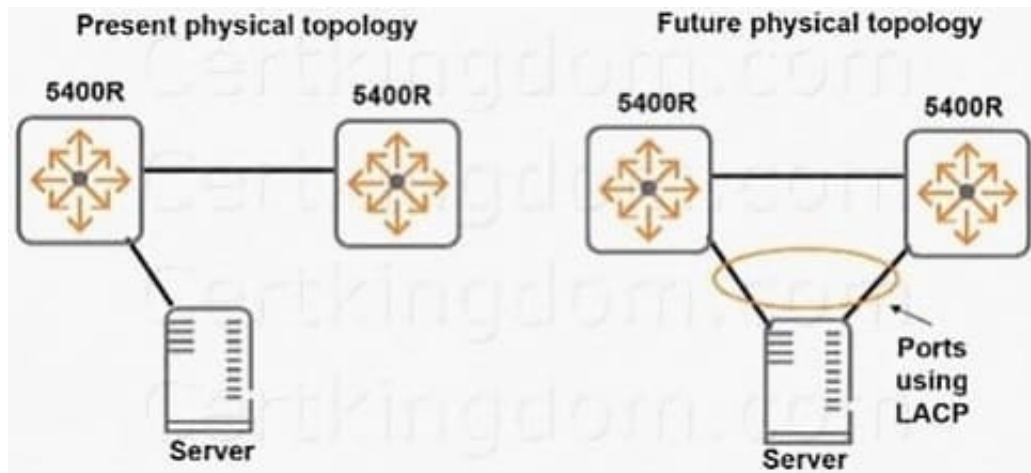

The exhibit shows the physical connection between two Aruba 5400R switches and a server. The network administrator is concerned about redundancy and wants to implement a solution like that shown on the right side of the exhibit. The administrator plans to use an LACP link aggregation with both links active. What must the administrator do first?

- A. Configure an LACP link aggregation between the switches.
- B. Enable dynamic link aggregation globally on the switches.
- C. Combine the switches into a Virtual Switching Framework (VSF) fabric.
- D. Configure the same operational key on both the switches.

Correct Answer: B

QUESTION 5

A company wants to use Zero Touch Provisioning (ZTP) to provision new ArubaOS switches. Which AirWave settings must match the switch default SNMP and Telnet/SSH password settings?

- A. Credentials in device discovery settings
- B. Communication settings for the device group to which ZTP switches are assigned
- C. Settings in the device template for the device group to which ZTP switches are assigned
- D. Global communication settings

Correct Answer: C

[Latest HPE2-Z40 Dumps](#)

[HPE2-Z40 PDF Dumps](#)

[HPE2-Z40 Practice Test](#)