



HPE2-Z40^{Q&As}

Delta - Applying Aruba Switching Fundamentals for Mobility

Pass HP HPE2-Z40 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hpe2-z40.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

A company wants to use Zero Touch Provisioning (ZTP) to provision new ArubaOS switches. Which AirWave settings must match the switch default SNMP and Telnet/SSH password settings?

- A. Credentials in device discovery settings
- B. Communication settings for the device group to which ZTP switches are assigned
- C. Settings in the device template for the device group to which ZTP switches are assigned
- D. Global communication settings

Correct Answer: C

QUESTION 2

Refer to the exhibit.

The screenshot shows the Aruba AirWave interface. At the top, there are 'Device Actions' buttons: 'Management Level' (dropdown), 'Monitor Only + Firmware Upgrades', and 'Manage Read/Write'. Below this is a table with columns: DEVICE, STATUS, CONFIGURATION, and CONTROLLER. The table contains three rows of devices, all with a status of 'Up' and configuration of 'Mismatched'. The controller for the first two is '-' and for the third is 'ATPNL-Ss-IAPs'. A watermark 'getkingdom.com' is visible across the table.

DEVICE	STATUS	CONFIGURATION	CONTROLLER
ATPNL-Ss-IAPs	Up	Mismatched	-
IAP-North *	Up	Mismatched	ATPNL-Ss-IAPs
IAP-South	Up	Mismatched	ATPNL-Ss-IAPs


An Aruba Instant cluster is added in Aruba AirWave. A network administrator needs to change the cluster management level to Manage Read/Write. The exhibit shows the current status for the cluster. What should the administrator do before changing the management level?

- A. Determine why AirWave cannot contact the cluster and resolve any connectivity issues in the network.
- B. Check the cluster SNMP credentials and resolve the mismatch between the cluster credentials and AirWave credentials.
- C. Investigate why the cluster configuration does not match the group configuration template and resolve any issues.
- D. Verify that the cluster is configured with the same shared key that is configured in the global AirWave settings.

Correct Answer: D

QUESTION 3

Refer to the exhibit.

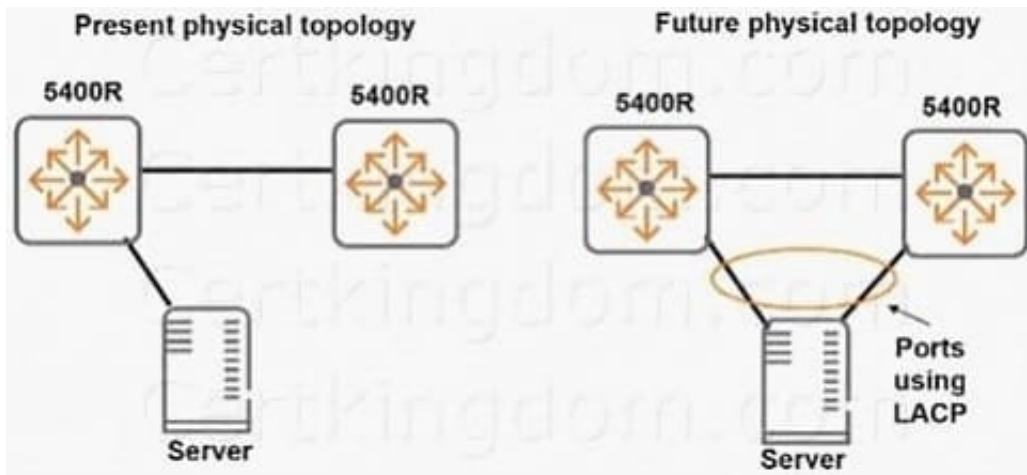

The exhibit shows the physical connection between two Aruba 5400R switches and a server. The network administrator is concerned about redundancy and wants to implement a solution like that shown on the right side of the exhibit. The administrator plans to use an LACP link aggregation with both links active. What must the administrator do first?

- A. Configure an LACP link aggregation between the switches.
- B. Enable dynamic link aggregation globally on the switches.
- C. Combine the switches into a Virtual Switching Framework (VSF) fabric.
- D. Configure the same operational key on both the switches.

Correct Answer: B

QUESTION 4

A network has ArubaOS switches and an Aruba Instant cluster with IP addresses on 10.1.255.0/24. The network administrator wants to manage the devices in Aruba Airwave. The administrator uses the SNMP credentials configured on the switches to create a scan set for 10.1.255.0/24. The scan discovers the switches but not the Instant cluster.

What should the administrator do to discover the cluster in Airwave?

- A. Configure SNMP credentials in the Instant UI.
- B. Re-configure the scan set to use the Aruba Instant default SNMIPv3 user, admin.
- C. Specify the AirWave IP address in the Instant UI System > Admin settings.
- D. Install the Instant cluster self-signed certificate on Airwave.

Correct Answer: B

QUESTION 5

Refer to the exhibit.



The exhibit shows settings for a WLAN on an Aruba Instant cluster To which VLAN is wireless user traffic assigned?

- A. to the untagged VLAN on switch ports connected to the Instant APs
- B. to the VLAN defined for wireless users in Aruba AirWave
- C. to the default VLAN defined in the System settings in the Instant
- D. to the default VLAN on switches connected to the Instant APs

Correct Answer: D

[HPE2-Z40 PDF Dumps](#)

[HPE2-Z40 Study Guide](#)

[HPE2-Z40 Exam Questions](#)