HPE2-Z40^{Q&As}

Delta - Applying Aruba Switching Fundamentals for Mobility

Pass HP HPE2-Z40 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/hpe2-z40.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

QUESTION 1

A network has ArubaOS switches and an Aruba Instant cluster with IP addresses on 10.1.255.0/24. The network administrator wants to manage the devices in Aruba Airwave. The administrator uses the SNMP credentials configured on the switches to create a scan set for 10.1.255.0/24. The scan discovers the switches but not the Instant cluster.

What should the administrator do to discover the cluster in Airwave?

A. Configure SNMP credentials in the Instant UI.

B. Re-configure the scan set to use the Aruba Instant default SNIVIPv3 user, admin.

C. Specify the AirWave IP address in the Instant UI System> Admin settings.

D. Install the Instant cluster self-signed certificate on Airwave.

Correct Answer: B

QUESTION 2

What do all devices in the same AirWave folder have in common?

A. They share firmware auditing settings.

B. They are viewed together in the APs/Devices page

C. They share a configuration template.

D. They have the same monitoring settings, such as polling settings.

Correct Answer: C

QUESTION 3

A company wants to use Zero Touch Provisioning (ZTP) to prov1s1on new ArubaOS switches. Which AirWave settings must match the switch default SNMP and Telnet/SSH password settings?

A. Credentials in device discovery settings

B. Communication settings for the device group to which ZTP switches are assigned

C. Settings in the device template for the device group to which ZTP switches are assigned

D. Global communication settings

Correct Answer: C

QUESTION 4

A network administrator configures LLDP-MAD on an Aruba Virtual Switching Framework (VSF) fabric The administrator needs to enter an SNMP community string after v2c in this command: Swich(config)# vsf lldp-mad ipv4 10.1.0.2 v2c

Which SNMP community string should the administrator enter?

A. one configured for the VSF fabric on AirWave.

B. one configured on the device at 10.1.0.2.

C. one configured on the standby member in the fabric.

D. one configured on the VSF fabric as a whole.

Correct Answer: C
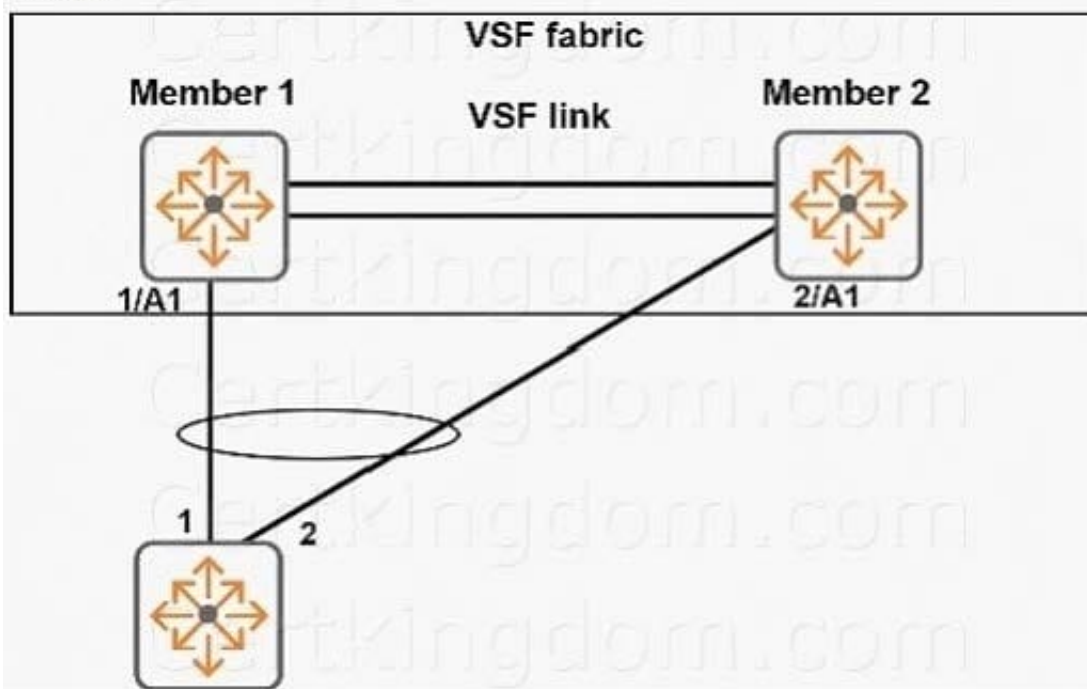

QUESTION 5

Refer to the exhibit.

Exhibit 1

Which type of link aggregation should the network administrator configure on interfaces 1/A1 and 2/A1?

A. a protocol-less trunk

B. an LACP distributed trunk

C. a distributed trunk

D. a static LACP link aggregation

Correct Answer: A