



HPE6-A42^{Q&As}

Implementing Aruba WLAN (IAW) 8

Pass HP HPE6-A42 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hpe6-a42.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center


- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibit.

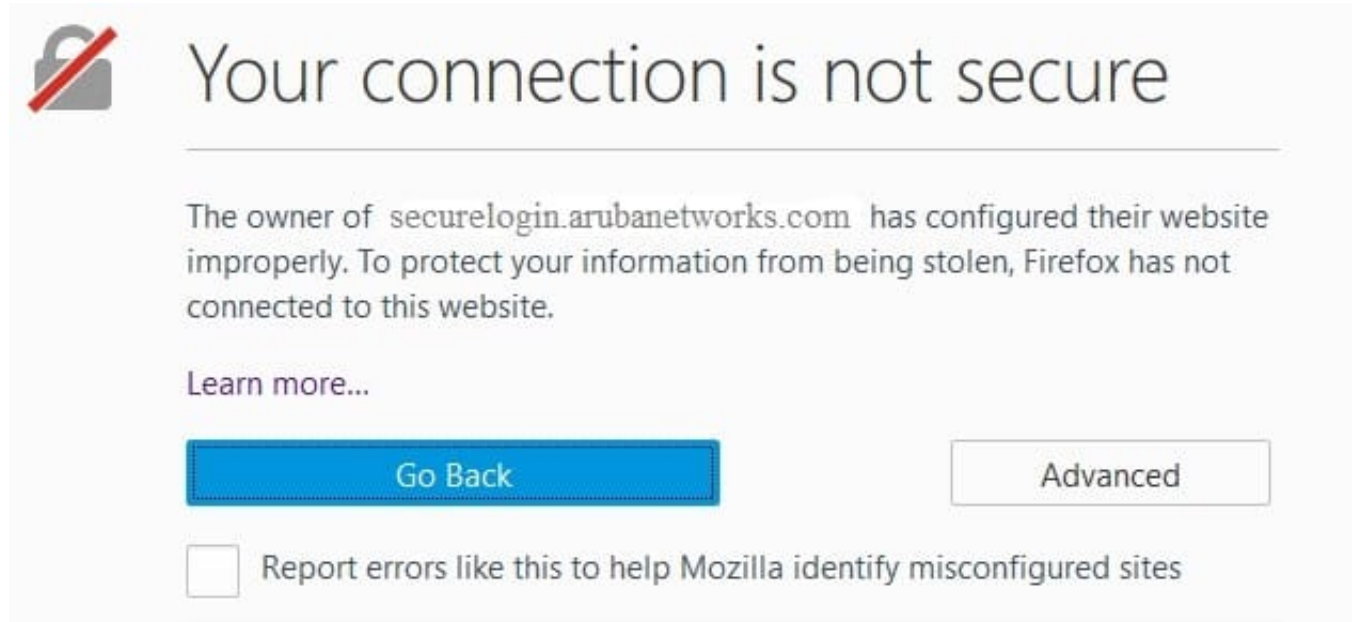

A company has a Mobility Master (MM)-based solution with a guest WLAN. During the captive portal redirection, users who access a non-HTTPS Website see the error shown in the exhibit.

How can a network administrator prevent this error?

- A. Enable automatic CPSec certificate deployment.
- B. Replace the default Mobility Master certificate with a certificate that has the correct hostname.
- C. Replace the default server certificate for mobility controllers with a certificate signed by a trusted CA.
- D. Reconfigure the guest WLAN to use EAP methods that rely on passwords rather than certificates.

Correct Answer: C

QUESTION 2

Refer to the exhibit.



Create a new server

☒ Radius ☐ LDAP

Name:

IP address:

Auth port:

Accounting port:

Shared key:

Retype key:

Timeout:

A network administrator needs to specify a RADIUS server for an employee WLAN on an Aruba solution. What must the administrator enter in the Shared key field?

- A. the password defined as the preshared key for the WLAN on the Mobility Master (MM) and on authorized wireless clients
- B. the password configured in a user account with administrative rights on the RADIUS server
- C. the password configured for RADIUS clients on the RADIUS server
- D. the password defined for authorized wireless clients on the RADIUS server and also distributed to authorized wireless clients

Correct Answer: A

QUESTION 3

A company has an Aruba Mobility Master (MM)-based solution that runs ArubaOS 8 and uses the default AirMatch and Client Match settings. The ARM profile has been disabled for 5GHz radios. How are channel and transmit power settings managed for these radios?

- A. with legacy ARM
- B. with Rule Based Client Match
- C. with legacy Client Match
- D. with AirMatch

Correct Answer: D



QUESTION 4

How does WPA2 protect wireless user traffic in the air?

- A. It provides data integrity with AES and no data privacy.
- B. It provides both data integrity and privacy with AES.
- C. It provides data privacy with TKIP and no data integrity.
- D. It provides data integrity with TKIP and data privacy with AES.

Correct Answer: D

QUESTION 5

What is one difference between how a network administrator can monitor clients in the Mobility (MM) interface and in the AirWave Management Platform?

- A. AirWave shows trends for the past several minutes, while MM shows longer trends.
- B. AirWave combines information from more sources, such as RADIUS authenticating servers and APs.
- C. AirWave shows the current signal level for the client connection, while MM does not show RF statistics.
- D. MM shows user and role information associated with clients, while AirWave does not.

Correct Answer: B

[HPE6-A42 VCE Dumps](#)

[HPE6-A42 Practice Test](#)

[HPE6-A42 Study Guide](#)