HPE6-A44^{Q&As}

Scalable WLAN Design and Implementation (SWDI) 8

Pass HP HPE6-A44 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/hpe6-a44.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

QUESTION 1

An administrator creates a cluster of four Mobility Controllers (MCs). When the administrator verifies the cluster operation, the administrator notices that it is operating as an L3-connected cluster.

What should the administrator do to ensure that the cluster operates as an L2-connected cluster? (Choose two.)

A. Include all IP addresses in the same subnets shared by the Mobility Controllers.

B. Exclude all VLANs that are not trunked to each Mobility Controller.

C. Verify VLAN configuration on the switch trunks that interconnects the Mobility Controllers.

D. Configure a separate VRRP group for each cluster member.

E. Ensure that the controller IP addresses are in the same subnet.

Correct Answer: BE

QUESTION 2

In a VPN that uses certificate-based authentication, which component must be configured on the Mobility Master (MM) to allow a RAP to successfully connect to a Mobility Controller (MC)?

A. RAP VPN username and password

B. WLAN and new RAP group

C. RAP IPSec pre-shared key

D. RAP whitelist

Correct Answer: D

QUESTION 3

An administrator configures an ArubaOS switch for per-user tunneled node. Which protocol does the switch use to communicate with the Aruba Mobility Controller (MC)?
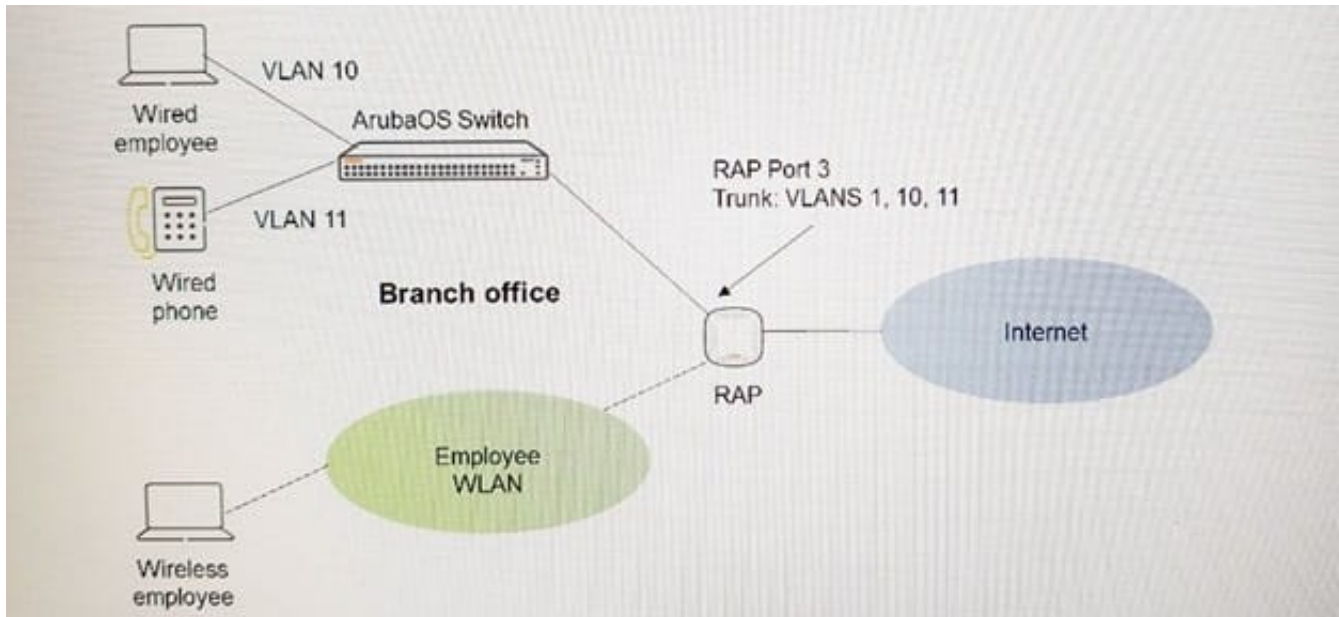
A. GRE

B. SSL

C. PAPI

D. IPSec

Correct Answer: A

QUESTION 4

Refer to the exhibit.

An administrator configures a policy for an AP Group. Port 3 of a RAP is a trunk that connects to a switch

at a branch office. VLAN 1 is untagged and VLANs 10 (for data) and 11 (for voice) are tagged. The

administrator applies an ACL inbound on Port 3 of the RAP.

How does this configuration affect traffic on Port 3?

A. It filters traffic from VLAN 10 and 11, but allows traffic from VLAN1.

B. It filters traffic form VLAN 1, but allows traffic from VLANs 10 and 11.

C. It allows all traffic form VLANs 1, 10, and 11.

D. It filters traffic from VLANs 1, 10, and 11.

Correct Answer: A

QUESTION 5

An administrator needs to modify a VAP used for a branch office RAP. The VAP\\'s operating mode is currently defined as backup and uses tunnel mode forwarding. The administrator wants to implement split-tunnel forwarding mode in the VAP.

Which WLAN operating mode must the administrator define for the VAP before the tunnel forwarding mode can be changed to split-tunnel?

A. Persistent

B. Standard

C. Trusted

D. Always

Correct Answer: B