



HPE6-A66^{Q&As}

Aruba Certified Design Associate Exam

Pass HP HPE6-A66 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hpe6-a66.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

A company needs an upgrade of its access layer switches. The solution requires that devices connected to the access layer be authenticated and their traffic processed by the firewall features of the Aruba Mobility Controllers. Which solution should the company implement?

- A. PAPI mobility
- B. Dynamic segmentation
- C. iPsec tunneling
- D. GRE tunneling

Correct Answer: C

QUESTION 2

A network architect is designing a new Wi-Fi solution for a customer. The customer currently occupies a one-story building on a small campus. In one part of the building there is an auditorium, where the ceiling height and attenuation is different from the rest of the building. What should the network architect create in VisualRF to identify this difference when planning the APs?


- A. Define the appropriate properties in the Network View
- B. Create a Region in the Floorplan View
- C. Split the Building View into two Floorplan Views
- D. Define the appropriate properties in the Building View

Correct Answer: D

QUESTION 3

NewStellar has a main corporate campus in a business park with two adjacent buildings that are 150 feet apart (46 meters). This is an open campus with no obstructions between the two buildings. Each building has three floors and each floor is 322 x 175 feet (98 x 53 meters) for 56,350 square feet (5,235 square meters) total, which results in a total of 338,100 feet (31,410 square meters) for the entire building space. The ceiling for each floor is 12 feet (3.6 meters) high with a drop

the attached exhibit.

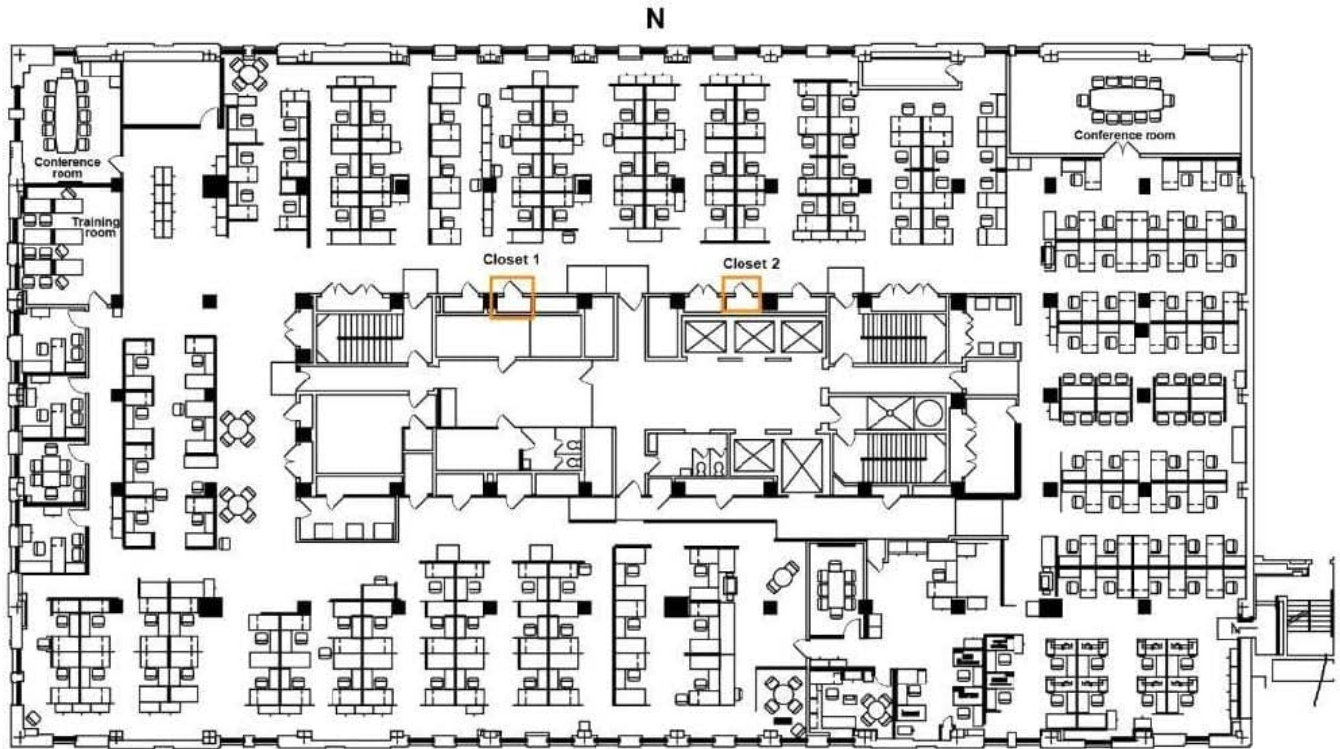

This floor has a central main corridor with washrooms, stairs, elevators and supply, and network cabinets. There are cubicles around the perimeter of the floor. The central part main corridor's dimensions contain 9,350 square feet (870 square meters). The company has determined that Wi-Fi coverage will not include the central area of each floor, which includes the washrooms, stairs, elevators and supply and network cabinets. Based on a capacity design, approximately how many APs should a network architect add to each floor to plan the design in VisuaiRF?

- A. 40
- B. 10
- C. 20
- D. 30

Correct Answer: C

QUESTION 4

A network architect has developed a design for a new Aruba Wi-Fi network that will include a hardware Mobility Master (MM) running the ArubaOS 8.4 operating system that will manage:

Two clustered 7205 controllers with 300 campus APs Two clustered VMC-50 controllers with 75 remote APs

The architect plans on creating user roles, firewall policies, and wireless IPS policies on the controllers as well as implementing AirMatch.

What would meet the license requirements for this scenario?

- A. LIC-MC-VA-50 (X2), LIC-AP (375), PEF (X375), RFP (X375)



B. LIC-MC-VA-50 (x1), LIC-AP (300), PEF (X300). RFP (x300)

C. LIC-MM-VA-50, LIC-MC-VA-50 (X1), LIC-AP (X300), PEF