



JN0-1302^{Q&As}

Data Center Design Specialist (JNCDS-DC)

Pass Juniper JN0-1302 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-1302.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers





QUESTION 1

You must implement high availability features in the design for a data center. Every network device in this design will have dual routing engines.

In this scenario, which two high availability features should you use? (Choose two.)

- A. GRES with NSR
- B. GRES with NSB
- C. NSR with graceful restart
- D. NSR with NSB

Correct Answer: AB

QUESTION 2

You are designing an EVPN/VXLAN network and want to ensure that latency between VMs on the same host is as low as possible for both Layer2 and Layer3 traffic.

Which two design choices will accomplish this task? (Choose two.)

- A. Configure spine nodes as VXLAN Layer 3 gateways.
- B. Configure leaf nodes as VXLAN Layer 2 gateways.
- C. Configure leaf nodes as VXLAN Layer 3 gateways.
- D. Configure spine nodes as VXLAN Layer 2 gateways.

Correct Answer: AB


QUESTION 3

Which two scripting languages are supported for creating on-box scripts? (Choose two.)

- A. Python
- B. Chef
- C. SLAX
- D. Ansible

Correct Answer: AC

QUESTION 4

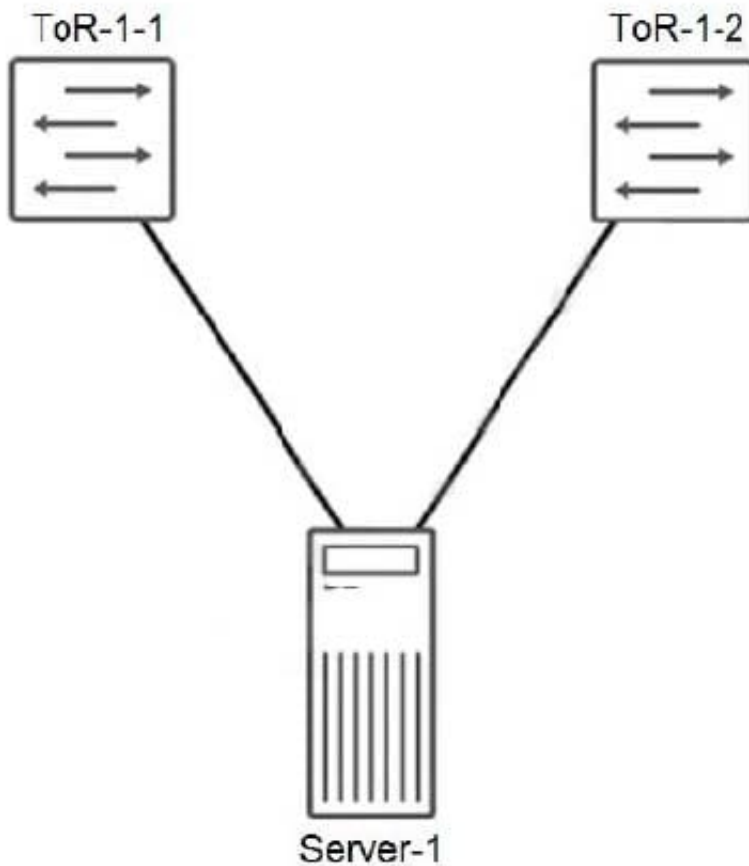

You are designing a data center where all your servers in each rack will be connected to two top-of-rack (ToR) switches using Layer 2, as shown in the exhibit. You must implement a high availability solution that maintains link layer connectivity to each server when one of the ToR switches fails.

In this scenario, which solution will accomplish this task?

- A. VRRP
- B. LAG
- C. GRE with NSB
- D. MC-LAG

Correct Answer: D

QUESTION 5

You are designing a Layer 3 Clos fabric architecture for a new data center network infrastructure. You use IBGP for the underlay control plane of the fabric.

Which devices must support BGP route reflection and BGP ADD-PATH?

- A. spine nodes



B. leaf nodes

C. fabric interconnect routers

D. fabric perimeter routers

Correct Answer: A

[JN0-1302 Study Guide](#)

[JN0-1302 Exam Questions](#)

[JN0-1302 Braindumps](#)