



JN0-347^{Q&As}

Enterprise Routing and Switching, Specialist (JNCIS-ENT)

Pass Juniper JN0-347 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-347.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

You have deployed a Juniper EX Series switch in the network. The switch receives a broadcast frame on an interface.

Which statement describes the behavior of the switch?

- A. The frame is flooded out all ports that are part of the same VLAN as the receiving port, except for the port on which the frame was received.
- B. The frame is flooded out all ports in all VLANs configured on the switch.
- C. The frame is re-transmitted as a multicast frame on all ports on the switch.
- D. The frame is flooded out all ports that are part of the same VLAN as the receiving port, including the port on which the frame was received.

Correct Answer: A

QUESTION 2

Click the Exhibit button.

```
member:0]
user@host> show virtual-chassis status brief

Preprovisioned Virtual Chassis
Virtual Chassis ID: 4459.3006.09ee
Virtual Chassis Mode: Mixed
```

Mem ber	ID	Status	Serial No	Model	Mstr prio	Role	Mixed Mode	Route Mode	Neig hbor ID	List Interface
0	(FPC 0)	Prsent	BP023201555	ex4200-48s	129	Master*	Y	VC	5	vcp-255/1/0
1	(FPC 1)	Prsent	BP023201555	ex4200-48s	0	Linecard	Y	VC	0	vcp-255/1/0
2	(FPC 2)	Prsent	BP023201555	ex4200-48s	0	Linecard	Y	VC	1	vcp-255/1/0
3	(FPC 3)	Prsent	BP023201555	ex4200-48s	0	Linecard	Y	VC	2	vcp-255/1/0
4	(FPC 4)	Prsent	BP023201555	ex4200-48s	129	Backup	Y	VC	4	vcp-255/1/1
5	(FPC 5)	Prsent	BP023201555	ex4200-48s	0	Linecard	Y	VC	4	vcp-255/1/0
									0	vcp-255/1/1

You have an existing Virtual Chassis consisting of five member devices. Member 3 fails and must be replaced. You remove the EX Series switch with a Member ID and install a replacement switch in its place using identical cabling as shown in the exhibit. The replacement's member ID is 6, so the configuration for member ID 3 is not applied to it. Referring to the exhibit, what should have been done before installing the replacement switch?


- A. Reactivate the Virtual Chassis.
- B. Recycle the member ID of the switch being replaced.
- C. Renumber the member IDs.
- D. Clear the Virtual Chassis protocol.



Correct Answer: B

QUESTION 3

Click the Exhibit button. Referring to the exhibit, what does the asterisk (*) indicate?

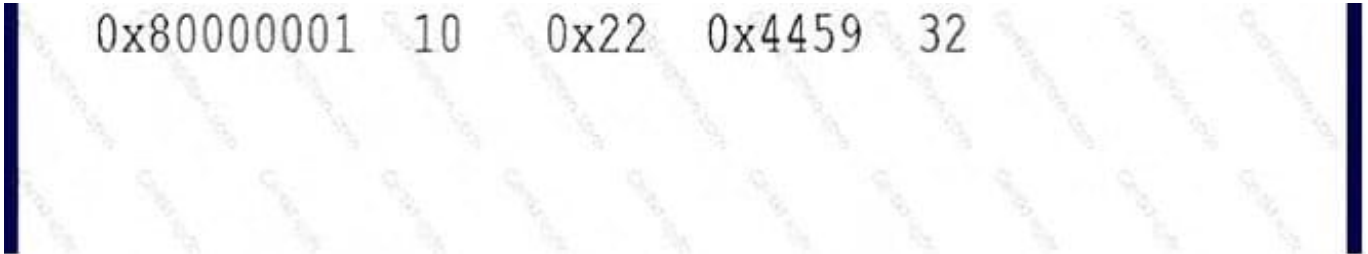

- A. The router received this entry.
- B. This entry is stale.
- C. This entry is new.
- D. The router originated this entry.

Correct Answer: C

The asterisk (*) next to one of the block entries corresponds to the active route that is used for new traffic. The term '\\new traffic\\' corresponds to a single packet or an entire flow to a destination, depending on the type of switching configured.

QUESTION 4

Which two values are used to generate a bridge ID when using STP? (Choose two.)

- A. system MAC address
- B. bridge priority
- C. port identifier
- D. loopback IP address

Correct Answer: AB

QUESTION 5

Which three BGP attributes are well-known and mandatory? (Choose three.)

- A. AS Path
- B. Next Hop



C. MED

D. Local Preference

E. Origin

Correct Answer: ABE

[JN0-347 Practice Test](#)

[JN0-347 Study Guide](#)

[JN0-347 Exam Questions](#)