



# JN0-348<sup>Q&As</sup>

Enterprise Routing and Switching, Specialist

## Pass Juniper JN0-348 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-348.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

What are two interarea OSPF LSA types? (Choose two.)

- A. Type 1 router LSAs
- B. Type 3 summary LSAs
- C. Type 4 ASBR summary LSAs
- D. Type 2 network LSAs

Correct Answer: BC

---

### QUESTION 2


Which statement is true about Layer 2 firewall filters on EX Series switches?

- A. They are stateful and evaluated by the forwarding plane.
- B. They are stateless and evaluated by the control plane.
- C. They are stateful and evaluated by the control plane.
- D. They are stateless and evaluated by the forwarding plane.

Correct Answer: D

---

### QUESTION 3

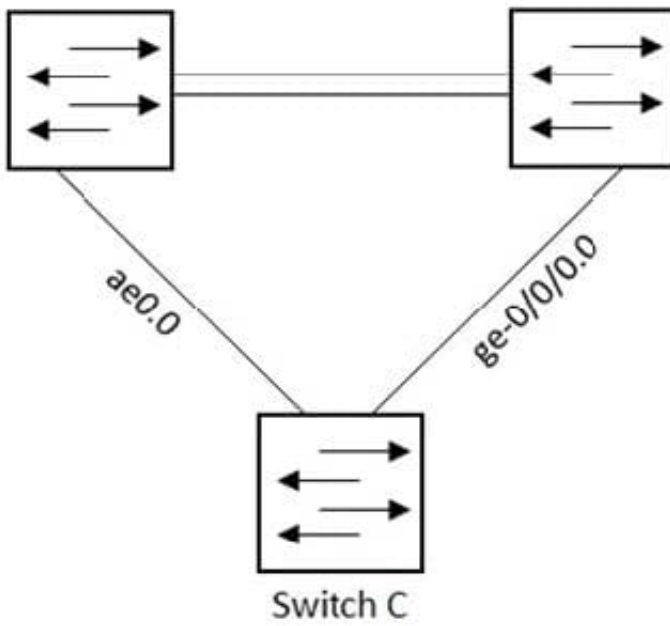

Referring to the exhibit, which configuration will force traffic to always use ae0.0 as long as it is active?



- A.
- ```
user@switchC# show switch-options
redundant-trunk-group {
  group rtg1 {
    interface ge-0/0/0.0;
    interface ae0.0 {
      minimum-links 2;
    }
  }
}
```
- B.
- ```
user@switchC# show switch-options
redundant-trunk-group {
  group rtg1 {
    interface ge-0/0/0.0 {
      priority200;
    }
    interface ae0.0 {
      priority 254;
    }
  }
}
```
- C.
- ```
user@switchC# show switch-options
redundant-trunk-group {
  group rtg1 {
    interface ge-0/0/0.0;
    interface ae0.0 {
      primary;
    }
  }
}
```
- D.
- ```
user@switchC# show switch-options
redundant-trunk-group {
  group rtg1 {
    interface ge-0/0/0.0 {
      track {
        interface ae0.0;
      }
    }
    interface ae0.0;
  }
}
```

A. B. C. D.

Correct Answer: C



#### QUESTION 4

You want to configure your Junos device so that routing information from certain prefixes on a neighboring router are ignored.

What should you configure on your device?

- A. It interface
- B. firewall rule
- C. martian address
- D. vt interface

Correct Answer: C

---

#### QUESTION 5

Click the Exhibit button.



```

user@router> show route 11.0.0/24
inet.0: 128 destinations, 173 routes (128 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

11.0.0.102/32      * [IS-IS/18] 3w0d 01:23:29, metric 15
                  to 11.101.102.2 via ge-0/0/5.0
                  > to 11.111.112.2 via ge-0/0/6.0
11.0.0.108/32      * [IS-IS/18] 3w0d 01:23:29, metric 65
                  > to 11.101.102.2 via ge-0/0/5.0
                  to 11.111.112.2 via ge-0/0/6.0
11.0.0.109/32      * [IS-IS/18] 3w0d 01:23:19, metric 75
                  > to 11.101.102.2 via ge-0/0/5.0
                  to 11.111.112.2 via ge-0/0/6.0
11.0.0.199/32      * [IS-IS/18] 3w0d 01:23:16, metric 65545
                  > to 11.101.105.2 via ge-0/1/1.0

user@router> show route forwarding-table
Routing table: default.inet
Internet:

Destination          Type RtRef Next hop          Type Index  NhRef Netif
11.0.0.102/32        user   1          11.111.112.2         ucst   699     6 ge-
0/0/6.0
11.0.0.108/32        user   0          11.101.102.2         ucst   698     6 ge-
0/0/5.0
                    11.111.112.2         ucst   699     6 ge-
0/0/6.0
11.0.0.109/32        user   0          11.101.102.2         ucst   698     6 ge-
0/0/5.0

```

Referring to the output shown in the exhibit, which statement is correct?

- A. 11.0.0.108/32 is being per-flow load-balanced
- B. 11.0.0.102/32 is being per-packet load-balanced
- C. 11.0.0.102/32 is being per-flow load-balanced
- D. 11.0.0.108/32 is being per-packet load-balanced

Correct Answer: D