JN0-362 Q&As

Service Provider Routing and Switching - Specialist (JNCIS-SP)

Pass Juniper JN0-362 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/jn0-362.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper Official Exam Center

QUESTION 1

Which IPv6 extension header notifies intermediary devices that they must inspect the packet\\'s options?

A. destination options header

B. routing header

C. hop-by-hop options header

D. fragment header

Correct Answer: B

Reference: https://en.wikipedia.org/wiki/IPv6_packet

QUESTION 2

To which multicast address is a VRRP advertisement packet sent?

A. 224.0.0.6

B. 224.0.0.18

C. 224.0.0.22

D. 224.0.0.13

Correct Answer: B

Reference: https://tools.ietf.org/html/rfc3768

QUESTION 3

Which two IP addresses are considered Martian addresses? (Choose two.)

A. 0.0.0.0/8

B. 192.168.0.0/8

C. 240.0.0.0/4

D. 169.254.0.0/16

Correct Answer: AC

Reference: https://www.juniper.net/documentation/en_US/junos/topics/topic-map/recognize-martian-addrrouting.html

QUESTION 4

Click the Exhibit button.

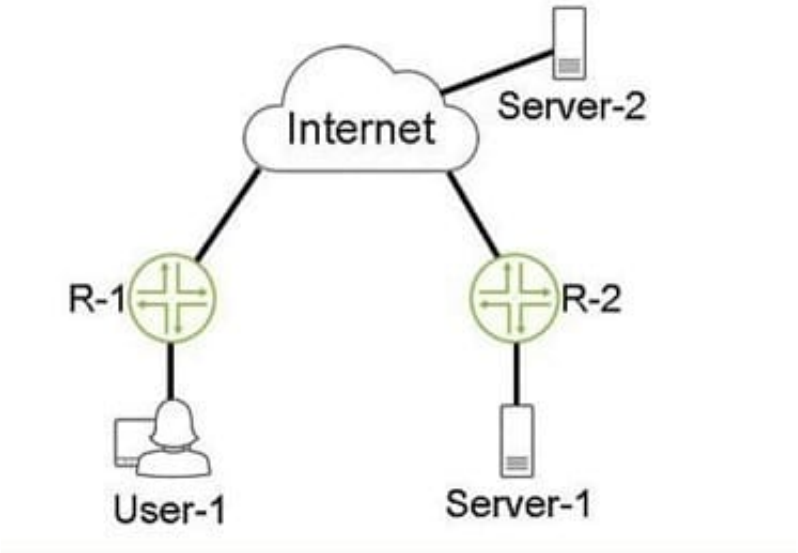

Referring to the exhibit, the GRE tunnel between R-1 and R-2 allows connectivity between User-1 and Server-1. When User-1 communicates with Server-2 with packets that are 1472 bytes in size, no packet fragmentation occurs. User-1 can communicate with Server-1 with packets that are up to 1448 bytes in size with no packet fragmentation. However, if the packet size is larger than 1448 bytes, packet fragmentation occurs.

Why is the packet fragmentation occurring between User-1 and Server-1 in this scenario?

A. The GRE header adds 20 bytes to the packet

B. The GRE header adds 24 bytes to the packet

C. The IP header adds 20 bytes to the packet

D. The IP header adds 24 bytes to the packet

Correct Answer: B

QUESTION 5

You must establish an MPLS LSP between two locations. You are required to ensure that the LSP traverses specific routers within the network.

Which solution is correct in this scenario?

A. Enable traffic engineering within RSVP and enable the Fast Reroute feature

B. Implement RSVP and define the explicit route the LSP must follow

C. Implement LDP and define the explicit route the LSP must follow

D. Enable traffic engineering within LDP and define the explicit route the LSP must follow

Correct Answer: B

JN0-362 PDF Dumps JN0-362 Practice Test JN0-362 Exam Questions