



JN0-362^{Q&As}

Service Provider Routing and Switching - Specialist (JNCIS-SP)

Pass Juniper JN0-362 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-362.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Click the Exhibit button.

```
[edit policy-options]
user@router# show
policy-statement load-balance-all {
    then {
        load-balance per-packet
    }
}
```

You have applied the policy shown in the exhibit to the forwarding table on an MX Series device. How is traffic load-balanced?

- A. per frame
- B. per packet
- C. per segment
- D. per flow

Correct Answer: B

QUESTION 2

Click the Exhibit button.



```
[edit protocols bgp]
user@router# show
group ibgp {
    type internal;
    local-preference 100;
    import bgp-preference;
    neighbor 10.1.1.1;
    neighbor 10.2.2.2;
    neighbor 10.3.3.3;
}
...
[edit policy-options]
user@router# show
policy-statement bgp-preference {
    term 1 {
        from neighbor 10.1.1.1;
        then {
            local-preference 130;
            accept;
        }
    }
    term 2 {
        from neighbor 10.2.2.2;
        then {
            local-preference 90;
            accept;
        }
    }
}
```

Referring to the exhibit, which statement is correct?


- A. Routes from 10.1.1.1 are less preferred than the default local preference
- B. Routes from 10.2.2.2 are less preferred than routes from 10.1.1.1
- C. Routes from 10.3.3.3 are less preferred than the default local preference
- D. Routes from 10.1.1.1 are less preferred than routes from 10.2.2.2

Correct Answer: B

QUESTION 3



Click the Exhibit button.

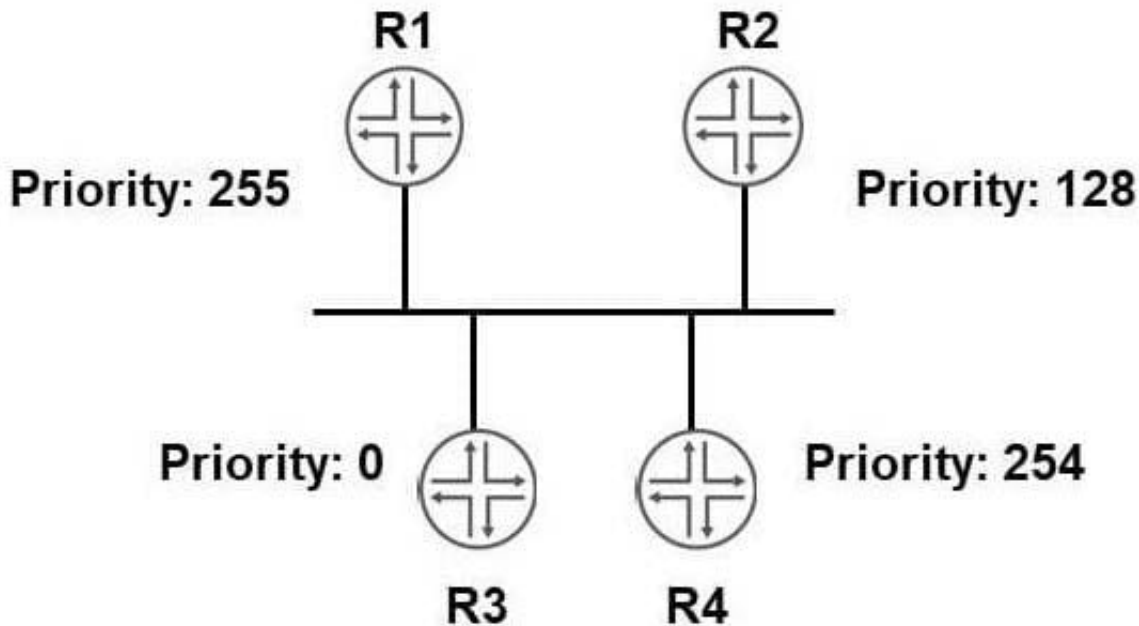

Referring to the exhibit, which statement is correct?

- A. R2 will be the designated router
- B. R3 will not participate in the election process
- C. R1 will not participate in the election process
- D. R4 will be the designated router

Correct Answer: B

Reference: https://www.juniper.net/documentation/en_US/junos/topics/topic-map/configuring-ospfareas.html#id-example-controlling-ospf-designated-router-election

QUESTION 4

According to Juniper Networks, what are two reasons to peer using loopback addresses when configuring BGP? (Choose two.)

- A. When establishing an IBGP connection
- B. When routers are not in the same autonomous system
- C. When routers are not directly connected
- D. When establishing a single-link EBGP connection

Correct Answer: AC

**QUESTION 5**

Click the Exhibit button.

```
[edit protocols ospf area 0.0.0.0]
user@router# show
interface ge-0/0/0.0 {
    bfd-liveness-detection {
        minimum-interval 500;
    }
}
```

Referring to the exhibit, which two statements are true? (Choose two.)

- A. The OSPF neighbor will be declared down if BFD hello packets are not received for 1.5 seconds
- B. The OSPF neighbor will be declared down if BFD hello packets are not received for 5 seconds
- C. The OSPF neighbor will be declared down if 500 BFD hello packets are missed
- D. The OSPF neighbor will be declared down if three BFD hello packets are missed

Correct Answer: AD

[Latest JN0-362 Dumps](#)

[JN0-362 PDF Dumps](#)

[JN0-362 Practice Test](#)