

JN0-451^{Q&As}

Mist AI - Specialist (JNCIS-MistAI)

Pass Juniper JN0-451 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.passapply.com/jn0-451.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



https://www.passapply.com/jn0-451.html 2024 Latest passapply JN0-451 PDF and VCE dumps Download

QUESTION 1

What do 802.11 stations perform to help avoid collisions on the WLAN medium?

- A. 802.11 stations detect collisions and set a back-off timer.
- B. Listen to verify that the medium is free before transmitting.
- C. Stations only transmit when polled by the access point.
- D. Transmit on a fixed schedule.

Correct Answer: B

Reference: https://blogs.arubanetworks.com/industries/understanding-802-11-medium-contention/

QUESTION 2

Which two fields are required when creating a new site? (Choose two.)

- A. RF template
- B. site name
- C. location
- D. time zone

Correct Answer: BC

QUESTION 3

You are deploying multiple Mist APs across many sites in your network. You must ensure that you apply consistent WxLAN and WLAN policies across all sites within the same organization. Which configuration object should be used to accomplish this behavior?

- A. site labels
- B. an RF template
- C. a device profile
- D. a config template

Correct Answer: B


 $Reference: https://www.juniper.net/documentation/en_US/junos-space-apps/network-director 4.0/topics/concept/wireless-rogue-ap.html$

https://www.passapply.com/jn0-451.html

2024 Latest passapply JN0-451 PDF and VCE dumps Download

QUESTION 4

Click the Exhibit button.

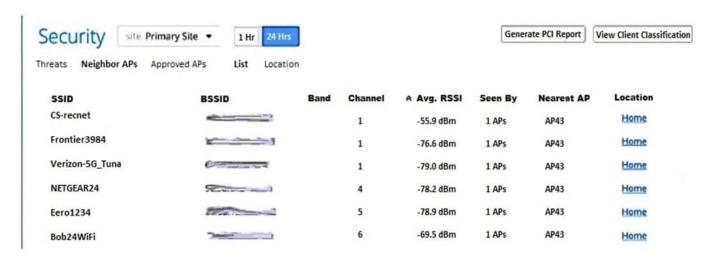

Referring to the exhibit, in the USA, which two statements are correct? (Choose two.)

- A. The WLAN with SSID Eero1234 is not configured to industry best practices.
- B. The WLAN with SSID Eero1234 is configured to industry best practices.
- C. The WLAN with SSID NETGEAR24 is not configured to industry best practices.
- D. The WLAN with SSID NETGEAR24 is configured to industry best practices.

Correct Answer: AC

QUESTION 5

You must define VLANs as untagged, tagged, or using VLAN pooling.

In this scenario, where would you accomplish this task in the Juniper Mist UI?

- A. site settings
- B. WLAN settings
- C. organization settings
- D. policy settings

Correct Answer: B

Latest JN0-451 Dumps

JN0-451 Practice Test

JN0-451 Braindumps