



JN0-648^{Q&As}

Enterprise Routing and Switching, Professional (JNCIP-ENT)

Pass Juniper JN0-648 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-648.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Click the Exhibit button.

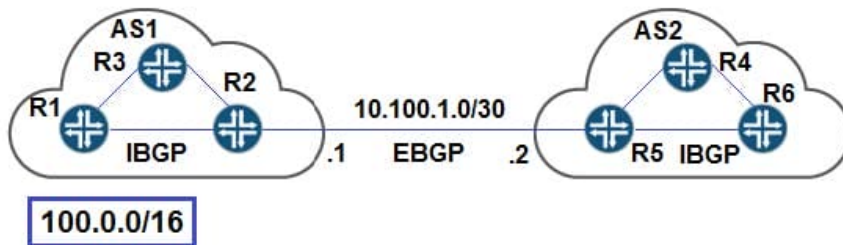

```
user@R2> show route 100.0.0.0/16 terse
```

```
inet.0: 1400327 destinations, 14000327 routes (14000326 active, 0 holddown, 1 hidden)
+= Active Route, - = Last Active, * = Both
```

A	V	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*		100.0.0.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.1.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.2.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.3.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.4.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.5.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
.

Referring to the exhibit, you must advertise the 100.0.0.0/16 routes from AS1 to AS2, but R2 is not advertising any BGP routes to R5.

Why is this happening in this scenario?

- A. The IGBP routes will not be advertised because you must use a policy to advertise IGBP routes.
- B. The IGBP routes are not active and EGBP will advertise only active routes.
- C. The IGBP routes will not be advertised because the AS path shows as incomplete.
- D. The IGBP routes are not active because the next hop is not reachable.

Correct Answer: B

QUESTION 2

Which type of BGP is used to peer with a different autonomous system?



- A. external
- B. classless
- C. dynamic
- D. static

Correct Answer: A

QUESTION 3

Which two statements are true about IS-IS levels? (Choose two.)

- A. Level 1 systems use a default route to reach AS external routes located in other areas.
- B. Level 2 systems must use the loopback address as a part of the ISO network address.
- C. Level 1 systems only from adjacencies with other systems that have different area IDs.
- D. Level 2 systems do not advertise Level 2 routes into a Level 1 area by default.

Correct Answer: AD

QUESTION 4



```
[edit protocols pim]
user@R1# show
rp {
    bootstrap {
        family inet {
            priority 250;
        }
    }
    local {
        address 10.42.0.1;
        group-ranges {
            224.0.0.0/4;
        }
    }
}
interface ge-0/0/0.0 {
    disable;
}
interface all;
```

```
[edit protocols pim]
user@R2# show
rp {
    bootstrap {
        family inet {
            priority 250;
        }
    }
    local {
        address 10.42.0.2;
        group-ranges {
            224.0.0.0/4;
        }
    }
}
interface ge-0/0/0.0 {
    disable;
}
interface all;
```



Referring to the exhibit, there are multiple ASM groups in the 224.0.0.0/4 range.

Which configuration change is needed to ensure R1 is always the RP for group 224.224.1.1?

- A. Set the priority on R1 to zero.
- B. Increase the priority on R1 to higher than R2.
- C. Configure R1 with a higher local RP address.
- D. Ensure R1 has a more specific group range.

Correct Answer: A

QUESTION 5

Which protocol is used for port-level access control and authentication?

- A. MD5
- B. IPsec
- C. 802.1X
- D. AES

Correct Answer: C

[JN0-648 VCE Dumps](#)

[JN0-648 Exam Questions](#)

[JN0-648 Braindumps](#)